

## Blade R downlight



Design iGuzzini

iGuzzini

Last information update: February 2025

### Product configuration: RL18

RL18: Frame Ø 80 - Wide Flood beam - LED

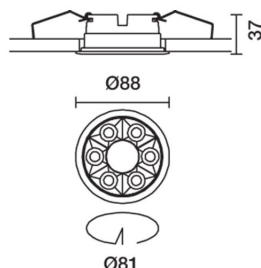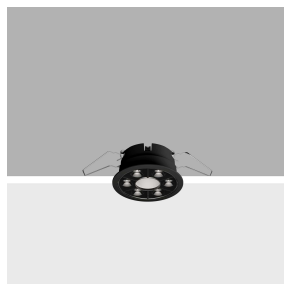

### Product code

RL18: Frame Ø 80 - Wide Flood beam - LED

### Technical description

Ring luminaire with 6 optical elements for LED lamps - fixed optics. The optic system guarantees a high level of visual comfort and no glare. The body includes a radiant surface made of die-cast aluminium. Version includes a perimeter surface frame. High definition reflectors made of thermoplastic material vacuum-metallised with aluminium vapours, integrated in a set-back position in the anti-glare screen. Supplied with a power supply unit connected to the luminaire. Central cover available with separate item code.

### Installation

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - Ø 80 installation hole.

### Colour

White (01) | Black / Black (43) | Black / White (47) | White/Gold (41)\* | White / burnished chrome (E7)\*

### Weight (Kg)

0.3

\* Colours on request

### Mounting

ceiling recessed

### Wiring

On the power supply unit with terminal board included. Available in DALI versions.

### Notes

Central cover to complete the luminaire to be ordered with a separate item code - available in a standard finish, it is designed to be painted with a customised finish.


Complies with EN60598-1 and pertinent regulations



### Technical data

Im system:	924	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W system:	14.5	Voltage [Vin]:	230
Im source:	1100	Lamp code:	LED
W source:	12	Number of lamps for optical assembly:	1
Luminous efficiency (Im/W, real value):	63.7	ZVEI Code:	LED
Im in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	84	Inrush current:	5 A / 220 µs
Beam angle [°]:	58°	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 81 luminaires B16A: 130 luminaires C10A: 135 luminaires C16A: 221 luminaires
CRI (minimum):	90	Minimum dimming %:	1
Colour temperature [K]:	3500	Control:	DALI-2
MacAdam Step:	2		


### Polar

Imax=1195 cd		C15-195		CIE		Lux				
90°	180°	90°	0°	nL 0.84	100-100-100-100-84	h	d1	d2	Em	Emax
				UGR 12.9-13.0	DIN A.61	1	1.1	1.1	940	1184
				UTE 0.84A+0.00T	F*1=996	2	2.2	2.2	235	296
				F*1+F*2=1000	F*1+F*2+F*3=1000	3	3.3	3.3	104	132
				CIBSE LG3 L<1500 cd/m² at 65°	UGR<16   L<1500 cd/mq @65°	4	4.4	4.4	59	74
α=58°										

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	76	72	69	67	71	69	68	66	78
1.0	79	76	73	71	75	73	72	69	83
1.5	83	80	78	77	79	78	77	74	89
2.0	86	84	82	81	83	81	80	78	93
2.5	87	86	85	84	85	83	83	80	96
3.0	88	87	86	86	86	85	84	82	98
4.0	89	88	88	87	87	87	85	83	99
5.0	90	89	89	89	88	88	86	84	100

# Luminance curve limit

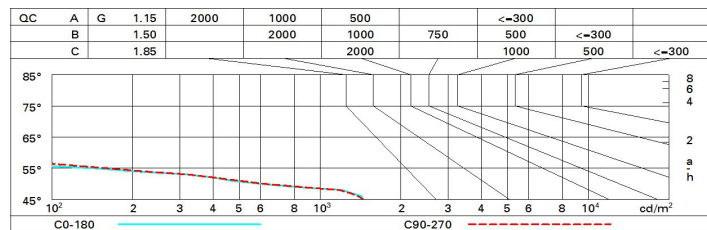

# UGR diagram

Corrected UGR values (at 1100 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	13.5	14.1	13.8	14.3	14.6	13.6	14.2	13.9	14.4	14.7
	3H	13.4	13.9	13.7	14.2	14.5	13.5	14.0	13.8	14.3	14.5
	4H	13.3	13.8	13.6	14.1	14.4	13.4	13.9	13.7	14.2	14.5
	6H	13.2	13.7	13.6	14.0	14.3	13.3	13.8	13.7	14.1	14.4
	8H	13.2	13.6	13.6	14.0	14.3	13.3	13.7	13.6	14.0	14.4
	12H	13.2	13.6	13.5	13.9	14.3	13.2	13.7	13.6	14.0	14.3
4H	2H	13.3	13.8	13.6	14.1	14.4	13.4	13.9	13.7	14.2	14.5
	3H	13.2	13.6	13.5	13.9	14.3	13.2	13.7	13.6	14.0	14.3
	4H	13.1	13.4	13.5	13.8	14.2	13.1	13.5	13.5	13.9	14.3
	6H	13.0	13.3	13.4	13.7	14.1	13.1	13.4	13.5	13.8	14.2
	8H	12.9	13.2	13.4	13.6	14.1	13.0	13.3	13.5	13.7	14.2
	12H	12.9	13.1	13.3	13.6	14.0	13.0	13.2	13.4	13.7	14.1
8H	4H	12.9	13.2	13.4	13.6	14.1	13.0	13.3	13.5	13.7	14.2
	6H	12.8	13.1	13.3	13.5	14.0	12.9	13.2	13.4	13.6	14.1
	8H	12.8	13.0	13.3	13.5	13.9	12.9	13.1	13.3	13.5	14.0
	12H	12.7	12.9	13.2	13.4	13.9	12.8	13.0	13.3	13.5	14.0
12H	4H	12.9	13.1	13.3	13.6	14.0	13.0	13.2	13.4	13.7	14.1
	6H	12.8	13.0	13.3	13.5	13.9	12.9	13.1	13.3	13.5	14.0
	8H	12.7	12.9	13.2	13.4	13.9	12.8	13.0	13.3	13.5	14.0
Variations with the observer position at spacing:											
S =	1.0H	6.7 / -28.1					6.7 / -27.6				
	1.5H	9.5 / -30.7					9.5 / -30.1				
	2.0H	11.5 / -30.9					11.5 / -30.3				