

Last information update: April 2025

**Product configuration: RM34.F6**

RM34.F6: Ø 212 mm - warm white - WW - DALI - White/Transparent/Chrome

**Product code**

RM34.F6: Ø 212 mm - warm white - WW - DALI - White/Transparent/Chrome

**Technical description**

Round fixed luminaire designed to use LED lamps with C.o.B. technology. Version with rim for surface-mounting. Prismatic thermoplastic reflector complete with flux enhancer and metallised flap to guarantee optimum vertical downlight. Dissipater made of painted grey die-cast aluminium. Product complete with LED lamp in warm white colour tone (3500K). Wall-washer light emission.

**Installation**

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 25 mm.

**Colour**

White/Transparent/Chrome (F6)

**Weight (Kg)**


1.15

**Mounting**

ceiling surface

**Wiring**

Product complete with DALI components



Complies with EN60598-1 and pertinent regulations




IP20

IP54

On the visible part of  
the product once installed**Technical data**

lm system:	2656	Colour temperature [K]:	3500
W system:	25.3	MacAdam Step:	2
lm source:	3200	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	22	Lamp code:	LED
Luminous efficiency (lm/W, real value):	105	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	83	Control:	DALI-2
CRI (minimum):	90		

Polar

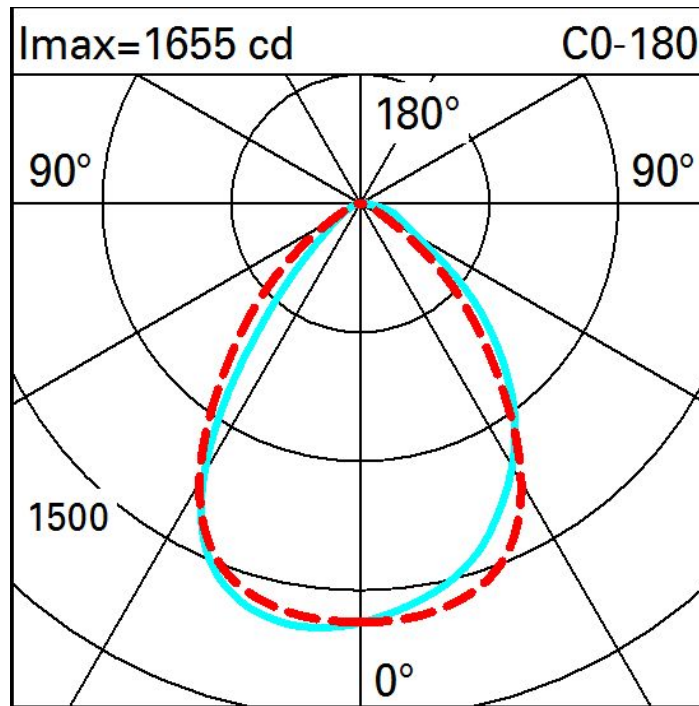

Illuminances

Lux												Wall distance = 1m											
3																							
	2	4	10	28	85	138	85	28	10	4	2												
2	3	6	17	61	171	252	171	61	17	6	3												
	4	12	36	87	155	192	155	87	36	12	4												
1	9	19	39	71	104	119	104	71	39	19	9												
	11	21	35	52	67	74	67	52	35	21	11												
0																							
	m	-2	-1			0			1	2	3												