
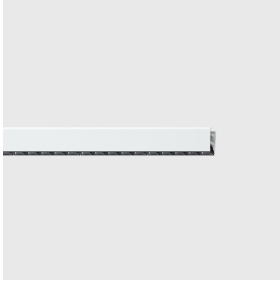


Last information update: April 2025

**Product configuration: RP30.M6**

RP30.M6: DownLight emission module - Frameless - L= 1824 - 48Vdc (PWM) - General Light - Space Optic – Warm White - White/Black Transparent

**Product code**

RP30.M6: DownLight emission module - Frameless - L= 1824 - 48Vdc (PWM) - General Light - Space Optic – Warm White - White/Black Transparent

**Technical description**

Direct emission linear modular lighting system with Warm White CRI90 monochrome LED lamps. General Light (High Output) luminaire with Opti-Diamond Space optic available in a White Cover (Transparent white) or Black Cover (Transparent black) version. Complete with 48Vdc Mid-Power Led circuit and PWM control system. Frameless version with extruded aluminium profile; Modular luminaire that can be positioned freely as it rotates 360° around its own axis (See the instruction sheet for the accessories to be used).

**Installation**

Pendant or surface-mounted using suitable accessories to be ordered separately.

**Colour**

White/Black Transparent (M6)

**Weight (Kg)**

1.01

**Wiring**

Connection with quick coupling input and output connectors. The module is designed to use suitable Led Strips (Up Light emission) to be ordered separately. Power supply unit (48V) to be ordered separately as specified in the instruction sheet. Available in an ON-OFF, DALI and BLE version.

Complies with EN60598-1 and pertinent regulations




IP20

**Technical data**

lm system:	3145
W system:	25
lm source:	4250
W source:	25
Luminous efficiency (lm/W, real value):	125.8
lm in emergency mode:	-
Total light flux at or above an angle of 90° [Lm]:	0
Light Output Ratio (L.O.R.) [%]:	74
CRI (minimum):	90

Colour temperature [K]:	3000
MacAdam Step:	3
Lamp code:	LED
Number of lamps for optical assembly:	1
ZVEI Code:	LED
Number of optical assemblies:	1
LED current [mA]:	77
Control:	PWM

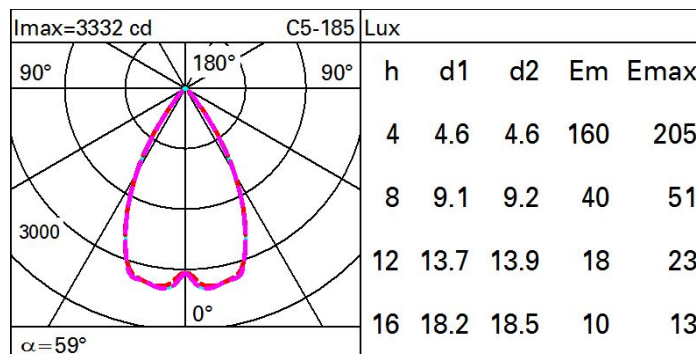**Polar**

# Isolux

