

Last information update: May 2025

Product configuration: RU37.12+RW70.04

RU37.12: Linear module - recessed Minimal Down - for MMO/Space/Wall Washer versions - L=3576 - Aluminium

RW70.04: Plate with Neutral White LED - Downlight - Wall Washer - HO - DALI - L=1192 - 19W 1668.8lm - 4000K - CRI 90 - Black

**Product code**

RU37.12: Linear module - recessed Minimal Down - for MMO/Space/Wall Washer versions - L=3576 - Aluminium

Technical description

Recessed Minimal (Frameless) version with extruded aluminium profile installed flush with ceiling. Designed for use with an LED plate in MMO, Space and Wall Washer versions.

Installation

Can be recess-mounted.

Colour

Aluminium (12)

Wiring

Designed to house the LED modules that can be used by the system.

Complies with EN60598-1 and pertinent regulations

**Product code**

RW70.04: Plate with Neutral White LED - Downlight - Wall Washer - HO - DALI - L=1192 - 19W 1668.8lm - 4000K - CRI 90 - Black

Technical description

Neutral White LED plate with direct (Down) light emission. Wall Washer High Output (HO) Wall Washer version to be used with suitable profiles to be ordered separately. The module optic and structural fittings allow high luminous flux and system efficiency values. DALI dimmable power supply integrated in the luminaire. Extruded aluminium heat sink formally designed to house the exclusive asymmetric optic system that generates an even and effective wall washer emission. Linear PMMA screen combined with a special acrylic film; anodised aluminium main beam reflector and side reflectors. "Halogen Free" electric cables.

Installation

Module insertion on profiles facilitated by a quick coupling system.

Colour
Black (04)

Weight (Kg)
1.89

Wiring

Quick coupling terminal block connection to simplify connections between the subsequent modules. Complete with integrated dimmable DALI power supply.

Complies with EN60598-1 and pertinent regulations




IP20

**Technical data**

Im system:	5001	Colour temperature [K]:	4000
W system:	56.9	MacAdam Step:	3
Im source:	8930	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	50	Lamp code:	LED
Luminous efficiency (lm/W, real value):	87.9	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	1	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	56	Number of optical assemblies:	1
CRI (minimum):	90	Control:	DALI-2

Polar

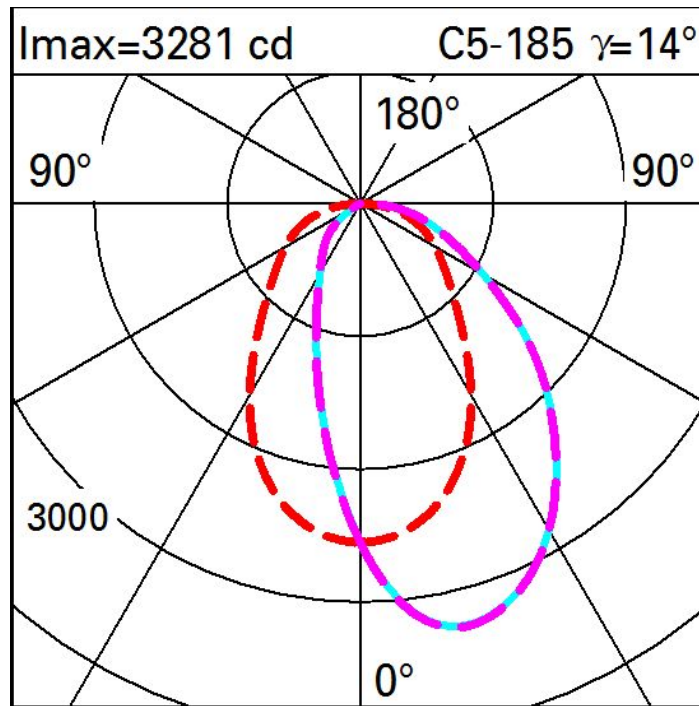

Illuminances

Lux													Wall distance = 1m	
3														
	16	32	71	170	402	611	402	170	71	32	16			
2	24	45	93	219	509	711	509	219	93	45	24			
	26	48	98	217	379	471	379	217	98	48	26			
1	27	47	90	165	244	284	244	165	90	47	27			
	26	45	76	117	153	171	153	117	76	45	26			
0														
	m	-2	-1	0	1	2	3							