


Last information update: May 2025

**Product configuration: SR73.15**

SR73.15: 47 surface Remote – Neutral White – 48 Vdc DALI – L=340mm – Wall Grazing Medium optic - 13.5W 756lm - 4000K - Grey

**Product code**

SR73.15: 47 surface Remote – Neutral White – 48 Vdc DALI – L=340mm – Wall Grazing Medium optic - 13.5W 756lm - 4000K - Grey

**Technical description**

Direct light luminaire, designed to use monochrome LED lamps, DALI 48Vdc dimmable with searching and addressing function. Ceiling, wall or surface-mounted. It consists of a body and installation brackets to be ordered separately. The body is made of extruded aluminium and includes die-cast aluminium end caps with 50/60 Shore A silicone seals. It is subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The following painting stage consists of a primer and a liquid acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. The top of the optical assembly is closed by a 3 mm thick transparent glass screen, fixed with silicone. Complete with multi-LED plate in Neutral White and a 48V dc DALI electronic driver (power supply to be ordered separately). Supplied with a double PG11 and outlet cables for pass-through wiring with IP68 male/female joiners. Fitted with optics with a plastic (methacrylate) lens for Wall Grazing Medium lighting. All external screws used are made of A2 stainless steel. The luminaire technical characteristics conform to EN 60598-1 standards and particular requirements.

**Installation**

Accessories are available for installation, like adjustable AISI304 stainless steel wall-mounted arms.

**Colour**

Grey (15)

**Mounting**

wall arm|wall surface|ceiling surface

**Wiring**

Complete with DALI 44÷52Vdc control card. The product is supplied with a nickel-plated brass PG11 double cable gland and 05RN-F 2x1.5mm<sup>2</sup>+3x0.35mm<sup>2</sup> rubber outlet cables for pass-through wiring with connectors. Available for electrical connection and DALI control: IP68 4-pin female connector, IP68 4-pin male connector + closing cap, and IP68 4-pin male + female connectors.

**Notes**


Complete with electronic control card. power supply to be ordered separately. Insulation class II.

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	756	MacAdam Step:	3
W system:	13.5	Life Time LED 1:	100,000h - L80 - B10 (Ta 25°C)
Im source:	1400	Life Time LED 2:	100,000h - L80 - B10 (Ta 40°C)
W source:	10	Voltage [Vin]:	48
Luminous efficiency (Im/W, real value):	56	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	54	Number of optical assemblies:	1
CRI (minimum):	80	Intervallo temperatura ambiente:	from -30°C to 50°C.
Colour temperature [K]:	4000	Control:	DALI-2

Polar

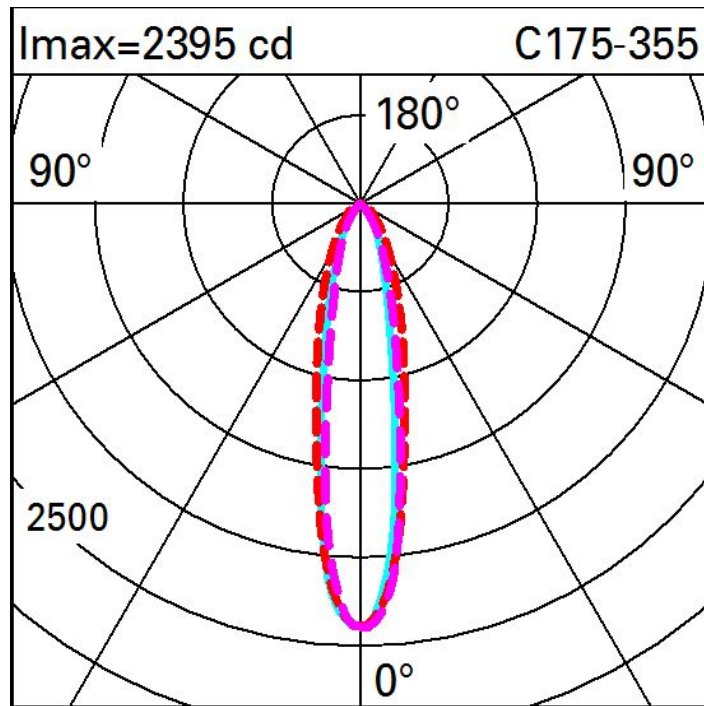

Illuminances

Lux													Wall distance = 1m	
3														
	0.1	0.3	0.6	2	4	5	4	2	0.6	0.3	0.1			
2	0.8	2	3	5	9	11	9	5	3	2	0.8			
	1	2	4	9	17	21	17	9	4	2	1			
1	1	2	5	11	18	24	18	11	5	2	1			
	2	3	6	10	16	21	16	10	6	3	2			
0														
	m	-2	-1	0	1	2	3							