


Last information update: May 2024

**Product configuration: Q390+INCA**

Q390: Frame Angular Module - General Down Light - Warm LED

INCA: Recessed

**Product code**Q390: Frame Angular Module - General Down Light - Warm LED **Attention! Code no longer in production****Technical description**

Angular element for Frame version profiles with contact frame; including a Warm LED module. Methacrylate opal screen (diffused general light); screen set up for connecting several lengths by overlapping. Integrated control gear. Pass-through wiring for continuous lines:

**Installation**

Recessed using the brackets on the profile.

**Colour**

White (01) | Aluminium (12)

**Weight (Kg)**

5.1

**Mounting**

ceiling recessed

**Wiring**

The angular profile is supplied with pass-through wiring for continuous lines. Quick coupling terminal blocks to simplify connections between the luminaires. LED module complete with integrated electronic control gear.

**Notes**

Take care when configuring the system; to complete a continuous line with an angular profile correctly, two initial modules are required, one for each side of the corner.


Complies with EN60598-1 and pertinent regulations



IP20

**Technical data**

lm system:	3700	Colour temperature [K]:	3000
W system:	34.5	MacAdam Step:	3
lm source:	2500	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	15	Voltage [Vin]:	230
Luminous efficiency (lm/W, real value):	107.2	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	74	Number of optical assemblies:	2
CRI (minimum):	80		

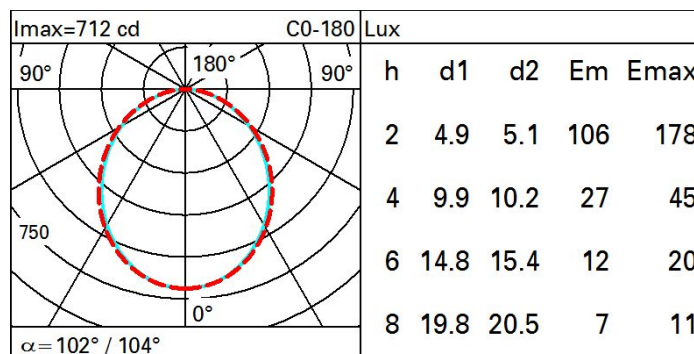**Polar**

# Isolux

