

Coefficients d'utilisation

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	68	65	78
1.0	78	75	72	70	74	72	71	69	83
1.5	82	79	77	76	78	77	76	73	89
2.0	85	83	81	80	82	80	79	77	93
2.5	86	85	84	83	84	83	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	88	87	86	85	83	100

Courbe limite de luminance

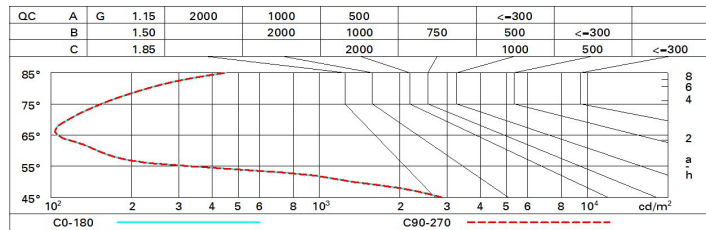


Diagramme UGR

Corrected UGR values (at 940 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceil/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	17.1	17.6	17.4	17.8	18.0	17.1	17.6	17.4	17.8	18.0
	3H	17.0	17.4	17.3	17.7	17.9	17.0	17.4	17.3	17.7	17.9
	4H	16.9	17.3	17.2	17.6	17.9	16.9	17.3	17.2	17.6	17.9
	6H	16.8	17.2	17.2	17.5	17.8	16.8	17.2	17.2	17.5	17.8
	8H	16.8	17.2	17.2	17.5	17.8	16.8	17.2	17.2	17.5	17.8
	12H	16.8	17.1	17.1	17.4	17.8	16.8	17.1	17.1	17.4	17.8
4H	2H	16.9	17.3	17.2	17.6	17.9	16.9	17.3	17.2	17.6	17.9
	3H	16.8	17.1	17.1	17.4	17.8	16.8	17.1	17.1	17.4	17.8
	4H	16.7	17.0	17.1	17.3	17.7	16.7	17.0	17.1	17.3	17.7
	6H	16.6	16.8	17.0	17.2	17.7	16.6	16.8	17.0	17.2	17.7
	8H	16.5	16.8	17.0	17.2	17.6	16.5	16.8	17.0	17.2	17.6
	12H	16.5	16.7	16.9	17.1	17.6	16.5	16.7	16.9	17.1	17.6
8H	4H	16.5	16.8	17.0	17.2	17.6	16.5	16.8	17.0	17.2	17.6
	6H	16.4	16.6	16.9	17.1	17.6	16.4	16.6	16.9	17.1	17.6
	8H	16.4	16.6	16.9	17.0	17.5	16.4	16.6	16.9	17.0	17.5
	12H	16.3	16.5	16.8	17.0	17.5	16.3	16.5	16.8	17.0	17.5
12H	4H	16.5	16.7	16.9	17.1	17.6	16.5	16.7	16.9	17.1	17.6
	6H	16.4	16.6	16.9	17.0	17.5	16.4	16.6	16.9	17.0	17.5
	8H	16.3	16.5	16.8	17.0	17.5	16.3	16.5	16.8	17.0	17.5
Variations with the observer position at spacing:											
S =	1.0H	6.5 / -24.9					6.5 / -24.9				
	1.5H	9.4 / -25.6					9.4 / -25.6				
	2.0H	11.4 / -25.8					11.4 / -25.8				