


Last information update: May 2024

Product configuration: MP24

MP24: rectangular recessed luminaire with 2 optical assemblies - warm white passive dissipation LEDs - integrated DALI control gear - medium

**Product code**MP24: rectangular recessed luminaire with 2 optical assemblies - warm white passive dissipation LEDs - integrated DALI control gear - medium **Attention! Code no longer in production****Technical description**

Multiple recessed adjustable removable luminaire for LED lamp with passive heat dissipation system. Sheet steel perimeter frame. Main structure made of die-cast aluminium. Steel rotation hinges. Die-cast aluminium lamp bodies with shaped surface for high level radiant effect for effectively reducing the temperature and keeping the long-term LED lamp performance unchanged. Chrome-plated aluminium lamp body closing rings. Riflettori con ottica ad alta efficienza in alluminio superpuro - apertura medium. Orientamento dei corpi con dispositivi di manovra manuale: interno 29° - esterno 75° - rotazione sull'asse 355°; in fase di orientamento e rotazione i corpi lampada sono soggetti ad alcune limitazioni consultabili sul foglio istruzioni. Supplied with DALI dimmable control gear units connected to the luminaire. Warm white high efficiency LED.

Installation

recessed: preparation slot 138 x 270 mm; perimeter frame preliminary fixing on false ceiling (min. thickness 1 mm) with adjustable metal brackets; main structure inserted and mechanically locked on the frame

Colour

White / Aluminium (39) | Grey / Black / Aluminium (E1)

Mounting

ceiling recessed

Wiring

on control gear box with quick-coupling connections; each lamp body has a specific ballast, allowing separate switch ons

Notes

the configuration of the lamp bodies causes some limitations during angling and rotation; consult the instructions leaflet

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	3160	CRI:	80
W system:	31	Colour temperature [K]:	3000
lm source:	2000	MacAdam Step:	2
W source:	13	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	101.9	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	79	Number of optical assemblies:	2
Beam angle [°]:	22°	Control:	DALI


Polar

Imax=5315 cd	CIE nL 0.79 95-100-100-100-79 UGR 15.4-15.4 DIN A.61 UTE 0.79A+0.00T F*1=954 F*1+F*2=997 F*1+F*2+F*3=1000 CIBSE LG3 L<1500 cd/m ² at 65° UGR<16 L<1500 cd/mq @65°	Lux			
		h	d	Em	E _{max}
90°		2	0.8	1050	1329
180°		4	1.6	262	332
6000		6	2.3	117	148
0°		8	3.1	66	83
α=22°					

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	70	66	63	61	65	62	62	59	75
1.0	73	70	67	65	69	66	66	63	80
1.5	77	75	72	71	74	72	71	68	87
2.0	80	78	76	75	77	75	74	72	91
2.5	81	80	79	78	79	78	77	75	94
3.0	82	81	80	80	80	79	78	76	96
4.0	84	83	82	81	81	81	80	78	98
5.0	84	83	83	83	82	82	80	78	99

Luminance curve limit

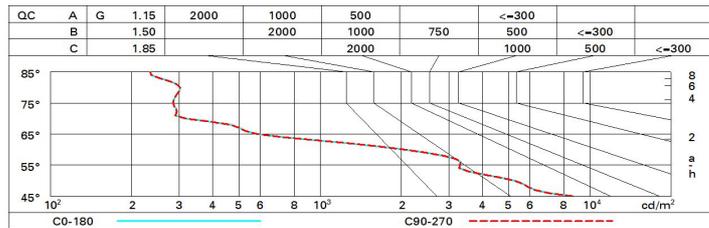

UGR diagram

Corrected UGR values (at 2000 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	10.3	17.9	16.0	18.2	18.5	10.3	17.9	16.0	18.2	18.5
	3H	10.2	17.4	16.5	17.7	18.0	10.2	17.4	16.5	17.7	18.0
	4H	10.1	17.2	16.4	17.5	17.8	10.1	17.2	16.5	17.5	17.8
	6H	10.0	17.1	16.4	17.4	17.8	10.0	17.1	16.4	17.4	17.8
	8H	15.9	17.0	16.3	17.4	17.7	15.9	17.0	16.3	17.4	17.8
12H	15.9	17.0	16.3	17.3	17.7	15.9	17.0	16.3	17.3	17.7	
4H	2H	10.1	17.2	16.5	17.5	17.8	10.1	17.2	16.4	17.5	17.8
	3H	15.9	17.0	16.3	17.3	17.7	15.9	17.0	16.3	17.3	17.7
	4H	15.8	16.8	16.2	17.2	17.6	15.8	16.8	16.2	17.2	17.6
	6H	15.6	16.8	16.0	17.3	17.7	15.6	16.8	16.0	17.3	17.7
	8H	15.4	16.9	15.9	17.3	17.8	15.4	16.9	15.9	17.3	17.8
12H	15.3	16.9	15.8	17.3	17.8	15.3	16.9	15.8	17.3	17.8	
8H	4H	15.4	16.9	15.9	17.3	17.8	15.4	16.9	15.9	17.3	17.8
	6H	15.3	16.7	15.8	17.2	17.7	15.3	16.7	15.8	17.2	17.7
	8H	15.3	16.5	15.8	17.0	17.5	15.3	16.5	15.8	17.0	17.5
	12H	15.4	16.3	15.9	16.7	17.3	15.4	16.3	15.9	16.7	17.3
12H	4H	15.3	16.9	15.8	17.3	17.8	15.3	16.9	15.8	17.3	17.8
	6H	15.3	16.5	15.8	17.0	17.5	15.3	16.5	15.8	17.0	17.5
	8H	15.4	16.3	15.9	16.7	17.3	15.4	16.3	15.9	16.7	17.3
Variations with the observer position at spacing:											
S =	1.0H	4.3 / -9.6					4.3 / -9.6				
	1.5H	7.1 / -15.0					7.1 / -15.0				
	2.0H	9.1 / -18.0					9.1 / -18.0				