

Last information update: May 2024

Product configuration: MC27

MC27: Square recessed luminaire - 226x226 mm H=146 mm - neutral white - electronic ballast - general light optic with controlled luminance UGR<19

**Product code**MC27: Square recessed luminaire - 226x226 mm H=146 mm - neutral white - electronic ballast - general light optic with controlled luminance UGR<19 **Attention! Code no longer in production****Technical description**

Recessed fixed square luminaire designed to use a LED lamp. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with 2000 lm LED unit in a neutral white tone 4000K and electronic driver separate from the luminaire. General light distribution, with controlled luminance (UGR<19).

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 25 mm.

Colour

White / Aluminium (39)

Weight (Kg)

2.21

Mounting

ceiling recessed

Wiring

Product complete with electronic components


Complies with EN60598-1 and pertinent regulations



IP20

IP23

On the visible part of the product once installed

**Technical data**

lm system:	1819	CRI:	80
W system:	18.8	Colour temperature [K]:	4000
lm source:	2000	MacAdam Step:	3
W source:	16	Life Time LED 1:	50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	96.8	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	91	Number of optical assemblies:	1


Polar

Imax=1539 cd		C0-180		CIE		Lux	
90°	180°	90°	0°	nL 0.91		h	d1 d2 Em Emax
				86-100-100-100-91		1	1.3 1.3 1105 1539
				UGR 16.7-16.7		2	2.6 2.6 276 385
				DIN A.61		3	3.9 3.9 123 171
				UTE 0.91A+0.00T		4	5.2 5.2 69 96
				F*1=860			
				F*1+F*2=999			
				F*1+F*2+F*3=1000			
				CIBSE LG3 L<1500 cd/m² at 65°			
				UGR<19 L<1500 cd/mq @65°			

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	76	71	67	64	70	66	66	62	68
1.0	81	76	72	69	75	71	71	67	74
1.5	87	83	80	78	82	79	78	75	83
2.0	90	88	85	83	86	84	83	80	88
2.5	92	90	88	87	89	87	86	83	92
3.0	94	92	91	89	90	89	88	85	94
4.0	95	94	93	92	92	91	90	87	96
5.0	96	95	94	93	93	92	91	88	97

Luminance curve limit

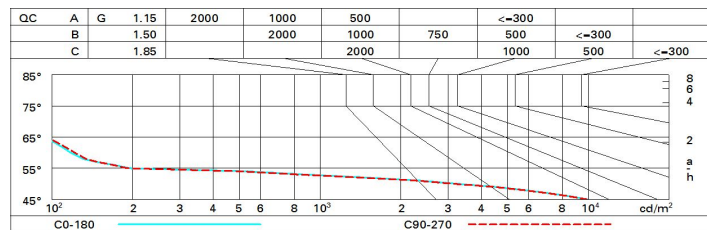

UGR diagram

Corrected UGR values (at 2000 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	17.2	18.0	17.5	18.2	18.4	17.2	17.9	17.5	18.2	18.4
	3H	17.1	17.7	17.4	18.0	18.3	17.1	17.8	17.4	18.0	18.3
	4H	17.0	17.6	17.3	17.9	18.2	17.0	17.6	17.4	17.9	18.2
	6H	16.9	17.5	17.3	17.8	18.1	16.9	17.5	17.3	17.8	18.1
	8H	16.9	17.4	17.3	17.8	18.1	16.9	17.4	17.3	17.8	18.1
	12H	16.9	17.4	17.2	17.7	18.1	16.9	17.4	17.3	17.7	18.1
4H	2H	17.0	17.6	17.4	17.9	18.2	17.0	17.6	17.3	17.9	18.2
	3H	16.9	17.4	17.3	17.7	18.1	16.9	17.4	17.3	17.7	18.1
	4H	16.8	17.2	17.2	17.6	18.0	16.8	17.2	17.2	17.6	18.0
	6H	16.7	17.1	17.1	17.5	17.9	16.7	17.1	17.1	17.5	17.9
	8H	16.7	17.0	17.1	17.4	17.9	16.7	17.0	17.1	17.4	17.9
	12H	16.6	16.9	17.1	17.4	17.8	16.6	16.9	17.1	17.4	17.8
8H	4H	16.7	17.0	17.1	17.4	17.9	16.7	17.0	17.1	17.4	17.9
	6H	16.6	16.9	17.0	17.3	17.8	16.6	16.9	17.0	17.3	17.8
	8H	16.5	16.8	17.0	17.2	17.7	16.5	16.8	17.0	17.2	17.7
	12H	16.5	16.7	17.0	17.2	17.7	16.5	16.7	17.0	17.2	17.7
12H	4H	16.6	16.9	17.1	17.4	17.8	16.6	16.9	17.1	17.4	17.8
	6H	16.5	16.8	17.0	17.2	17.7	16.5	16.8	17.0	17.2	17.7
	8H	16.5	16.7	17.0	17.2	17.7	16.5	16.7	17.0	17.2	17.7
Variations with the observer position at spacing:											
S =	1.0H	2.9 / -18.5					2.9 / -18.7				
	1.5H	4.3 / -25.8					4.3 / -25.6				
	2.0H	6.2 / -26.6					6.3 / -26.4				