

Pixel Pro



Design Iosa Ghini

iGuzzini

Last information update: April 2024

Product configuration: Q205

Q205: square recessed luminaire - warm white passive dissipation LED - integrated DALI control gear - flood

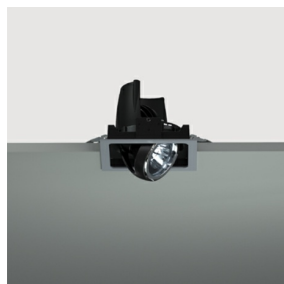

Product code

Q205: square recessed luminaire - warm white passive dissipation LED - integrated DALI control gear - flood **Attention! Code no longer in production**

Technical description

Recessed adjustable removable luminaire for LED lamp with passive heat dissipation system. Square sheet steel perimeter frame. Main structure made of die-cast aluminium. Steel rotation hinges. Die-cast aluminium lamp body with shaped surface for high level radiant effect for effectively reducing the temperature and keeping the long-term LED lamp performance unchanged. Chrome-plated aluminium lamp body closing ring. Reflector with high efficiency super-pure aluminium optic - flood beam angle. Orientamento del corpo con dispositivo di manovra manuale: interno 29° - esterno 75° - rotazione sull'asse 355°. Supplied with DALI dimmable control gear connected to the luminaire. Warm white high efficiency LED.

Installation

recessed using steel springs for false ceilings with thicknesses starting at 1 mm; preparation slot 142 x 142 mm

Colour

White / Aluminium (39) | Grey / Black / Aluminium (E1)

Weight (Kg)

0.95

Mounting

ceiling recessed

Wiring

on control gear box with quick-coupling connections


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	2367	CRI:	80
W system:	24.6	Colour temperature [K]:	3000
Im source:	3000	MacAdam Step:	2
W source:	22	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	96.2	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	79	Number of optical assemblies:	1
Beam angle [°]:	42°	Control:	DALI


Polar

	CIE				Lux			
	nL 0.79				h	d	Em	Emax
	97-100-100-100-79				2	1.5	789	1018
	UGR 16.7-16.7				4	3.1	197	255
	DIN				6	4.6	88	113
	A.61				8	6.1	49	64
	UTE							
	0.79A+0.00T							
	F*1=968							
	F*1+F*2=998							
F*1+F*2+F*3=1000								
CIBSE								
LG3 L<1500 cd/m² at 65°								
UGR<19 L<1500 cd/mq @65°								

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	70	66	64	61	66	63	63	60	76
1.0	73	70	67	66	69	67	67	64	81
1.5	77	75	73	71	74	72	71	69	87
2.0	80	78	77	75	77	76	75	72	92
2.5	82	80	79	78	79	78	77	75	95
3.0	83	82	81	80	80	79	78	76	97
4.0	84	83	82	82	81	81	80	78	99
5.0	84	84	83	83	82	82	80	79	100

Luminance curve limit

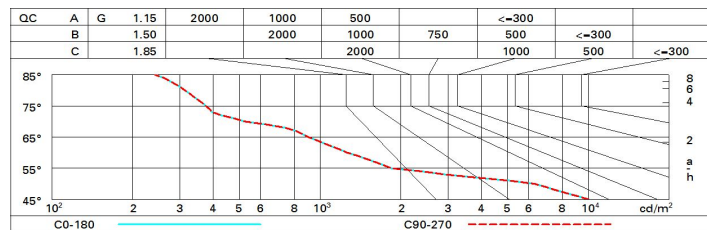

UGR diagram

Corrected UGR values (at 3000 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	17.3	18.0	17.6	18.2	18.4	17.3	18.0	17.6	18.2	18.4
	3H	17.1	17.7	17.5	18.0	18.3	17.1	17.7	17.5	18.0	18.3
	4H	17.1	17.6	17.4	17.9	18.2	17.1	17.6	17.4	17.9	18.2
	6H	17.0	17.5	17.3	17.8	18.2	17.0	17.5	17.3	17.8	18.2
	8H	17.0	17.5	17.3	17.8	18.1	17.0	17.5	17.3	17.8	18.1
	12H	16.9	17.4	17.3	17.7	18.1	16.9	17.4	17.3	17.7	18.1
4H	2H	17.1	17.6	17.4	17.9	18.2	17.1	17.6	17.4	17.9	18.2
	3H	16.9	17.4	17.3	17.7	18.1	16.9	17.4	17.3	17.7	18.1
	4H	16.8	17.3	17.2	17.6	18.0	16.8	17.3	17.2	17.6	18.0
	6H	16.8	17.1	17.2	17.5	17.9	16.8	17.1	17.2	17.5	17.9
	8H	16.7	17.0	17.1	17.5	17.9	16.7	17.0	17.1	17.5	17.9
	12H	16.7	17.0	17.1	17.4	17.8	16.7	17.0	17.1	17.4	17.8
8H	4H	16.7	17.0	17.1	17.5	17.9	16.7	17.0	17.1	17.5	17.9
	6H	16.6	16.9	17.1	17.3	17.8	16.6	16.9	17.1	17.3	17.8
	8H	16.6	16.8	17.0	17.3	17.8	16.6	16.8	17.0	17.3	17.8
	12H	16.5	16.7	17.0	17.2	17.7	16.5	16.7	17.0	17.2	17.7
12H	4H	16.7	17.0	17.1	17.4	17.8	16.7	17.0	17.1	17.4	17.8
	6H	16.6	16.8	17.0	17.3	17.8	16.6	16.8	17.0	17.3	17.8
	8H	16.5	16.7	17.0	17.2	17.7	16.5	16.7	17.0	17.2	17.7
Variations with the observer position at spacing:											
S =		1.0H					5.1 / -14.3				
		1.5H					7.9 / -16.4				
		2.0H					9.9 / -17.8				