

Last information update: May 2024

Product configuration: ME85+9695.15

ME85: iplan - 596 x 596 mm h 26 mm - warm white LED - electronic control gear - general light optic

9695.15: Adapter for installation in plasterboard false ceilings - Grey

**Product code**ME85: iplan - 596 x 596 mm h 26 mm - warm white LED - electronic control gear - general light optic **Attention! Code no longer in production****Technical description**

Direct emission recessed or ceiling-mounted luminaire designed to use warm white 3000K high colour rendering LEDs. The optical assembly consists of an anodised extruded frame, a methacrylate diffuser screen for general light emission and a painted sheet metal rear closing base. The LEDs are arranged inside the perimeter and the driver is housed in the product.

Installation

Recessed in plasterboard false ceilings (using accessory frame), in false ceilings with frame, in modular false ceilings (even 625 x 625 mm using accessory adapter); possibility of ceiling-mounting using kit to be ordered separately as an accessory

Colour

Grey (15)

Weight (Kg)

7

Mounting

ceiling recessed|ceiling surface

Wiring

product complete with electronic components


Complies with EN60598-1 and pertinent regulations



IP20

IP43

On the visible part of the product once installed

**Accessory code**

9695.15: Adapter for installation in plasterboard false ceilings - Grey

Technical description

Accessory for installation in plasterboard false ceiling for square versions

Colour


Aluminium (12)

Complies with EN60598-1 and pertinent regulations

Technical data

lm system:	4255	CRI (minimum):	80
W system:	40.3	Colour temperature [K]:	3000
lm source:	5750	MacAdam Step:	3
W source:	35	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	105.6	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	74	Number of optical assemblies:	1

Polar

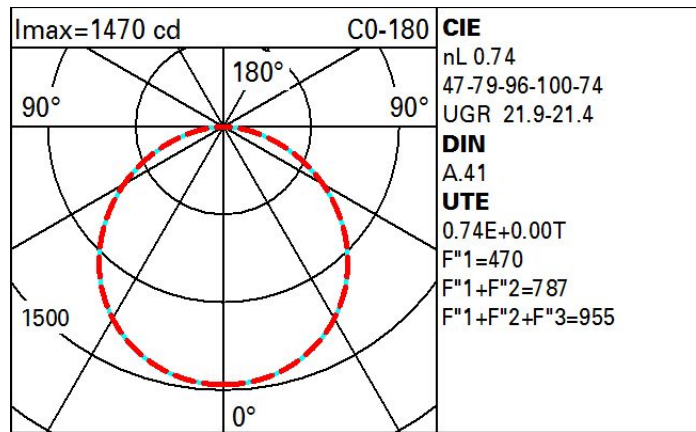

UGR diagram

Corrected UGR values (at 5750 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	18.0	19.2	18.3	19.5	19.8	18.0	19.3	18.4	19.5	19.8
	3H	19.6	20.7	19.9	21.0	21.3	18.5	19.6	18.9	19.9	20.2
	4H	20.2	21.2	20.5	21.5	21.8	18.7	19.7	19.1	20.1	20.4
	6H	20.6	21.6	21.0	21.9	22.3	18.8	19.7	19.2	20.1	20.4
	8H	20.8	21.7	21.2	22.0	22.4	18.8	19.7	19.2	20.1	20.4
	12H	20.9	21.8	21.3	22.1	22.5	18.8	19.7	19.2	20.0	20.4
4H	2H	18.7	19.7	19.1	20.1	20.4	20.2	21.2	20.6	21.5	21.9
	3H	20.4	21.3	20.8	21.7	22.0	20.9	21.8	21.3	22.1	22.5
	4H	21.1	21.9	21.6	22.3	22.7	21.2	22.0	21.6	22.3	22.7
	6H	21.7	22.4	22.2	22.8	23.2	21.4	22.1	21.8	22.5	22.9
	8H	21.9	22.6	22.4	23.0	23.4	21.4	22.1	21.9	22.5	23.0
	12H	22.0	22.6	22.5	23.1	23.5	21.5	22.0	21.9	22.5	22.9
8H	4H	21.4	22.1	21.9	22.5	22.9	22.0	22.6	22.4	23.0	23.5
	6H	22.1	22.7	22.6	23.1	23.6	22.3	22.8	22.8	23.3	23.8
	8H	22.4	22.9	22.9	23.3	23.8	22.5	22.9	22.9	23.4	23.9
	12H	22.6	23.0	23.1	23.5	24.0	22.5	22.9	23.1	23.4	24.0
12H	4H	21.4	22.0	21.9	22.4	22.9	22.1	22.7	22.6	23.1	23.6
	6H	22.2	22.6	22.7	23.1	23.6	22.5	23.0	23.0	23.4	23.9
	8H	22.5	22.9	23.0	23.4	23.9	22.7	23.1	23.2	23.6	24.1
Variations with the observer position at spacing:											
S =		1.0H	0.1 / -0.1		0.1 / -0.1						
		1.5H	0.3 / -0.4		0.3 / -0.3						
		2.0H	0.4 / -0.5		0.4 / -0.5						