



Last information update: March 2024

Product configuration: MV83

MV83: Fixed circular recessed luminaire - Ø 75 mm - warm white - wide flood optic - UGR<19

**Product code**

MV83: Fixed circular recessed luminaire - Ø 75 mm - warm white - wide flood optic - UGR<19

Technical description

Fixed round luminaire designed to use a LED lamp with C.O.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with LED lamp in warm white colour tone CRI90 (3,000K). General light emission, with controlled luminance UGR<19 1500 cd/m² α>65° wide flood optic.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 20 mm.

Colour

White / Aluminium (39)

Weight (Kg)

0.41

Mounting

ceiling recessed

Wiring

product complete with DALI components

Complies with EN60598-1 and pertinent regulations



IP20

IP54

On the visible part of
the product once installed**Technical data**

lm system:	868	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W system:	10.2	Ballast losses [W]:	2.2
lm source:	1100	Lamp code:	LED
W source:	8	Number of lamps for optical assembly:	1
Luminous efficiency (lm/W, real value):	85.1	ZVEI Code:	LED
lm in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	79	Inrush current:	16 A / 220 µs
Beam angle [°]:	52°	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 15 luminaires B16A: 24 luminaires C10A: 24 luminaires C16A: 40 luminaires
CRI (minimum):	90	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Colour temperature [K]:	3000	Control:	DALI-2
MacAdam Step:	2		


Polar

Imax=1243 cd		CIE		Lux			
				h	d	Em	Emax
90°		nL 0.79		1	1	975	1243
		99-100-100-100-79		2	2	244	311
		UGR 15.6-15.6		3	2.9	108	138
		DIN A.61		4	3.9	61	78
		UTE 0.79A+0.00T					
		F*1=994					
		F*1+F*2=1000					
		F*1+F*2+F*3=1000					
		CIBSE LG3 L<1500 cd/m ² at 65°					
		UGR<16 L<1500 cd/m ² @ 65°					
α=52°							

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	71	67	65	63	67	64	64	62	78
1.0	74	71	69	67	70	68	68	65	83
1.5	78	75	74	72	75	73	72	70	88
2.0	80	79	77	76	78	76	75	73	93
2.5	82	81	79	79	79	78	78	75	96
3.0	83	82	81	80	81	80	79	77	98
4.0	84	83	83	82	82	81	80	78	99
5.0	84	84	83	83	83	82	81	79	100

Luminance curve limit

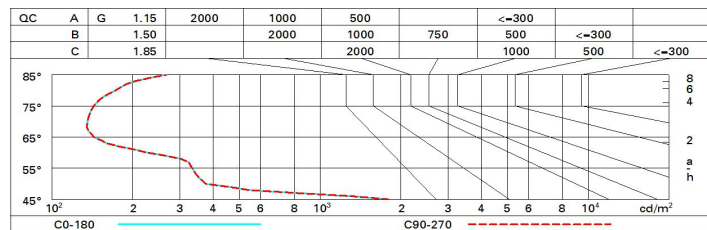

UGR diagram

Corrected UGR values (at 1100 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	10.2	10.7	10.4	17.0	17.2	10.2	10.7	10.4	17.0	17.2
	3H	10.0	10.6	10.3	10.8	17.1	10.0	10.6	10.3	10.8	17.1
	4H	10.0	10.4	10.3	10.7	17.0	10.0	10.4	10.3	10.7	17.0
	6H	15.9	10.3	10.2	10.6	17.0	15.9	10.3	10.2	10.6	17.0
	8H	15.8	10.3	10.2	10.6	10.9	15.8	10.3	10.2	10.6	10.9
	12H	15.8	10.2	10.2	10.6	10.9	15.8	10.2	10.2	10.6	10.9
4H	2H	10.0	10.4	10.3	10.7	17.0	10.0	10.4	10.3	10.7	17.0
	3H	15.8	10.2	10.2	10.6	10.9	15.8	10.2	10.2	10.6	10.9
	4H	15.7	10.1	10.1	10.4	10.8	15.7	10.1	10.1	10.4	10.8
	6H	15.6	15.9	10.1	10.3	10.8	15.6	15.9	10.1	10.3	10.8
	8H	15.6	15.9	10.0	10.3	10.7	15.6	15.9	10.0	10.3	10.7
	12H	15.5	15.8	10.0	10.2	10.7	15.5	15.8	10.0	10.2	10.7
8H	4H	15.6	15.9	10.0	10.3	10.7	15.6	15.9	10.0	10.3	10.7
	6H	15.5	15.7	10.0	10.2	10.6	15.5	15.7	10.0	10.2	10.6
	8H	15.4	15.6	15.9	10.1	10.6	15.4	15.6	15.9	10.1	10.6
	12H	15.4	15.6	15.9	10.0	10.6	15.4	15.6	15.9	10.0	10.6
12H	4H	15.5	15.8	10.0	10.2	10.7	15.5	15.8	10.0	10.2	10.7
	6H	15.4	15.6	15.9	10.1	10.6	15.4	15.6	15.9	10.1	10.6
	8H	15.4	15.6	15.9	10.0	10.6	15.4	15.6	15.9	10.0	10.6
Variations with the observer position at spacing:											
S =		1.0H	6.0 / -23.7				6.0 / -23.7				
		1.5H	8.8 / -24.6				8.8 / -24.6				
		2.0H	10.8 / -25.0				10.8 / -25.0				