


Last information update: September 2024

**Product configuration: P696**

P696: DALI dimmable spotlight - warm white flood optic

**Product code**P696: DALI dimmable spotlight - warm white flood optic **Attention! Code no longer in production****Technical description**

Adjustable spotlight with adapter for installation on DALI track for LED source with COB technology, Warm White (3000K) emission. Electronic control gear housed inside the track-mounted power supply box. The luminaire is made of die-cast aluminium and thermoplastic. OPTI BEAM superpure aluminium reflector with high luminous efficacy and uniform distribution, flood optic. Features 90° inclination on the horizontal plane and 360° rotation around the vertical axis, with mechanical locking device for aiming. Passive cooling system. Possibility of installing a refractor, to be ordered separately, for elliptical light beam distribution.

**Installation**

The luminaire can be installed on a DALI track or on an appropriate channel incorporating an electrified track.

**Colour**

White (01) | Black (04)

**Weight (Kg)**

1.82

**Mounting**

three circuit track|ceiling surface


**Wiring**

product inclusive of DALI components incorporated into the track-mounted box.


Complies with EN60598-1 and pertinent regulations

**Technical data**

|  |      |                                       |                                 |
|--|------|---------------------------------------|---------------------------------|
| Im system:   | 3945 | CRI:                                  | 80                              |
| W system:  | 36.2 | Colour temperature [K]:               | 3000                            |
| Im source:   | 5000 | MacAdam Step:                         | 2                               |
| W source:  | 33   | Life Time LED 1:                      | > 50,000h - L80 - B10 (Ta 25°C) |
| Luminous efficiency (lm/W, real value):            | 109  | Lamp code:                            | LED                             |
| Im in emergency mode:                              | -    | Number of lamps for optical assembly: | 1                               |
| Total light flux at or above an angle of 90° [Lm]: | 0    | ZVEI Code:                            | LED                             |
| Light Output Ratio (L.O.R.) [%]:                   | 79   | Number of optical assemblies:         | 1                               |
| Beam angle [°]:                                    | 38°  | Control:                              | DALI                            |

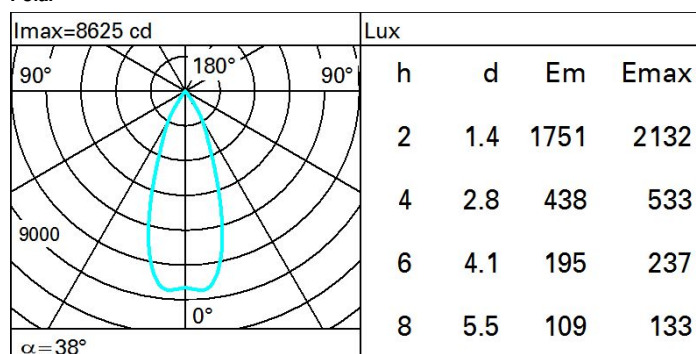**Polar**

### Isolux

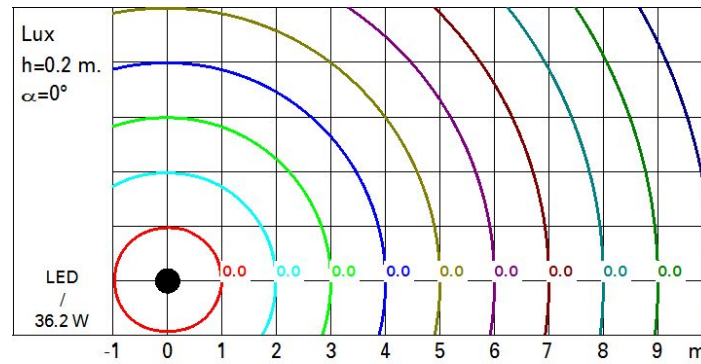

### UGR diagram

| Corrected UGR values (at 5000 lm bare lamp luminous flux) |     |                     |              |      |      |      |                   |      |      |      |      |      |
|---|-----|---------------------|--------------|------|------|------|-------------------|------|------|------|------|------|
| Riflect.:   |     | viewed<br>crosswise |              |      |      |      | viewed<br>endwise |      |      |      |      |      |
| ceiling/cav   |     |                     |              |      |      |      |                   |      |      |      |      |      |
| walls   |     | 0.70                | 0.70         | 0.50 | 0.50 | 0.30 | 0.70              | 0.70 | 0.50 | 0.50 | 0.30 | 0.30 |
| work pl.  |     | 0.50                | 0.30         | 0.50 | 0.30 | 0.30 | 0.50              | 0.30 | 0.50 | 0.30 | 0.30 | 0.30 |
| Room dim  |     | 0.20                | 0.20         | 0.20 | 0.20 | 0.20 | 0.20              | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 |
| x   | y   |                     |              |      |      |      |                   |      |      |      |      |      |
| 2H  | 2H  | 10.5                | 17.1         | 10.7 | 17.3 | 17.5 | 10.5              | 17.1 | 10.7 | 17.3 | 17.5 | 17.5 |
|   | 3H  | 10.3                | 16.9         | 10.6 | 17.1 | 17.4 | 10.3              | 16.9 | 10.6 | 17.1 | 17.4 | 17.4 |
|   | 4H  | 10.3                | 16.8         | 10.6 | 17.0 | 17.3 | 10.3              | 16.8 | 10.6 | 17.1 | 17.4 | 17.4 |
|   | 6H  | 10.2                | 16.6         | 10.5 | 17.0 | 17.3 | 10.2              | 16.6 | 10.5 | 17.0 | 17.3 | 17.3 |
|   | 8H  | 10.1                | 16.6         | 10.5 | 16.9 | 17.3 | 10.2              | 16.6 | 10.5 | 16.9 | 17.3 | 17.3 |
|   | 12H | 10.1                | 16.5         | 10.5 | 16.9 | 17.2 | 10.1              | 16.5 | 10.5 | 16.9 | 17.2 | 17.2 |
| 4H  | 2H  | 10.3                | 16.8         | 10.6 | 17.1 | 17.4 | 10.3              | 16.8 | 10.6 | 17.0 | 17.3 | 17.3 |
|   | 3H  | 10.1                | 16.5         | 10.5 | 16.9 | 17.2 | 10.1              | 16.5 | 10.5 | 16.9 | 17.2 | 17.2 |
|   | 4H  | 10.0                | 16.4         | 10.4 | 16.8 | 17.1 | 10.0              | 16.4 | 10.4 | 16.8 | 17.1 | 17.1 |
|   | 6H  | 15.9                | 16.3         | 16.4 | 16.7 | 17.1 | 15.9              | 16.3 | 16.4 | 16.7 | 17.1 | 17.1 |
|   | 8H  | 15.9                | 16.2         | 16.3 | 16.6 | 17.0 | 15.9              | 16.2 | 16.3 | 16.6 | 17.0 | 17.0 |
|   | 12H | 15.8                | 16.1         | 16.3 | 16.5 | 17.0 | 15.8              | 16.1 | 16.3 | 16.5 | 17.0 | 17.0 |
| 8H  | 4H  | 15.9                | 16.2         | 16.3 | 16.6 | 17.0 | 15.9              | 16.2 | 16.3 | 16.6 | 17.0 | 17.0 |
|   | 6H  | 15.8                | 16.0         | 16.3 | 16.5 | 17.0 | 15.8              | 16.0 | 16.3 | 16.5 | 17.0 | 17.0 |
|   | 8H  | 15.7                | 16.0         | 16.2 | 16.4 | 16.9 | 15.7              | 16.0 | 16.2 | 16.4 | 16.9 | 16.9 |
|   | 12H | 15.7                | 15.9         | 16.2 | 16.4 | 16.9 | 15.7              | 15.9 | 16.2 | 16.4 | 16.9 | 16.9 |
| 12H   | 4H  | 15.8                | 16.1         | 16.3 | 16.5 | 17.0 | 15.8              | 16.1 | 16.3 | 16.5 | 17.0 | 17.0 |
|   | 6H  | 15.7                | 16.0         | 16.2 | 16.4 | 16.9 | 15.7              | 16.0 | 16.2 | 16.4 | 16.9 | 16.9 |
|   | 8H  | 15.7                | 15.9         | 16.2 | 16.4 | 16.9 | 15.7              | 15.9 | 16.2 | 16.4 | 16.9 | 16.9 |
| Variations with the observer position at spacing:         |     |                     |              |      |      |      |                   |      |      |      |      |      |
| S =   |     | 1.0H                | 0.5 / -12.5  |      |      |      | 0.5 / -12.5       |      |      |      |      |      |
|   |     | 1.5H                | 9.3 / -17.3  |      |      |      | 9.3 / -17.3       |      |      |      |      |      |
|   |     | 2.0H                | 11.3 / -19.6 |      |      |      | 11.3 / -19.6      |      |      |      |      |      |