


Last information update: May 2024

Product configuration: 7133+1773

7133: Recessed luminaire 18W TC-L

**Product code**7133: Recessed luminaire 18W TC-L **Attention! Code no longer in production****Technical description**

Recessed wall luminaire for outdoor lighting. Die cast aluminium frame with anti-glare wings. Wiring compartment made of polycarbonate with polycarbonate protective cover and glass diffuser.

Installation

Recessed fixing into the wall with fischer screws. A polystyrene body moulding cover (code 0046) is placed in the formwork to either create the housing for the luminaire in the concrete or to finish the housing in the wall.

Colour

Black (04) | Grey (15)

Mounting

wall recessed

Wiring


Wiring contained in the body of the fitting: ballast and starter for compact fluorescent 18W lamps.

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	78	Colour temperature [K]:	2700
W system:	20	Voltage [Vin]:	230
Im source:	1200	Lamp code:	1773
W source:	18	Socket:	2G11
Luminous efficiency (Im/W, real value):	3.9	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	TC-L
Total light flux at or above an angle of 90° [Lm]:	1	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	7	Intervallo temperatura ambiente:	from -20°C to +35°C.
CRI:	85		

Polar

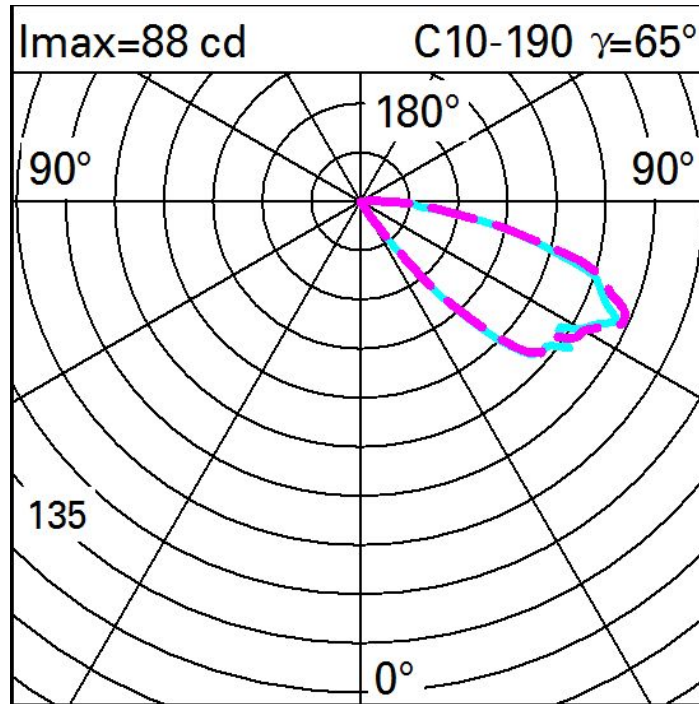

Illuminances

