


Last information update: February 2025

**Product configuration: RY24.01+RU58.38**

RY24.01: Surface/pendant-mounted corner module - Neutral White - Down - UGR<19 - LO - DALI - 8.5W 857.6lm - 4000K - CRI 90 - White

RU58.38: Single Microprismatic screen L=1200 (UGR) - Opaline

**Product code**

RY24.01: Surface/pendant-mounted corner module - Neutral White - Down - UGR<19 - LO - DALI - 8.5W 857.6lm - 4000K - CRI 90 - White

**Technical description**

Minimal surface/pendant-mounted corner element; including a Neutral White LED module in a Low Output (LO) version with UGR<19 controlled luminance ( $L \leq 3000 \text{cd/m}^2$ ) ideal for environments with video monitors. Integrated DALI dimmable power supply with pass-through wiring for continuous lines. The module optic and structural fittings allow high luminous flux and system efficiency values. Extruded aluminium heat sink and "Halogen Free" electric cables. Element with light not including a screen but compatible with both roll and single MPO screens.

**Installation**

Surface or pendant-mounted

**Colour**

White (01)

**Wiring**

Quick coupling terminal block connection to simplify connections between the subsequent modules. Complete with integrated dimmable DALI power supply.

Complies with EN60598-1 and pertinent regulations

**Accessory code**

RU58.38: Single Microprismatic screen L=1200 (UGR) - Opaline

**Technical description**

Flexible single Microprismatic screen for composition L=1200 - UGR< 19 optic -

**Installation**

snapped on via special springs located in the profile

**Colour**

Opaline (38)

**Notes**


TPa rated

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	858	Colour temperature [K]:	4000
W system:	8.5	MacAdam Step:	3
lm source:	670	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	3.5	Lamp code:	LED
Luminous efficiency (lm/W, real value):	100.9	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	2
Light Output Ratio (L.O.R.) [%]:	64	Control:	DALI-2
CRI (minimum):	90		


# Polar

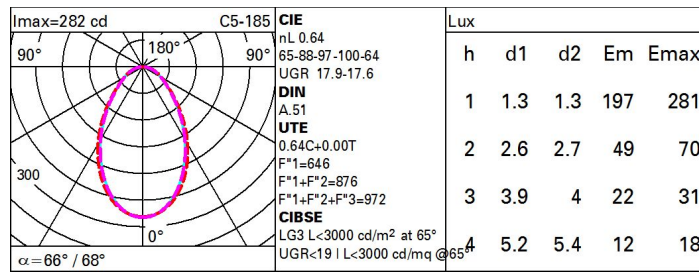

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	47	42	38	35	41	37	37	33	52
1.0	51	46	42	39	45	42	41	38	59
1.5	57	52	49	47	51	49	48	45	70
2.0	60	57	54	52	55	53	52	49	77
2.5	62	59	57	55	58	56	55	52	81
3.0	63	61	59	57	60	58	57	54	85
4.0	65	63	61	60	62	60	59	57	88
5.0	65	64	63	62	63	62	60	58	91

# Luminance curve limit

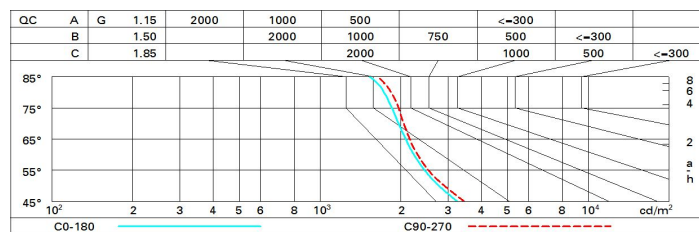

# UGR diagram

Corrected UGR values (at 670 lm bare lamp luminous flux)												
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise					
2H	2H	14.7	15.7	15.0	16.0	16.3	15.0	16.0	15.3	16.2	16.5	
	3H	15.9	16.8	16.2	17.1	17.4	15.2	16.1	15.6	16.4	16.7	
	4H	16.4	17.2	16.7	17.5	17.9	15.3	16.2	15.7	16.5	16.8	
	6H	16.8	17.6	17.2	17.9	18.2	15.4	16.1	15.7	16.5	16.8	
	8H	16.9	17.7	17.3	18.0	18.4	15.4	16.1	15.7	16.4	16.8	
	12H	17.0	17.8	17.4	18.1	18.5	15.3	16.0	15.7	16.4	16.8	
4H	2H	15.1	16.0	15.5	16.3	16.6	16.6	17.5	17.0	17.8	18.1	
	3H	16.5	17.2	16.9	17.6	17.9	17.1	17.9	17.5	18.2	18.6	
	4H	17.1	17.8	17.5	18.2	18.6	17.4	18.0	17.8	18.4	18.8	
	6H	17.7	18.3	18.1	18.7	19.1	17.5	18.1	18.0	18.5	18.9	
	8H	17.9	18.4	18.4	18.8	19.3	17.6	18.1	18.0	18.5	19.0	
	12H	18.1	18.5	18.5	19.0	19.4	17.6	18.1	18.1	18.5	19.0	
8H	4H	17.4	17.9	17.8	18.3	18.8	18.2	18.7	18.6	19.1	19.6	
	6H	18.1	18.5	18.6	19.0	19.5	18.5	18.9	19.0	19.4	19.9	
	8H	18.4	18.8	18.9	19.2	19.7	18.6	19.0	19.1	19.5	20.0	
	12H	18.6	19.0	19.1	19.4	20.0	18.8	19.1	19.3	19.6	20.1	
12H	4H	17.4	17.9	17.9	18.3	18.8	18.3	18.8	18.8	19.2	19.7	
	6H	18.2	18.5	18.7	19.0	19.5	18.7	19.1	19.2	19.6	20.1	
	8H	18.5	18.8	19.0	19.3	19.8	18.9	19.2	19.4	19.7	20.2	
Variations with the observer position at spacing:												
S =		1.0H	0.2 / -0.3		0.2 / -0.3							
		1.5H	0.3 / -0.6		0.3 / -0.6							
		2.0H	0.7 / -0.7		0.8 / -0.7							