

Product configuration: ET42

ET42: Spotlight with bracket - Tunable White - Integrated control card - Remote power supply - Wall Washer optic - Ta 25°




ET42: Spotlight with bracket - Tunable White - Integrated control card - Remote power supply - Wall Washer optic - Ta 25°

Spotlight designed to use (White 2200K, 3000K, 4000K) LED lamps, a Wall Washer optic and a DMX512-RDM control. Consists of a die-cast aluminium optical assembly, bracket and box for the power supply with a clear tempered sodium-calcium safety glass cover. The luminaire is fitted with a double cable gland for pass-through wiring. The optical assembly can be adjusted on a horizontal plane at an angle between -50° / +90°. Agora is fitted with a graduated scale and mechanical locking device for positioning. The optical system is Opti Beam Lens. The power supply is remote whereas the DMX control card is integrated in the product. Both indoor (diffuser glass covers, lamellar louvers and refractors for elliptical light) and outdoor accessories (cylindrical screens, visors and protective grilles) can be used. All external screws used are made of A2 stainless steel.

Floor, ceiling or wall-mounted installation.

Colour	Weight (Kg)
White (01) Black (04) Grey (15) Rust Brown (F5)	9.35




Double PG.

Complies with EN60598-1 and pertinent regulations



Im system:	7020	MacAdam Step:	3
W system:	86.6	Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)
Im source:	11700	Voltage [Vin]:	48
W source:	79	Lamp code:	LED
Luminous efficiency (lm/W, 81.1 real value):		Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	60	Intervallo temperatura ambiente:	from -30°C to 35°C.
CRI (minimum):	80	Control:	DMX-RDM
Colour temperature [K]:	Tunable white 2200 - 4000		

Polar

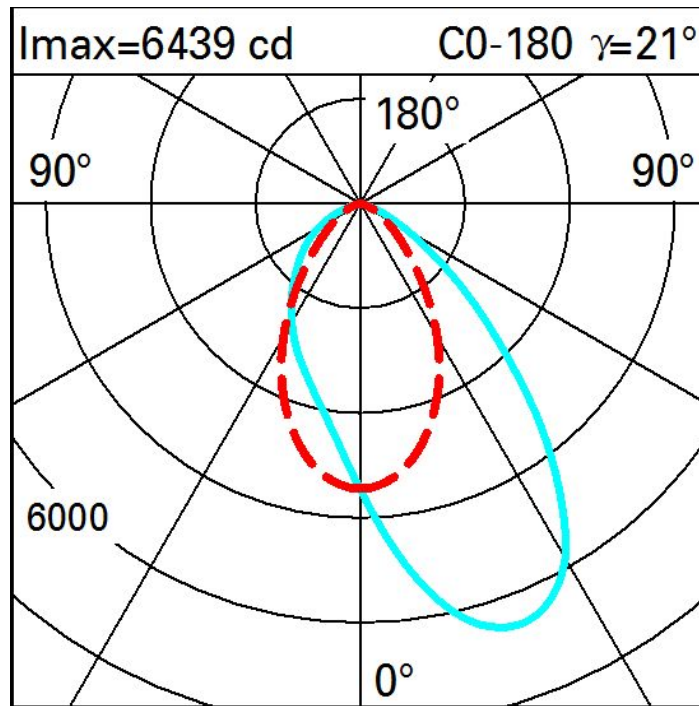

Illuminances

Lux												Wall distance = 1 m											
3																							
	0.5	2	9	42	165	311	165	42	9	2	0.5												
2	5	15	46	161	535	933	535	161	46	15	5												
	11	29	80	246	616	908	616	246	80	29	11												
1	17	39	96	238	460	589	460	238	96	39	17												
	21	46	98	189	295	348	295	189	98	46	21												
0																							
	m	-2	-1	0	1	2	3																