

Palco Recessed / Surface

Last information update: February 2025

Product configuration: QC41.01
QC41.01: Palco single surface Ø37 - flood - remote driver - 8.1W 468lm - 3000K - CRI 90 - White



Product code
QC41.01: Palco single surface Ø37 - flood - remote driver - 8.1W 468lm - 3000K - CRI 90 - White

Technical description
Miniaturised adjustable spotlight for surface installation. Spotlight body with a die-cast aluminium dissipation system - cast zamak rotation unit - shaped steel fixing plate - thermoplastic surface cover base with stainless steel locking mechanism. The swivel joints allow the spotlight to be rotated by 360° and tilted by 90°. The set back position of the optic unit guarantees a high level of visual comfort with a thermoplastic high definition lens. Ballast not included, available with separate code.

Installation
Installation surface plate fastening - spotlight unit attached to cover base with a locking mechanism.

Colour	Weight (Kg)
White (01)	0.11

Mounting
wall surface|ceiling surface


Wiring
Output cables for connecting to power supply line.

Notes
Technical and anti-glare accessories available.

Complies with EN60598-1 and pertinent regulations




Technical data			
Im system:	468	CRI (minimum):	90
W system:	8.1	Colour temperature [K]:	3000
Im source:	780	MacAdam Step:	2
W source:	8.1	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	57.8	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	60	Number of optical assemblies:	1
Beam angle [°]:	45°	LED current [mA]:	650

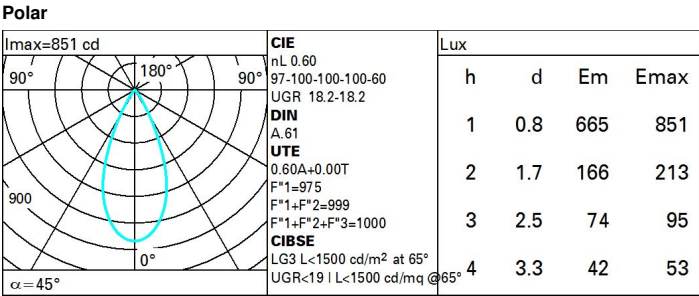

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	54	51	49	47	50	48	48	46	77
1.0	56	53	51	50	53	51	51	49	81
1.5	59	57	55	54	56	55	54	53	88
2.0	61	59	58	57	59	58	57	55	92
2.5	62	61	60	59	60	59	59	57	95
3.0	63	62	61	61	61	61	60	58	97
4.0	64	63	63	62	62	62	61	59	99
5.0	64	64	63	63	63	62	61	60	100

Luminance curve limit

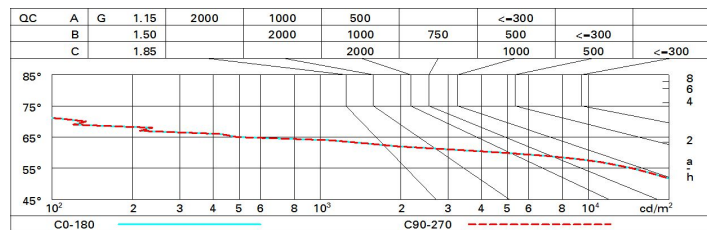

UGR diagram

Corrected UGR values (at 780 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	18.8	19.4	19.1	19.6	19.9	18.8	19.4	19.1	19.6	19.9
	3H	18.6	19.2	18.9	19.5	19.8	18.7	19.2	19.0	19.5	19.8
	4H	18.6	19.1	18.9	19.4	19.7	18.6	19.1	18.9	19.4	19.7
	6H	18.5	19.0	18.8	19.3	19.6	18.5	19.0	18.8	19.3	19.6
	8H	18.4	18.9	18.8	19.2	19.6	18.5	18.9	18.8	19.3	19.6
	12H	18.4	18.9	18.8	19.2	19.5	18.4	18.9	18.8	19.2	19.6
4H	2H	18.6	19.1	18.9	19.4	19.7	18.6	19.1	18.9	19.4	19.7
	3H	18.4	18.9	18.8	19.2	19.6	18.4	18.9	18.8	19.2	19.6
	4H	18.3	18.7	18.7	19.1	19.5	18.3	18.7	18.7	19.1	19.5
	6H	18.2	18.6	18.7	19.0	19.4	18.2	18.6	18.7	19.0	19.4
	8H	18.2	18.5	18.6	18.9	19.4	18.2	18.5	18.6	18.9	19.4
	12H	18.2	18.4	18.6	18.9	19.3	18.2	18.4	18.6	18.9	19.3
8H	4H	18.2	18.5	18.6	18.9	19.4	18.2	18.5	18.6	18.9	19.4
	6H	18.1	18.4	18.6	18.8	19.3	18.1	18.4	18.6	18.8	19.3
	8H	18.1	18.3	18.5	18.7	19.2	18.1	18.3	18.5	18.7	19.2
	12H	18.0	18.2	18.5	18.7	19.2	18.0	18.2	18.5	18.7	19.2
12H	4H	18.2	18.4	18.6	18.9	19.3	18.2	18.4	18.6	18.9	19.3
	6H	18.1	18.3	18.5	18.7	19.2	18.1	18.3	18.5	18.7	19.2
	8H	18.0	18.2	18.5	18.7	19.2	18.0	18.2	18.5	18.7	19.2
Variations with the observer position at spacing:											
S =	1.0H	5.2 / -8.8					5.2 / -8.8				
	1.5H	8.0 / -22.1					8.0 / -22.1				
	2.0H	10.0 / -34.7					10.0 / -34.7				