



Last information update: February 2025

Product configuration: QG36

QG36: Ø 225 mm - warm white - DALI

**Product code**

QG36: Ø 225 mm - warm white - DALI

Technical description

Round fixed luminaire designed to use LED lamps with C.o.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Dissipater made of painted grey die-cast aluminium. Product complete with LED lamp in warm white colour tone (3000K). Wall-washer light emission.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 20 mm.

Colour

White / Aluminium (39)

Weight (Kg)

1.03

Mounting

ceiling surface

Wiring


product complete with DALI components

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	2573	Colour temperature [K]:	3000
W system:	25.3	MacAdam Step:	2
lm source:	3100	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	22	Lamp code:	LED
Luminous efficiency (lm/W, real value):	101.7	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	83	Control:	DALI-2
CRI (minimum):	90		

Polar

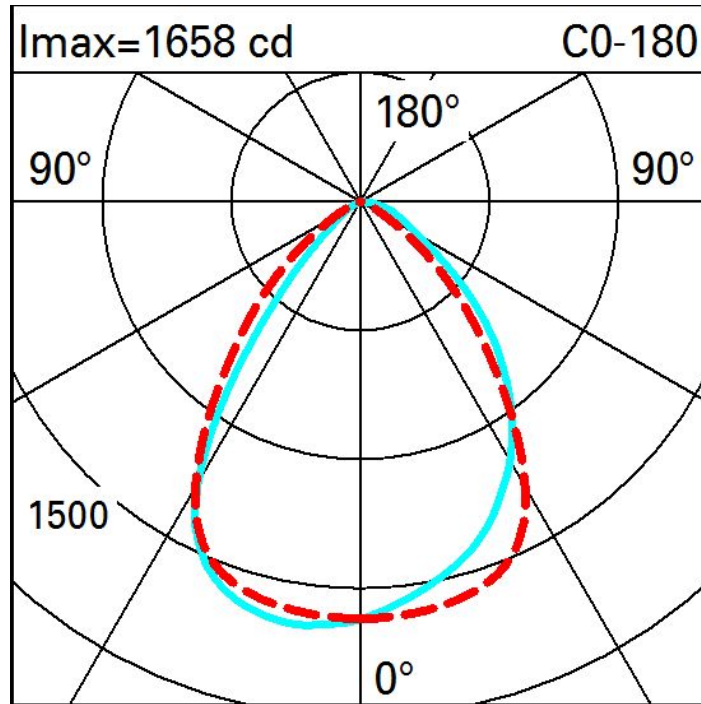

Illuminances

Lux		Wall distance = 1m										
3												
		1.0	3	8	24	83	136	83	24	8	3	1.0
2		2	5	16	58	163	243	163	58	16	5	2
		4	11	34	83	151	188	151	83	34	11	4
1		8	18	38	69	102	117	102	69	38	18	8
		10	20	34	51	66	73	66	51	34	20	10
0												
	m	-2	-1	0	1	2	3					