


Last information update: May 2024

Product configuration: P041

P041: spotlight - warm white 50° optic

**Product code**P041: spotlight - warm white 50° optic **Attention! Code no longer in production****Technical description**

Adjustable spotlight with adapter for installation on a mains voltage track. Die-cast aluminium optical assembly and brackets, the back of the product is slightly rounded and made of a thermoplastic material. Spotlight double adjustability allows a 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. Mechanical aiming locks both for rotation about the vertical axis and tilting relative to the horizontal plane. Equipped with electronic ballast. Luminaire complete with C.O.B. technology LED unit in warm white colour 3000K CRI90. Option of installing a flat accessory that can be either an elliptical distribution refractor, a soft lens filter or a louver.

Installation

on an electrified track or special base

Colour

White (01) | Black (04) | White / Chrome (E4)

Weight (Kg)

0.95

Mounting

three circuit track

Wiring

product complete with electronic components

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	1420.7	CRI:	90
W system:	15.4	Colour temperature [K]:	3000
lm source:	1800	MacAdam Step:	2
W source:	13	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	92.3	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	79	Number of optical assemblies:	1
Beam angle [°]:	56°		


Polar

Imax=1826 cd		CIE		Lux			
90°	180°	90°		h	d	Em	Emax
nL 0.79 98-100-100-100-79 UGR 17.1-17.1 DIN A.61 UTE 0.79A+0.00T F*1=975 F*1+F*2=997 F*1+F*2+F*3=1000 CIBSE BZ1				2	2.1	362	453
				4	4.3	91	113
				6	6.4	40	50
				8	8.5	23	28

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	70	67	64	62	66	63	63	61	77
1.0	74	70	68	66	69	67	67	64	81
1.5	78	75	73	71	74	72	72	69	88
2.0	80	78	77	75	77	76	75	73	92
2.5	82	80	79	78	79	78	77	75	95
3.0	83	82	81	80	80	80	79	77	97
4.0	84	83	82	82	82	81	80	78	99
5.0	84	84	83	83	82	82	81	79	100

Luminance curve limit

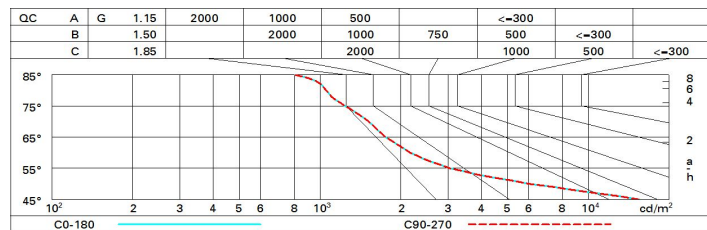

UGR diagram

Corrected UGR values (at 1800 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	17.6	18.2	17.9	18.4	18.7	17.6	18.2	17.9	18.4	18.7
	3H	17.5	18.0	17.8	18.3	18.6	17.5	18.0	17.8	18.3	18.6
	4H	17.4	17.9	17.7	18.2	18.5	17.4	17.9	17.7	18.2	18.5
	6H	17.3	17.8	17.7	18.1	18.5	17.3	17.8	17.7	18.1	18.4
	8H	17.3	17.8	17.7	18.1	18.4	17.3	17.7	17.7	18.1	18.4
	12H	17.3	17.7	17.6	18.0	18.4	17.3	17.7	17.6	18.0	18.4
4H	2H	17.4	17.9	17.7	18.2	18.5	17.4	17.9	17.7	18.2	18.5
	3H	17.3	17.7	17.6	18.0	18.4	17.3	17.7	17.7	18.0	18.4
	4H	17.2	17.6	17.6	17.9	18.3	17.2	17.6	17.6	17.9	18.3
	6H	17.1	17.4	17.5	17.8	18.3	17.1	17.4	17.5	17.8	18.3
	8H	17.1	17.4	17.5	17.8	18.2	17.1	17.4	17.5	17.8	18.2
	12H	17.0	17.3	17.5	17.7	18.2	17.0	17.3	17.5	17.7	18.2
8H	4H	17.1	17.4	17.5	17.8	18.2	17.1	17.4	17.5	17.8	18.2
	6H	17.0	17.2	17.5	17.7	18.2	17.0	17.2	17.5	17.7	18.2
	8H	16.9	17.1	17.4	17.6	18.1	16.9	17.1	17.4	17.6	18.1
	12H	16.9	17.1	17.4	17.6	18.1	16.9	17.1	17.4	17.6	18.1
12H	4H	17.0	17.3	17.5	17.7	18.2	17.0	17.3	17.5	17.7	18.2
	6H	16.9	17.1	17.4	17.6	18.1	16.9	17.1	17.4	17.6	18.1
	8H	16.9	17.1	17.4	17.6	18.1	16.9	17.1	17.4	17.6	18.1
Variations with the observer position at spacing:											
S =	1.0H	5.6 / -11.9					5.6 / -11.9				
	1.5H	8.4 / -13.1					8.4 / -13.1				
	2.0H	10.4 / -13.6					10.4 / -13.6				