

## Deep Frame



Design iGuzzini

iGuzzini

Last information update: June 2023

### Product configuration: P895

P895: Deep Frame - 1 element - CoB warm LED - medium beam



### Product code

P895: Deep Frame - 1 element - CoB warm LED - medium beam **Attention! Code no longer in production**

### Technical description

Individual recessed luminaire for LED lamp. Version with a perimeter frame. Shaped sheet steel structural frame. Die-cast aluminium, twin swivel universal joint located in a position set back from the installation surface to guarantee a high level of visual comfort. Tilts  $\pm 30^\circ$  around both the horizontal and vertical axes. Die-cast aluminium lighting body designed to optimise heat dispersal. High efficiency aluminium reflector - medium angle. High color rendering index, warm white LED lamp. Glass cover The installation system is toolfree. Control gear unit included.

### Installation

Recessed in 1 to 30 mm thick false ceilings. Steel wire fixing springs. Preparation hole 102 x 102.

### Colour

White (01) | Grey / Black (74)

### Mounting

ceiling recessed

### Wiring

Complete with electronic control gear unit connected to the luminaire. Wiring for connecting to mains network on driver terminal board.

### Notes

Accessories available: refractor for elliptical flow distribution - interchangeable reflectors.

Complies with EN60598-1 and pertinent regulations



### Technical data

Im system:	665	CRI (minimum):	90
W system:	10.1	Colour temperature [K]:	3000
Im source:	950	MacAdam Step:	3
W source:	8.4	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	65.8	Ballast losses [W]:	1.7
Im in emergency mode:	-	Lamp code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of lamps for optical assembly:	1
Light Output Ratio (L.O.R.) [%]:	70	ZVEI Code:	LED
Beam angle [°]:	26°	Number of optical assemblies:	1


### Polar

 $I_{max}=2705\text{ cd}$ $\alpha=26^\circ$	<b>CIE</b> nL 0.70 99-100-100-100-70 UGR <10-<10 <b>DIN</b> A.61 <b>UTE</b> 0.70A+0.00T F*1=993 F*1+F*2=999 F*1+F*2+F*3=1000 <b>CIBSE</b> LG3 L<1500 cd/m <sup>2</sup> at 65° UGR<10   L<1500 cd/mq @ 65°			
	<b>Lux</b>			
	h	d	Em	Emax
	2	0.9	556	676
	4	1.8	139	169
	6	2.8	62	75
	8	3.7	35	42

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	63	60	58	56	59	57	57	55	78
1.0	66	63	61	59	62	60	60	58	83
1.5	69	67	65	64	66	65	64	62	88
2.0	71	70	68	67	69	68	67	65	93
2.5	73	71	70	70	70	70	69	67	96
3.0	73	73	72	71	72	71	70	68	98
4.0	74	74	73	73	73	72	71	69	99
5.0	75	74	74	74	73	73	72	70	100

# Luminance curve limit

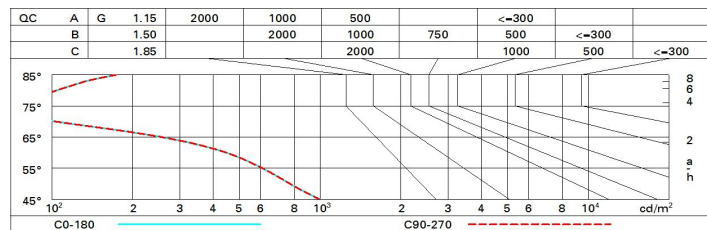

# UGR diagram

Corrected UGR values (at 950 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	-1.7	0.5	-1.3	0.8	1.2	-1.7	0.5	-1.3	0.8	1.2
	3H	-1.7	-0.0	-1.3	0.3	0.6	-1.7	0.0	-1.3	0.4	0.7
	4H	-1.8	-0.4	-1.4	-0.0	0.3	-1.7	-0.3	-1.3	0.0	0.4
	6H	-1.8	-0.7	-1.4	-0.4	-0.0	-1.7	-0.6	-1.3	-0.3	0.0
	8H	-1.8	-0.7	-1.4	-0.4	-0.0	-1.8	-0.7	-1.4	-0.4	0.0
	12H	-1.8	-0.8	-1.4	-0.4	-0.0	-1.8	-0.8	-1.4	-0.4	-0.0
4H	2H	-1.7	-0.3	-1.3	0.0	0.4	-1.8	-0.4	-1.4	-0.0	0.3
	3H	-1.7	-0.7	-1.3	-0.3	0.1	-1.7	-0.7	-1.3	-0.3	0.1
	4H	-1.8	-0.8	-1.4	-0.4	-0.0	-1.8	-0.8	-1.4	-0.4	-0.0
	6H	-2.1	-0.4	-1.6	0.0	0.5	-2.1	-0.4	-1.7	-0.0	0.5
	8H	-2.2	-0.3	-1.7	0.1	0.6	-2.3	-0.4	-1.8	0.1	0.6
	12H	-2.3	-0.3	-1.8	0.2	0.7	-2.4	-0.4	-1.9	0.1	0.6
8H	4H	-2.3	-0.4	-1.8	0.1	0.6	-2.2	-0.3	-1.7	0.1	0.6
	6H	-2.3	-0.5	-1.8	-0.0	0.5	-2.3	-0.5	-1.8	-0.0	0.5
	8H	-2.3	-0.7	-1.8	-0.2	0.3	-2.3	-0.7	-1.8	-0.2	0.3
	12H	-2.1	-1.0	-1.6	-0.5	-0.0	-2.1	-1.1	-1.6	-0.6	-0.1
12H	4H	-2.4	-0.4	-1.9	0.1	0.6	-2.3	-0.3	-1.8	0.2	0.7
	6H	-2.4	-0.7	-1.8	-0.2	0.3	-2.3	-0.6	-1.8	-0.1	0.4
	8H	-2.1	-1.1	-1.6	-0.6	-0.1	-2.1	-1.0	-1.6	-0.5	-0.0
Variations with the observer position at spacing:											
S =		1.0H				3.9 / -2.7				3.9 / -2.7	
		1.5H				6.3 / -4.6				6.3 / -4.6	
		2.0H				8.2 / -7.3				8.2 / -7.3	