


Last information update: May 2025

Product configuration: S743.15+X586.15

S743.15: Pole-mounted system - STZI optic - Neutral White - integrated DALI - Ø 42-76mm - 29.7W 4410lm - 4000K - Grey
X586.15: Adapter required for installation on pole - To be ordered together with optic assembly - from Ø42 to Ø60mm - Grey



Product code

S743.15: Pole-mounted system - STZI optic - Neutral White - integrated DALI - Ø 42-76mm - 29.7W 4410lm - 4000K - Grey

Technical description

Outdoor luminaire with direct light street optic. The optical assembly and the pole attachment system are made of EN1706AC 46100LF aluminium alloy and subjected to a multi-step, pre-treatment process, in which the main phases are: degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The painting stage consists of a primer and a textured acrylic paint, cured at 150 °C, with a high level of weather and UV ray resistance. Option of adjusting the inclination in relation to the road surface by +20°/0° (in 5° steps) for a pole-top installation and +5°/-20° (in 5° steps) for a lateral installation. 5 mm thick extra-clear sodium-calcium closure glass fastened to the product with 4 captive screws. The high IP rating is guaranteed by the silicone gasket placed between the two elements. Complete with circuit featuring monochrome LEDs and polymer optic lenses. Product pre-wired with outlet cable. The IP68 connector can be purchased separately as an accessory. The wiring and optical compartment can be opened with everyday tools (no retention cables) or tool-free devices. The luminous flux emitted in the upper hemisphere of the system in the horizontal position is null (in conformity with the strictest standards for the prevention of light pollution). All external screws are made of stainless steel.

Installation

The spotlight can be installed with a pole-top or lateral mounting.

Colour

Grey (15)

Weight (Kg)

3.32

Mounting

wall arm|pole-top

Wiring

Connection to be made with an IP68 connector, which can be purchased separately.

Notes

In the event of installations on insulated supports (like fibreglass poles) contact your iGuzzini dealer or customer care service to ask for a customised product fitted with an accessory for protecting the luminaire from eventual faults due to electrostatic charges.

Complies with EN60598-1 and pertinent regulations



Accessory code

X586.15: Adapter required for installation on pole - To be ordered together with optic assembly - from Ø42 to Ø60mm - Grey

Technical description

Liquid painted die-cast accessory required for both pole-mounted (+20°/0°) and lateral (+5/20°) installation. The screws used are made of stainless steel.


Colour

Grey (15)

Weight (Kg)

0.68


Complies with EN60598-1 and pertinent regulations




Technical data

| | | | |
|--|--------------------------------|--|--|
| Im system: | 4410 | Voltage [Vin]: | 230 |
| W system: | 29.7 | Lamp code: | LED |
| Im source: | - | Number of lamps for optical assembly: | 1 |
| W source: | - | ZVEI Code: | LED |
| Luminous efficiency (Im/W, real value): | 148.5 | Number of optical assemblies: | 1 |
| Im in emergency mode: | - | Intervall temperatura ambiente: | from -40°C to 50°C. |
| Total light flux at or above an angle of 90° [Lm]: | 0 | Power factor: | See installation instructions |
| Light Output Ratio (L.O.R.) [%]: | 100 | Inrush current: | 24.88 A / - μ s |
| CRI (minimum): | 70 | Maximum number of luminaires of this type per miniature circuit breaker: | B10A: 12 luminaires B16A: 20 luminaires C10A: 20 luminaires C16A: 34 luminaires |
| Colour temperature [K]: | 4000 | Minimum dimming %: | 5 |
| MacAdam Step: | 3 | Overvoltage protection: | 10kV Common mode & 6kV Differential mode |
| Life Time LED 1: | 100,000h - L90 - B10 (Ta 25°C) | Control: | Midnight preset/DALI NFC |
| Life Time LED 2: | 100,000h - L90 - B10 (Ta 40°C) | | |

Polar

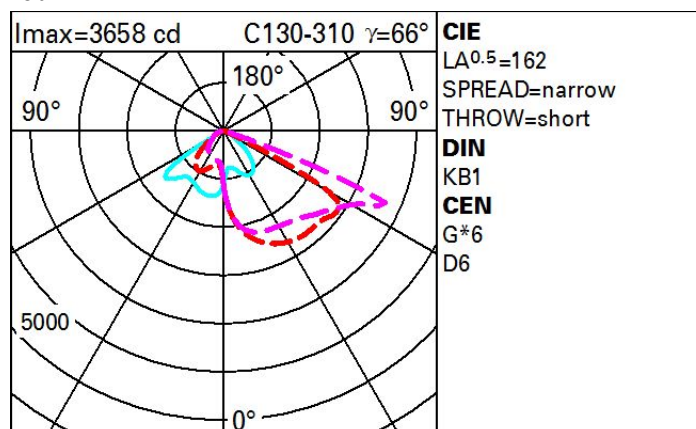

Isolux

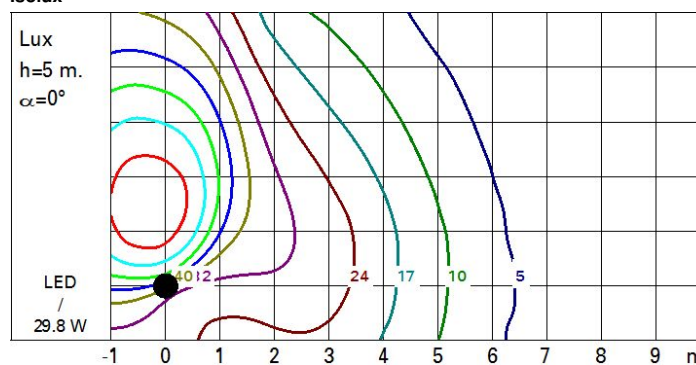

Utilisation factors

