

## Front Light

Design iGuzzini

iGuzzini

Last information update: May 2024

### Product configuration: N289

N289: Warm White - Flood Optic



### Product code

N289: Warm White - Flood Optic **Attention! Code no longer in production**

### Technical description

Adjustable spotlight with adapter for installation on a mains voltage track. Luminaire made of die-cast aluminium. Spotlight double adjustability allows a 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. Mechanical aiming locks both for rotation about the vertical axis and tilting relative to the horizontal plane. Equipped with electronic ballast. Luminaire complete with LED unit, C.O.B. technology, and flood optic with warm white colour 3000K.

### Installation

On an electrified track

### Colour

White (01) | Black (04) | Grey / Black (74)

### Weight (Kg)

0.95


### Mounting

three circuit track

### Wiring

product complete with electronic components


Complies with EN60598-1 and pertinent regulations




### Technical data

lm system:	1676	CRI:	80
W system:	15.4	Colour temperature [K]:	3000
lm source:	2100	MacAdam Step:	2
W source:	14	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	108.9	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	80	Number of optical assemblies:	1
Beam angle [°]:	32°		

### Polar

Imax=5165 cd		Lux			
90°	180°	h	d	Em	Emax
		2	1.1	1020	1291
		4	2.3	255	323
		6	3.4	113	143
		8	4.6	64	81
α=32°					

### Isolux

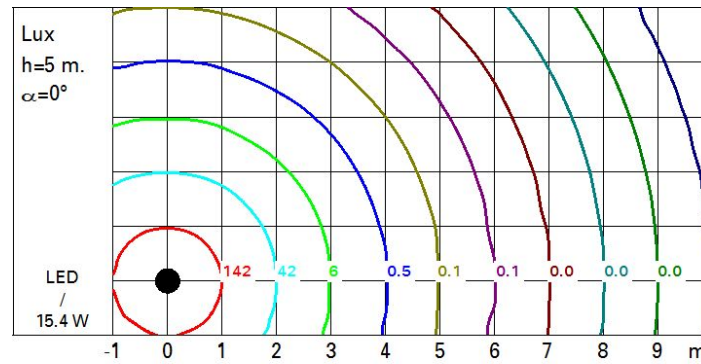

### UGR diagram

Corrected UGR values (at 2100 lm bare lamp luminous flux)											
Reflect.:											
ceiling		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	7.5	8.1	7.8	8.3	8.5	7.5	8.1	7.8	8.3	8.5
	3H	7.5	8.0	7.8	8.3	8.5	7.4	7.9	7.7	8.2	8.5
	4H	7.5	7.9	7.8	8.2	8.5	7.4	7.8	7.7	8.1	8.4
	6H	7.4	7.9	7.8	8.2	8.5	7.3	7.7	7.7	8.0	8.4
	8H	7.4	7.8	7.8	8.1	8.5	7.3	7.7	7.6	8.0	8.3
	12H	7.4	7.8	7.7	8.1	8.4	7.2	7.6	7.6	8.0	8.3
4H	2H	7.4	7.8	7.7	8.1	8.4	7.5	7.9	7.8	8.2	8.5
	3H	7.4	7.8	7.8	8.1	8.5	7.4	7.8	7.8	8.1	8.5
	4H	7.4	7.7	7.8	8.1	8.5	7.4	7.7	7.8	8.1	8.5
	6H	7.3	7.6	7.8	8.0	8.5	7.3	7.6	7.7	8.0	8.4
	8H	7.3	7.6	7.7	8.0	8.4	7.3	7.6	7.7	8.0	8.4
	12H	7.3	7.5	7.7	7.9	8.4	7.2	7.5	7.7	7.9	8.4
8H	4H	7.3	7.6	7.7	8.0	8.4	7.3	7.6	7.7	8.0	8.4
	6H	7.3	7.5	7.7	7.9	8.4	7.3	7.5	7.7	7.9	8.4
	8H	7.2	7.4	7.7	7.9	8.4	7.2	7.4	7.7	7.9	8.4
	12H	7.2	7.4	7.7	7.8	8.4	7.2	7.4	7.7	7.8	8.4
12H	4H	7.2	7.5	7.7	7.9	8.4	7.3	7.5	7.7	7.9	8.4
	6H	7.2	7.4	7.7	7.9	8.4	7.2	7.4	7.7	7.9	8.4
	8H	7.2	7.4	7.7	7.8	8.4	7.2	7.4	7.7	7.8	8.4
Variations with the observer position at spacing:											
S =		1.0H	5.7 / -5.7				5.7 / -5.7				
		1.5H	8.4 / -6.5				8.4 / -6.5				
		2.0H	10.4 / -6.9				10.4 / -6.9				