
Last information update: October 2024

Product configuration: EP55

EP55: Spotlight with bracket - Warm White LED - On/Off - Very Wide Flood optic



140



Product code

EP55: Spotlight with bracket - Warm White LED - On/Off - Very Wide Flood optic

Technical description

Floodlight designed to use Warm White LED lamps with a Very Wide Flood optic. Can be installed at ground level, on walls (using screw anchors) and on pole mounting systems. The luminaire consists of an optical assembly/component-holding box and hidden fixing bracket. The optical assembly and front frame are made of die-cast aluminium alloy painted with a smooth finish (grey RAL 9007) or a textured finish (white RAL 9016). The painting process includes a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The next painting stage consists of a primer and a liquid acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. The tempered sodium-calcium glass cover has customised serigraphy, is 5mm thick, and joined to the frame with silicone. The frame is fastened to the optical assembly by captive M5 AISI 304 stainless steel screws and a galvanised steel safety cable. The product includes a Warm White monochrome LED circuit and an Opti Beam Reflector technology optic. The component-holding box, in the rear of the luminaire, is set up to hold the control gear, which is fixed with captive screws on a galvanised steel pull-out plate. The control gear can be accessed through the rear door made of painted aluminium alloy, fixed to the product body with four M5 AISI 304 stainless steel captive screws and a safety cable. iPro can be adjusted +95°/ -5° relative to the horizontal line using a bracket made of extruded aluminium, on which a graduated scale (with 15° steps) is marked using serigraphy. The internal silicone seals guarantee watertightness IP66h Set up for pass-through wiring using a double M24x1.5 nickel-plated brass cable gland (suitable for cables with 7÷16mm diameter). All external screws used are made of A2 stainless steel. The luminaire technical characteristics conform to EN60598-1 standards and particular requirements.

Installation

Ground, wall or ceiling installation using special bracket. Secure using screw anchors for concrete, cement and solid brick.

Colour Weight (Kg) White (01) | Black (04) | Grey (15) | Rust Brown (F5)

Mounting

wall armiground surfacelwall surfacelground anchored ground spikelceiling surfacelu-bracket

Wiring

Luminaire fitted with On/Off control gear.

Notes

Overvoltage protection: 3KV Common Mode and 2KV Differential Mode (we recommend using the JAL6 item code).

Complies with EN60598-1 and pertinent regulations 8 C€















On/off






1398 Life Time LED 2: 100,000h - L90 - B10 (Ta 40°C) Im system: Voltage [Vin]: W system: 13.9 1840 Lamp code: LED Im source: W source: 12 Number of lamps for optical Luminous efficiency (lm/W, 100.6 assembly: LED real value): **ZVEI Code** Im in emergency mode: Number of optical assemblies Total light flux at or above an angle of 90° [Lm]: Intervallo temperatura from -25°C to 50°C. ambiente: Light Output Ratio (L.O.R.) 76 Power factor: See installation instructions [%]: 81° / 80° Inrush current: Beam angle [°]: 5 A / 50 us CRI (minimum): Maximum number of 80 luminaires of this type per B10A: 31 luminaires Colour temperature [K] 3000 miniature circuit breaker: B16A: 50 luminaires MacAdam Step: C10A: 52 luminaires Life Time LED 1: 100,000h - L90 - B10 (Ta 25°C) C16A: 85 luminaires Overvoltage protection: 4kV Common mode & 2kV Differential mode

Control:

Polar

Imax=979 cd C90-270 γ=16°	Lux				
90°	h	d1	d2	Em	Emax
	2	3.5	3.5	172	224
	4	6.9	7	43	56
1050	6	10.4	10.4	19	25
α=82°	8	13.8	13.9	11	14

Isolux

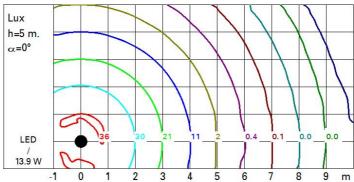

UGR diagram

Rifled	ct.:											
ceil/cav walls work pl. Room dim		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	
		0.50	0.30 0.20	0.50	0.30	0.30	0.50 0.20	0.30	0.50	0.30 0.20	0.30	
												viewed
		X	У	crosswise					endwise			
2H	2H	21.5	22.1	21.8	22.4	22.6	21.5	22.2	21.8	22.4	22.6	
	ЗН	21.4	21.9	21.7	22.2	22.5	21.4	22.0	21.7	22.2	22.5	
	4H	21.3	21.8	21.6	22.1	22.4	21.3	21.8	21.7	22.1	22.4	
	бН	21.2	21.7	21.6	22.0	22.4	21.2	21.7	21.6	22.0	22.4	
	нв	21.2	21.7	21.6	22.0	22.3	21.2	21.7	21.6	22.0	22.3	
	12H	21.2	21.6	21.5	21.9	22.3	21.2	21.6	21.5	21.9	22.3	
4H	2H	21.3	21.8	21.6	22.1	22.4	21.3	21.8	21.7	22.1	22.4	
	ЗН	21.2	21.6	21.5	21.9	22.3	21.2	21.6	21.5	21.9	22.3	
	4H	21.1	21.5	21.5	21.8	22.2	21.1	21.5	21.5	21.8	22.2	
	6H	21.0	21.3	21.4	21.7	22.1	21.0	21.3	21.4	21.7	22.1	
	HS	20.9	21.2	21.4	21.7	22.1	20.9	21.3	21.4	21.7	22.1	
	12H	20.9	21.2	21.3	21.6	22.1	20.9	21.2	21.4	21.6	22.1	
вн	4H	20.9	21.2	21.4	21.7	22.1	20.9	21.3	21.4	21.7	22.1	
	6H	20.8	21.1	21.3	21.5	22.0	20.9	21.1	21.3	21.6	22.0	
	HS	8.02	21.0	21.3	21.5	22.0	20.8	21.0	21.3	21.5	22.0	
	12H	20.7	20.9	21.2	21.4	21.9	20.7	20.9	21.2	21.4	21.9	
12H	4H	20.9	21.2	21.3	21.6	22.1	20.9	21.2	21.4	21.6	22.1	
	бН	20.8	21.0	21.3	21.5	22.0	20.8	21.0	21.3	21.5	22.0	
	H8	20.7	20.9	21.2	21.4	21.9	20.7	20.9	21.2	21.4	21.9	
Varia	tions wi	th the ot	serverp	osition	at spacin	g:	100					
5 =	1.0H		3.	7 / -18	.1			3.	7 / -18	.5		
	1.5H		5.	7 / -29	8.			5.	7 / -29	.3		
	2.0H		7.	7 / -30	.3			7.	7 / -30	.3		