


Last information update: May 2024

**Product configuration: P172**

P172: iplan - 625 x 625 mm h 26 mm - neutral white LED - DALI control gear - general light optic

**Product code**P172: iplan - 625 x 625 mm h 26 mm - neutral white LED - DALI control gear - general light optic **Attention! Code no longer in production****Technical description**

Recessed direct emission luminaire designed to use Neutral White 4,000K high colour rendering LEDs and be installed in modular false ceilings with a 625 x 625 mm step. The optical assembly consists of an anodised extruded frame, a methacrylate diffuser screen for general light emission and a painted sheet metal rear closing base. The LEDs are arranged inside the perimeter and the DALI driver is housed in the product.

**Installation**

Recessed in modular false ceilings with a 625 x 625 mm step

**Colour**

Grey (15)

**Mounting**

ceiling pendant

**Wiring**

product complete with DALI components

Complies with EN60598-1 and pertinent regulations




IP20

IP43

On the visible part of the product once installed

**Technical data**


Im system:	4551	Colour temperature [K]:	4000
W system:	39.3	MacAdam Step:	3
Im source:	6150	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	35	Lamp code:	LED
Luminous efficiency (Im/W, real value):	115.8	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	74	Control:	DALI
CRI (minimum):	80		

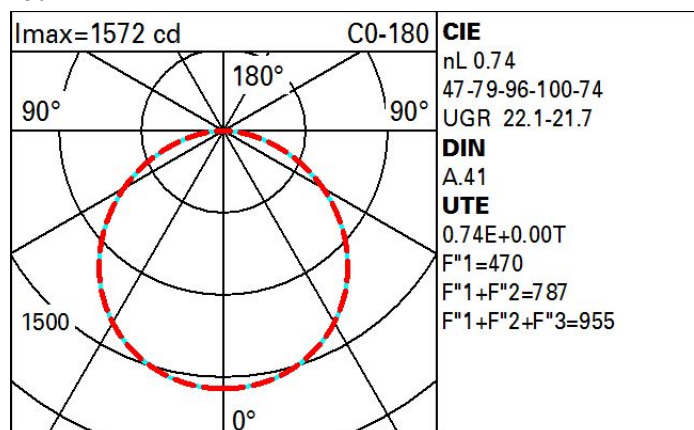**Polar**

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	48	40	35	31	39	34	34	29	39
1.0	53	46	41	36	45	40	39	34	46
1.5	61	55	50	46	54	49	49	44	59
2.0	66	61	57	53	59	56	55	50	68
2.5	68	64	61	58	63	60	59	55	74
3.0	70	67	64	61	65	63	61	58	78
4.0	73	70	67	65	68	66	65	61	83
5.0	74	72	70	68	70	68	67	64	86

# Luminance curve limit

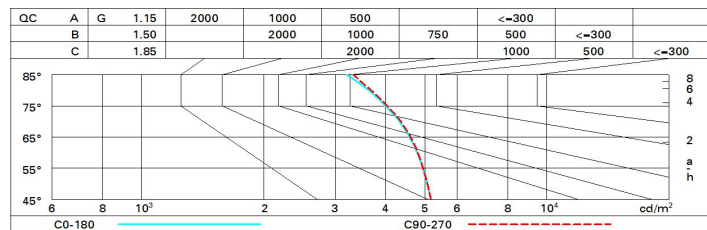

# UGR diagram

Corrected UGR values (at 6150 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	18.3	19.5	18.6	19.7	20.0	18.3	19.5	18.6	19.8	20.0
	3H	19.8	20.9	20.2	21.2	21.5	18.8	19.9	19.1	20.2	20.5
	4H	20.4	21.4	20.8	21.7	22.1	18.9	20.0	19.3	20.3	20.6
	6H	20.9	21.8	21.2	22.2	22.5	19.0	20.0	19.4	20.3	20.7
	8H	21.0	21.9	21.4	22.3	22.6	19.0	20.0	19.4	20.3	20.7
	12H	21.1	22.0	21.5	22.4	22.7	19.0	19.9	19.4	20.2	20.6
4H	2H	18.9	20.0	19.3	20.3	20.6	20.4	21.5	20.8	21.8	22.1
	3H	20.7	21.5	21.1	21.9	22.3	21.1	22.0	21.5	22.3	22.7
	4H	21.4	22.2	21.8	22.5	22.9	21.4	22.2	21.8	22.6	23.0
	6H	21.9	22.6	22.4	23.0	23.5	21.6	22.3	22.1	22.7	23.2
	8H	22.1	22.8	22.6	23.2	23.7	21.7	22.3	22.1	22.7	23.2
	12H	22.3	22.9	22.7	23.3	23.8	21.7	22.3	22.2	22.7	23.2
8H	4H	21.6	22.3	22.1	22.7	23.2	22.2	22.8	22.6	23.3	23.7
	6H	22.4	22.9	22.8	23.3	23.8	22.5	23.1	23.0	23.5	24.0
	8H	22.6	23.1	23.1	23.6	24.1	22.7	23.1	23.2	23.6	24.1
	12H	22.9	23.3	23.4	23.7	24.3	22.8	23.2	23.3	23.7	24.2
12H	4H	21.7	22.2	22.1	22.7	23.1	22.3	22.9	22.8	23.4	23.8
	6H	22.4	22.9	22.9	23.4	23.9	22.7	23.2	23.2	23.7	24.2
	8H	22.7	23.1	23.2	23.6	24.1	22.9	23.3	23.4	23.8	24.3
Variations with the observer position at spacing:											
S =	1.0H	0.1 / -0.1					0.1 / -0.1				
	1.5H	0.3 / -0.4					0.3 / -0.3				
	2.0H	0.4 / -0.5					0.4 / -0.5				