


Last information update: October 2020

Product configuration: 7578+1829

7578: Single model Pole complete with diffuser 1x26 W TC-T H= 1100 mm



Product code

7578: Single model Pole complete with diffuser 1x26 W TC-T H= 1100 mm **Attention! Code no longer in production**

Technical description

Pole-mounted luminaire for outdoor lighting, designed for use with 26W compact fluorescent lamps TC-T. The system comprises a moulded glass diffuser fixed to a support in thermoplastic material, equipped with a sheet aluminium flow director. A diecast aluminium external frame (secured to the plate by steel screws) fixes the screen to the plate. The lamp compartment is fixed to the pole by a special connecting arm in polycarbonate. The pole is made of extruded aluminium and its upper part is enclosed by a special diecast aluminium tap on a neoprene gasket. The pole is fixed to the ground by a special aluminium anchoring base. Nuts and bolts are in stainless steel.

Installation

Fixture fixed to the ground by a special aluminium anchoring base.

Colour

Black (04) | Grey (15)

Mounting

ground anchored

Wiring

Direct connection to 230V mains voltage.

Complies with EN60598-1 and pertinent regulations



960°C


IP54



Technical data

Im system:	758	Colour temperature [K]:	2700
W system:	28	Ballast losses [W]:	2
Im source:	1800	Voltage [Vin]:	230
W source:	26	Lamp code:	1829
Luminous efficiency (lm/W, real value):	27.1	Socket:	GX24d-3
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	141	ZVEI Code:	TC-T
Light Output Ratio (L.O.R.) [%]:	42	Number of optical assemblies:	1
CRI:	85	Ambient operating temperature range:	from -20°C to +35°C.

Polar

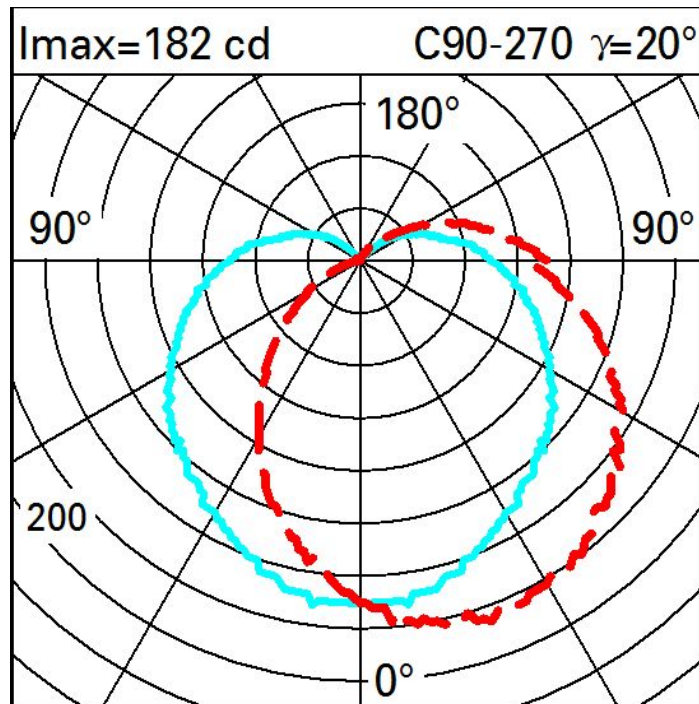

Isolux

