

Last information update: May 2024

Product configuration: MP33

MP33: rectangular recessed luminaire with 3 optical assemblies - warm white passive dissipation LEDs - integrated DALI control gear - wide flood

**Product code**MP33: rectangular recessed luminaire with 3 optical assemblies - warm white passive dissipation LEDs - integrated DALI control gear - wide flood **Attention! Code no longer in production****Technical description**

Multiple recessed adjustable removable luminaire for LED lamp with passive heat dissipation system. Sheet steel perimeter frame. Main structure made of die-cast aluminium. Steel rotation hinges. Die-cast aluminium lamp bodies with shaped surface for high level radiant effect for effectively reducing the temperature and keeping the long-term LED lamp performance unchanged. Chrome-plated aluminium lamp body closing rings. Reflectors with high efficiency super-pure aluminium optic - wide flood beam angle. Orientamento dei corpi con dispositivi di manovra manuale: interno 29° - esterno 75° - rotazione sull'asse 355°; in fase di orientamento e rotazione i corpi lampada sono soggetti ad alcune limitazioni consultabili sul foglio istruzioni. Supplied with DALI dimmable control gear units connected to the luminaire. Warm white high efficiency LED.

Installation

recessed: preparation slot 138 x 386 mm; perimeter frame preliminary fixing on false ceiling (min. thickness 1 mm) with adjustable metal brackets; main structure inserted and mechanically locked on the frame

Colour

White / Aluminium (39) | Grey / Black / Aluminium (E1)

Mounting

ceiling recessed

Wiring

on control gear box with quick-coupling connections; each lamp body has a specific ballast, allowing separate switch ons

Notes

the configuration of the lamp bodies causes some limitations during angling and rotation; consult the instructions leaflet

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	4676	CRI:	80
W system:	46.5	Colour temperature [K]:	3000
Im source:	2000	MacAdam Step:	2
W source:	13	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	100.6	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	78	Number of optical assemblies:	3
Beam angle [°]:	54°	Control:	DALI


Polar

Imax=2071 cd		CIE		Lux	
90°		nL 0.78		h	d
180°		97-100-100-100-78		Em	Emax
90°		UGR 15.0-15.0		2	2
2000		DIN		4	4.1
0°		A.61		6	6.1
α=54°		UTE		8	8.2
		0.78A+0.00T			
		F*1=965			
		F*1+F*2=997			
		F*1+F*2+F*3=1000			
		CIBSE			
		LG3 L<1500 cd/m² at 65°			
		UGR<16 L<1500 cd/mq @65°			

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	69	65	63	60	65	62	62	59	76
1.0	72	69	66	65	68	66	66	63	81
1.5	76	74	72	70	73	71	70	68	87
2.0	79	77	75	74	76	75	74	71	92
2.5	80	79	78	77	78	77	76	74	95
3.0	81	80	80	79	79	78	77	75	97
4.0	83	82	81	81	80	80	79	77	98
5.0	83	82	82	82	81	81	79	78	99

Luminance curve limit

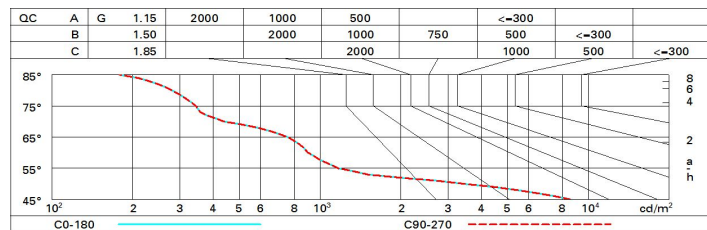

UGR diagram

Corrected UGR values (at 2000 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	15.6	16.2	15.8	16.4	16.7	15.6	16.2	15.8	16.4	16.7
	3H	15.4	16.0	15.7	16.3	16.5	15.4	16.0	15.7	16.3	16.5
	4H	15.4	15.9	15.7	16.2	16.5	15.4	15.9	15.7	16.2	16.5
	6H	15.3	15.8	15.6	16.1	16.4	15.3	15.8	15.6	16.1	16.4
	8H	15.2	15.7	15.6	16.0	16.4	15.2	15.7	15.6	16.0	16.4
	12H	15.2	15.6	15.6	16.0	16.3	15.2	15.6	15.6	16.0	16.3
4H	2H	15.4	15.9	15.7	16.2	16.5	15.4	15.9	15.7	16.2	16.5
	3H	15.2	15.7	15.6	16.0	16.3	15.2	15.7	15.6	16.0	16.3
	4H	15.1	15.5	15.5	15.9	16.3	15.1	15.5	15.5	15.9	16.3
	6H	15.0	15.4	15.5	15.8	16.2	15.0	15.4	15.5	15.8	16.2
	8H	15.0	15.3	15.4	15.7	16.2	15.0	15.3	15.4	15.7	16.2
	12H	14.9	15.2	15.4	15.7	16.1	14.9	15.2	15.4	15.7	16.1
8H	4H	15.0	15.3	15.4	15.7	16.2	15.0	15.3	15.4	15.7	16.2
	6H	14.9	15.2	15.4	15.6	16.1	14.9	15.2	15.4	15.6	16.1
	8H	14.9	15.1	15.3	15.5	16.0	14.9	15.1	15.3	15.5	16.0
	12H	14.8	15.0	15.3	15.5	16.0	14.8	15.0	15.3	15.5	16.0
12H	4H	14.9	15.2	15.4	15.7	16.1	14.9	15.2	15.4	15.7	16.1
	6H	14.8	15.1	15.3	15.5	16.0	14.9	15.1	15.3	15.5	16.0
	8H	14.8	15.0	15.3	15.5	16.0	14.8	15.0	15.3	15.5	16.0
Variations with the observer position at spacing:											
S =	1.0H	5.1 / -13.5					5.1 / -13.5				
	1.5H	7.9 / -14.7					7.9 / -14.7				
	2.0H	9.9 / -15.9					9.9 / -15.9				