


Last information update: February 2025

**Product configuration: QU64**

QU64: Ø 234 mm - warm white - dali

**Product code**

QU64: Ø 234 mm - warm white - dali

**Technical description**

A round luminaire that can be surface or pendant-mounted using a kit to be ordered separately. The product is designed to use LED lamps with C.o.B. technology. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. The product is fitted with a passive dissipation system. Luminaire complete with LED lamp in warm white colour tone (3000K). Light emission UGR<19 L<3000 cd/m<sup>2</sup> ideal for environments with video terminals.

**Installation**

surface or pendant-mounted using a kit to be ordered as an accessory.

**Colour**

White / Aluminium (39) | Black / Aluminium (40)

**Weight (Kg)**

1.83

**Mounting**

ceiling surface

**Wiring**

product complete with dali components

Complies with EN60598-1 and pertinent regulations



IP40

**Technical data**

|  |       |                                       |                                 |
|--|-------|---------------------------------------|---------------------------------|
| lm system:   | 3696  | Colour temperature [K]:               | 3000                            |
| W system:  | 36.7  | MacAdam Step:                         | 2                               |
| lm source:   | 4400  | Life Time LED 1:                      | > 50,000h - L90 - B10 (Ta 25°C) |
| W source:  | 32    | Lamp code:                            | LED                             |
| Luminous efficiency (lm/W, real value):            | 100.7 | Number of lamps for optical assembly: | 1                               |
| lm in emergency mode:                              | -     | ZVEI Code:                            | LED                             |
| Total light flux at or above an angle of 90° [Lm]: | 0     | Number of optical assemblies:         | 1                               |
| Light Output Ratio (L.O.R.) [%]:                   | 84    | Control:                              | DALI-2                          |
| CRI (minimum):                                     | 90    |                                       |                                 |


**Polar**

| Imax=3358 cd |  | CIE   |  | Lux |     |     |                  |
|--------------|--|---|--|-----|-----|-----|------------------|
|              |  |   |  | h   | d   | Em  | E <sub>max</sub> |
|              |  | nL 0.84<br>93-100-100-100-84<br>UGR 16.9-16.9<br><b>DIN</b><br>A.61<br><b>UTE</b><br>0.84A+0.00T<br>F*1=933<br>F*1+F*2=999<br>F*1+F*2+F*3=1000<br><b>CIBSE</b><br>LG3 L<1500 cd/m <sup>2</sup> at 65°<br>UGR<19   L<1500 cd/mq @65° |  | 2   | 2.5 | 669 | 831              |
|              |  |   |  | 4   | 5   | 167 | 208              |
|              |  |   |  | 6   | 7.5 | 74  | 92               |
|              |  |   |  | 8   | 10  | 42  | 52               |
|              |  |   |  |     |     |     |                  |

# Utilisation factors

| R    | 77 | 75 | 73 | 71 | 55 | 53 | 33 | 00 | DRR |
|------|----|----|----|----|----|----|----|----|-----|
| K0.8 | 73 | 69 | 66 | 63 | 68 | 65 | 65 | 62 | 73  |
| 1.0  | 77 | 73 | 70 | 68 | 72 | 70 | 69 | 66 | 79  |
| 1.5  | 82 | 79 | 76 | 74 | 78 | 76 | 75 | 72 | 86  |
| 2.0  | 85 | 82 | 81 | 79 | 81 | 80 | 79 | 76 | 91  |
| 2.5  | 86 | 85 | 83 | 82 | 83 | 82 | 81 | 79 | 94  |
| 3.0  | 87 | 86 | 85 | 84 | 85 | 84 | 83 | 81 | 96  |
| 4.0  | 89 | 88 | 87 | 86 | 86 | 86 | 84 | 82 | 98  |
| 5.0  | 89 | 88 | 88 | 87 | 87 | 86 | 85 | 83 | 99  |

# Luminance curve limit

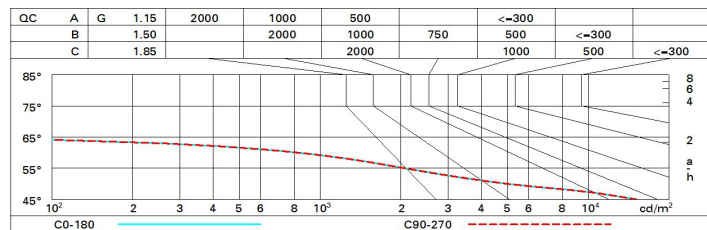

# UGR diagram

| Corrected UGR values (at 4400 lm bare lamp luminous flux)        |      |                     |      |      |      |      |                   |      |      |      |      |
|--|------|---------------------|------|------|------|------|-------------------|------|------|------|------|
| Reflect.:<br>ceiling/cav<br>walls<br>work pl.<br>Room dim<br>x y |      | viewed<br>crosswise |      |      |      |      | viewed<br>endwise |      |      |      |      |
|  |      | 0.70                | 0.70 | 0.50 | 0.50 | 0.30 | 0.70              | 0.70 | 0.50 | 0.50 | 0.30 |
|  |      | 0.50                | 0.30 | 0.50 | 0.30 | 0.30 | 0.50              | 0.30 | 0.50 | 0.30 | 0.30 |
|  |      | 0.20                | 0.20 | 0.20 | 0.20 | 0.20 | 0.20              | 0.20 | 0.20 | 0.20 | 0.20 |
|  |      |                     |      |      |      |      |                   |      |      |      |      |
| 2H   | 2H   | 17.5                | 18.1 | 17.8 | 18.4 | 18.6 | 17.5              | 18.1 | 17.8 | 18.4 | 18.6 |
|  | 3H   | 17.4                | 17.9 | 17.7 | 18.2 | 18.5 | 17.4              | 17.9 | 17.7 | 18.2 | 18.5 |
|  | 4H   | 17.3                | 17.8 | 17.6 | 18.1 | 18.4 | 17.3              | 17.8 | 17.7 | 18.1 | 18.4 |
|  | 6H   | 17.2                | 17.7 | 17.6 | 18.0 | 18.3 | 17.2              | 17.7 | 17.6 | 18.0 | 18.4 |
|  | 8H   | 17.2                | 17.7 | 17.6 | 18.0 | 18.3 | 17.2              | 17.7 | 17.6 | 18.0 | 18.3 |
|  | 12H  | 17.2                | 17.6 | 17.5 | 17.9 | 18.3 | 17.2              | 17.6 | 17.5 | 17.9 | 18.3 |
|  |      |                     |      |      |      |      |                   |      |      |      |      |
| 4H   | 2H   | 17.3                | 17.8 | 17.7 | 18.1 | 18.4 | 17.3              | 17.8 | 17.6 | 18.1 | 18.4 |
|  | 3H   | 17.2                | 17.6 | 17.5 | 17.9 | 18.3 | 17.2              | 17.6 | 17.5 | 17.9 | 18.3 |
|  | 4H   | 17.1                | 17.5 | 17.5 | 17.8 | 18.2 | 17.1              | 17.5 | 17.5 | 17.8 | 18.2 |
|  | 6H   | 17.0                | 17.3 | 17.4 | 17.7 | 18.1 | 17.0              | 17.3 | 17.4 | 17.7 | 18.1 |
|  | 8H   | 16.9                | 17.3 | 17.4 | 17.7 | 18.1 | 16.9              | 17.3 | 17.4 | 17.7 | 18.1 |
|  | 12H  | 16.9                | 17.2 | 17.3 | 17.6 | 18.1 | 16.9              | 17.2 | 17.3 | 17.6 | 18.1 |
|  |      |                     |      |      |      |      |                   |      |      |      |      |
| 8H   | 4H   | 16.9                | 17.3 | 17.4 | 17.7 | 18.1 | 16.9              | 17.3 | 17.4 | 17.7 | 18.1 |
|  | 6H   | 16.8                | 17.1 | 17.3 | 17.5 | 18.0 | 16.8              | 17.1 | 17.3 | 17.5 | 18.0 |
|  | 8H   | 16.8                | 17.0 | 17.3 | 17.5 | 18.0 | 16.8              | 17.0 | 17.3 | 17.5 | 18.0 |
|  | 12H  | 16.7                | 16.9 | 17.2 | 17.4 | 17.9 | 16.7              | 16.9 | 17.2 | 17.4 | 17.9 |
|  |      |                     |      |      |      |      |                   |      |      |      |      |
| 12H  | 4H   | 16.9                | 17.2 | 17.3 | 17.6 | 18.1 | 16.9              | 17.2 | 17.3 | 17.6 | 18.1 |
|  | 6H   | 16.8                | 17.0 | 17.3 | 17.5 | 18.0 | 16.8              | 17.0 | 17.3 | 17.5 | 18.0 |
|  | 8H   | 16.7                | 16.9 | 17.2 | 17.4 | 17.9 | 16.7              | 16.9 | 17.2 | 17.4 | 17.9 |
|  |      |                     |      |      |      |      |                   |      |      |      |      |
| Variations with the observer position at spacing:                |      |                     |      |      |      |      |                   |      |      |      |      |
| S =  | 1.0H | 4.1 / -13.2         |      |      |      |      | 4.1 / -13.2       |      |      |      |      |
|  | 1.5H | 6.8 / -26.0         |      |      |      |      | 6.8 / -26.0       |      |      |      |      |
|  | 2.0H | 8.8 / -39.4         |      |      |      |      | 8.8 / -39.4       |      |      |      |      |