iGuzzini

Last information update: May 2024

Product configuration: MP26

MP26: rectangular recessed luminaire with 2 optical assemblies - warm white passive dissipation LEDs - integrated DALI control gear - wide flood

Product code

MP26: rectangular recessed luminaire with 2 optical assemblies - warm white passive dissipation LEDs - integrated DALI control gear - wide flood Attention! Code no longer in production

Technical description

Multiple recessed adjustable removable luminaire for LED lamp with passive heat dissipation system. Sheet steel perimeter frame. Main structure made of die-cast aluminium. Steel rotation hinges. Die-cast aluminium lamp bodies with shaped surface for high level radiant effect for effectively reducing the temperature and keeping the long-term LED lamp performance unchanged. Chrome-plated aluminium lamp body closing rings. Reflectors with high efficiency super-pure aluminium optic - wide flood beam angle. Orientamento dei corpi con dispositivi di manovra manuale: interno 29° -esterno 75° - rotazione sull'asse 355°; in fase di orientamento e rotazione i corpi lampada sono soggetti ad alcune limitazioni consultabili sul foglio istruzioni. Supplied with DALI dimmable control gear units connected to the luminaire. Warm white high efficiency LED.

Installation

Colour

Mounting

recessed: preparation slot 138 x 270 mm; perimeter frame preliminary fixing on false ceiling (min. thickness 1 mm) with adjustable metal brackets; main structure inserted and mechanically locked on the frame

282x151

270x138

ceiling recessed

00

Wiring on control gear box with quick-coupling connections; each lamp body has a specific ballast, allowing separate switch ons

Notes

the configuration of the lamp bodies causes some limitations during angling and rotation; consult the instructions leaflet


Complies with EN60598-1 and pertinent regulations



White / Aluminium (39) | Grey / Black / Aluminium (E1)

Technical data					
Im system:	3117	CRI:	80		
W system:	31	Colour temperature [K]:	3000		
Im source:	2000	MacAdam Step:	2		
W source:	13	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)		
Luminous efficiency (Im/W,	100.6	Lamp code:	LED		
real value):		Number of lamps for optical	1		
Im in emergency mode:	-	assembly:			
Total light flux at or above	0	ZVEI Code:	LED		
an angle of 90° [Lm]:		Number of optical	2		
Light Output Ratio (L.O.R.)	78	assemblies:			
[%]:		Control:	DALI		
Beam angle [°]:	54°				

Polar

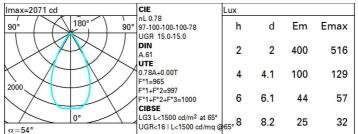

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	69	65	63	60	65	62	62	59	76
1.0	72	69	66	65	68	66	66	63	81
1.5	76	74	72	70	73	71	70	68	87
2.0	79	77	75	74	76	75	74	71	92
2.5	80	79	78	77	78	77	76	74	95
3.0	81	80	80	79	79	78	77	75	97
4.0	83	82	81	81	80	80	79	77	98
5.0	83	82	82	82	81	81	79	78	99

Luminance curve limit

QC	Α	G	1.15	20	00	1	000		500			<-	300			
	в		1.50			2	000		1000	1 5	750	5	00	<-	300	
	С		1.85						2000			10	000	5	00	<=300
85°						 		1		h			<u> </u>			- 8
75°							_	+	ĹĹ	μ	+		4		_	- 6
65°				+	-		-	_	\rightarrow		\rightarrow		\geq			2
55°				-	-									\wedge		- a
45° 1	0 ²		2	3	4 5	56	8	10 ³		2	3	4 5	6	8 1	04	cd/m ²
	C0-180	_				_				C90-	270					

UGR diagram

Rifle	et :										
ce il/c		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls work pl.		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20		0.20	0.20	0.20	0.20	0.20	0.20	0.20	
Room dim		8351000		viewed		viewed					
x	У		c	rosswis	е	endwise					
2H	2H	15.6	16.2	15.8	16.4	16.7	15.6	16.2	15.8	16.4	16.7
	ЗН	15.4	16.0	15.7	16.3	16.5	15.4	16.0	15.7	16.3	16.5
	4H	15.4	15.9	15.7	16.2	16.5	15.4	15.9	15.7	16.2	16.5
	бH	15.3	15.8	15.6	16.1	16.4	15.3	15.8	15.6	16.1	16.
	BH	15.2	15.7	15.6	16.0	16.4	15.2	15.7	15.6	16.0	16.4
	12H	15.2	15.6	15.6	16.0	16.3	15.2	15.6	15.6	16.0	16.3
4H	2H	15.4	15.9	15.7	16.2	16.5	15.4	15.9	15.7	16.2	16.
	ЗH	15.2	15.7	15.6	16.0	16.3	15.2	15.7	15.6	16.0	16.3
	4H	15.1	15.5	15.5	15.9	16.3	15.1	15.5	15.5	15.9	16.
	6H	15.0	15.4	15.5	15.8	16.2	15.0	15.4	15.5	15.8	16.
	BH	15.0	15.3	15.4	15.7	16.2	15.0	15.3	15.4	15.7	16.
	12H	14.9	15.2	15.4	15.7	16.1	14.9	15.2	15.4	15.7	16.
вн	4H	15.0	15.3	15.4	15.7	16.2	15.0	15.3	15.4	15.7	16.
	6H	14.9	15.2	15.4	15.6	16.1	14.9	15.2	15.4	15.6	16.
	BH	14.9	15.1	15.3	15.5	16.0	14.9	15.1	15.3	15.5	16.0
	12H	14.8	15.0	15.3	15.5	16.0	14.8	15.0	15.3	15.5	16.0
12H	4H	14.9	15.2	15.4	15.7	16.1	14.9	15.2	15.4	15.7	16.
	бH	14.8	15.1	15.3	15.5	16.0	14.9	15.1	15.3	15.5	16.0
	8H	14.8	15.0	15.3	15.5	16.0	14.8	15.0	15.3	15.5	16.0
Varia	itions wi	th the ot	pserverp	osition a	at spacin	g:					
S =	1.0H		5.	1 / -13	.5	5.1 / -13.5					
	1.5H		7.	9 / -14	.7	7.9 / -14.7					