

Coefficienti di utilizzazione

R	77	75	73	71	55	53	33	00	DRR
K0.8	64	59	56	54	58	56	55	52	70
1.0	67	63	60	58	62	60	59	56	75
1.5	72	69	66	64	68	66	65	62	83
2.0	75	72	70	69	71	70	69	66	88
2.5	76	74	73	72	73	72	71	69	92
3.0	77	76	75	74	75	74	73	71	94
4.0	79	77	77	76	76	75	74	72	96
5.0	79	78	78	77	77	76	75	73	97

Curva limite di luminanza

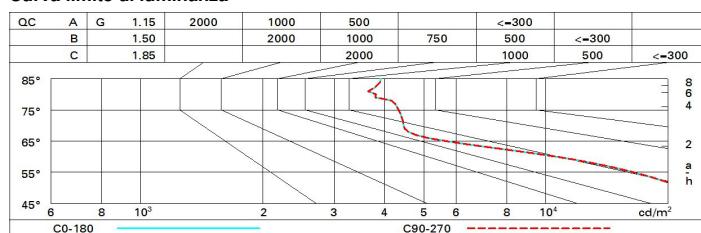


Diagramma UGR

Corrected UGR values (at 2100 lm bare lamp luminous flux)									
Reflect.:		viewed crosswise					viewed endwise		
ceil/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise		
X	Y								
2H	2H	18.7	19.4	19.0	19.6	19.9	18.7	19.4	19.0
	3H	18.7	19.3	19.1	19.6	19.9	18.8	19.4	19.1
	4H	18.7	19.3	19.1	19.6	19.9	18.7	19.3	19.1
	6H	18.7	19.3	19.1	19.6	19.9	18.7	19.2	19.0
	8H	18.7	19.3	19.1	19.6	19.9	18.6	19.1	19.0
	12H	18.7	19.2	19.1	19.6	19.9	18.6	19.1	19.0
4H	2H	18.7	19.3	19.1	19.6	19.9	18.7	19.3	19.1
	3H	18.8	19.3	19.2	19.6	20.0	18.8	19.3	19.2
	4H	18.8	19.3	19.2	19.6	20.0	18.8	19.3	19.2
	6H	18.9	19.2	19.3	19.6	20.1	18.8	19.2	19.6
	8H	18.9	19.2	19.3	19.6	20.1	18.8	19.1	19.5
	12H	18.9	19.2	19.3	19.6	20.1	18.7	19.0	19.5
8H	4H	18.8	19.1	19.2	19.5	20.0	18.9	19.2	19.3
	6H	18.9	19.1	19.3	19.6	20.1	18.9	19.2	19.4
	8H	18.9	19.1	19.4	19.6	20.1	18.9	19.1	19.6
	12H	18.9	19.1	19.4	19.6	20.1	18.9	19.1	19.6
12H	4H	18.7	19.0	19.2	19.5	19.9	18.9	19.2	19.3
	6H	18.8	19.1	19.3	19.5	20.0	18.9	19.1	19.6
	8H	18.9	19.1	19.4	19.6	20.1	18.9	19.1	19.6

Variations with the observer position at spacing:

S = 1.0H	1.4 / -1.5	1.4 / -1.5
1.5H	3.1 / -3.7	3.1 / -3.7
2.0H	4.8 / -4.9	4.8 / -4.9