


Last information update: November 2024

Product configuration: Q474

Q474: Frame 3 cells - Flood beam - LED



Product code

Q474: Frame 3 cells - Flood beam - LED

Technical description

Linear miniaturised recessed luminaire with 3 optical elements for LED lamps - fixed optics. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient flow and a high level of controlled glare visual comfort. Main body with die-cast zamak radiant surface, version with perimeter surface frame. Metallised, thermoplastic, high definition Opti Beam reflectors, integrated in a set-back position in the anti-glare screen. Ballast not included, available with separate code.

Installation

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 24 x 60.

Colour

White (01) | Black / Black (43) | Black / White (47) | White/Gold (41)* | Grey / Black (74)* | White / burnished chrome (E7)*

Weight (Kg)

0.15

* Colours on request


Mounting

wall recessed|ceiling recessed

Wiring

Direct current ballasts to be ordered separately; ON-OFF - code no. MXF9 (min 1 / max 2); dimmable DALI - code no. BZM4 (min 1 / max 6) - check the instruction sheet for the lengths and compatible cross-sections of the cables to be used.

Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	448	CRI (minimum):	90
W system:	6	Colour temperature [K]:	2700
Im source:	540	MacAdam Step:	2
W source:	6	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	74.7	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	83	Number of optical assemblies:	1
Beam angle [°]:	43°	LED current [mA]:	700


Polar

	Imax=921 cd 90° 180° 90° 900 0° α=42°	CIE nL 0.83 100-100-100-100-83 UGR <10-<10 DIN A.61 UTE 0.83A+0.00T F*1=999 F*1+F*2=1000 F*1+F*2+F*3=1000 CIBSE LG3 L<1500 cd/m² at 65° UGR<10 L<1500 cd/mq @65°	Lux h d Em Emax 1 0.8 749 914 2 1.5 187 228 3 2.3 83 102 4 3.1 47 57
--	--	---	--

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	68	65	78
1.0	78	75	72	70	74	72	71	69	83
1.5	82	80	77	76	79	77	76	74	89
2.0	85	83	81	80	82	80	79	77	93
2.5	86	85	84	83	84	83	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	88	87	87	85	83	100

Luminance curve limit

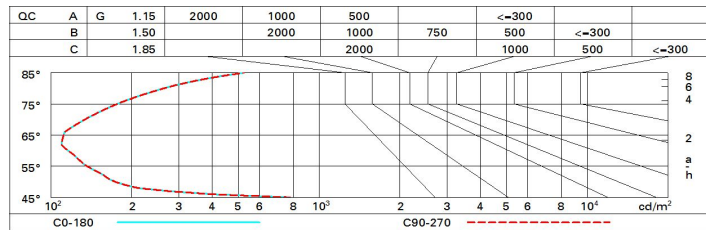

UGR diagram

Corrected UGR values (at 540 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	7.2	7.6	7.4	7.9	8.1	7.2	7.6	7.4	7.9	8.1
	3H	7.0	7.5	7.3	7.7	8.0	7.0	7.5	7.3	7.7	8.0
	4H	7.0	7.4	7.3	7.7	8.0	7.0	7.4	7.3	7.7	8.0
	6H	6.9	7.3	7.2	7.6	7.9	6.9	7.3	7.2	7.6	7.9
	8H	6.9	7.2	7.2	7.5	7.9	6.9	7.2	7.2	7.5	7.9
12H	6.8	7.2	7.2	7.5	7.9	6.8	7.2	7.2	7.5	7.8	
4H	2H	7.0	7.4	7.3	7.7	8.0	7.0	7.4	7.3	7.7	8.0
	3H	6.8	7.2	7.2	7.5	7.9	6.8	7.2	7.2	7.5	7.9
	4H	6.7	7.0	7.1	7.4	7.8	6.7	7.0	7.1	7.4	7.8
	6H	6.6	6.9	7.1	7.3	7.7	6.6	6.9	7.1	7.3	7.7
	8H	6.6	6.9	7.0	7.3	7.7	6.6	6.8	7.0	7.3	7.7
12H	6.6	6.8	7.0	7.2	7.7	6.5	6.8	7.0	7.2	7.7	
8H	4H	6.6	6.8	7.0	7.3	7.7	6.6	6.9	7.0	7.3	7.7
	6H	6.5	6.7	7.0	7.2	7.6	6.5	6.7	7.0	7.2	7.6
	8H	6.5	6.6	6.9	7.1	7.6	6.5	6.6	6.9	7.1	7.6
	12H	6.4	6.6	6.9	7.1	7.6	6.4	6.6	6.9	7.0	7.6
12H	4H	6.5	6.8	7.0	7.2	7.7	6.6	6.8	7.0	7.2	7.7
	6H	6.5	6.6	6.9	7.1	7.6	6.5	6.6	7.0	7.1	7.6
	8H	6.4	6.6	6.9	7.0	7.6	6.4	6.6	6.9	7.1	7.6
Variations with the observer position at spacing:											
S =	1.0H	7.0 / -14.5					7.0 / -14.5				
	1.5H	9.8 / -14.7					9.8 / -14.7				
	2.0H	11.8 / -14.8					11.8 / -14.8				