

Last information update: November 2024

**Product configuration: Q264**

Q264: fixed circular recessed luminaire - Ø153 mm - tunable white



**Product code**

Q264: fixed circular recessed luminaire - Ø153 mm - tunable white

**Technical description**

Round fixed luminaire designed to use LED lamps with C.o.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with tunable White LED with a colour change temperature from 2700K to 6500K. General light emission, with controlled luminance UGR<19 1500 cd/m2  $\alpha$ >65° flood optic.

**Installation**

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 20 mm.

**Colour**

White / Aluminium (39)

**Weight (Kg)**

1.2

**Mounting**

ceiling recessed


**Wiring**

Product complete with DALI dimmable power supply.

**Notes**

DT8 - 1 DALI address


Complies with EN60598-1 and pertinent regulations



**Technical data**

lm system:	2124	Life Time LED 1:	50,000h - L80 - B10 (Ta 25°C)
W system:	23.6	Lamp code:	LED
lm source:	2950	Number of lamps for optical assembly:	1
W source:	21	ZVEI Code:	LED
Luminous efficiency (lm/W, real value):	90	Number of optical assemblies:	1
lm in emergency mode:	-	Power factor:	See installation instructions
Total light flux at or above an angle of 90° [Lm]:	0	Minimum dimming %:	1
Light Output Ratio (L.O.R.) [%]:	72	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Beam angle [°]:	58°	Control:	DALI-2
Colour temperature [K]:	Tunable white 2700 - 6500		


**Polar**

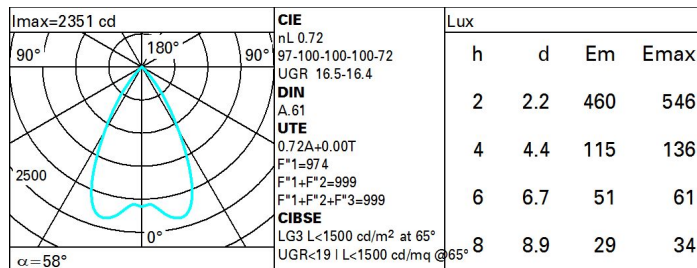

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	64	61	58	56	60	58	57	55	77
1.0	67	64	62	60	63	61	61	59	81
1.5	71	68	67	65	68	66	65	63	88
2.0	73	71	70	69	70	69	68	66	92
2.5	74	73	72	71	72	71	70	68	95
3.0	75	74	74	73	73	73	72	70	97
4.0	76	76	75	75	74	74	73	71	99
5.0	77	76	76	76	75	75	73	72	100

Luminance curve limit

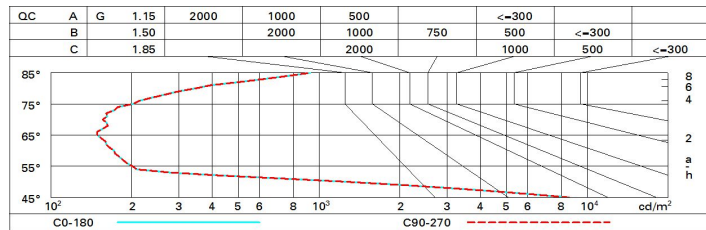

UGR diagram

Corrected UGR values (at 2950 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	17.0	17.7	17.3	17.9	18.2	17.0	17.7	17.3	17.9	18.2
	3H	16.9	17.5	17.2	17.8	18.0	16.9	17.5	17.2	17.8	18.0
	4H	16.8	17.4	17.2	17.7	18.0	16.8	17.4	17.2	17.7	18.0
	6H	16.7	17.2	17.1	17.6	17.9	16.7	17.2	17.1	17.6	17.9
	8H	16.7	17.2	17.1	17.5	17.9	16.7	17.2	17.1	17.5	17.9
12H	16.7	17.1	17.1	17.5	17.8	16.7	17.1	17.0	17.5	17.8	
4H	2H	16.8	17.4	17.2	17.7	18.0	16.8	17.4	17.2	17.7	18.0
	3H	16.7	17.1	17.0	17.5	17.8	16.7	17.1	17.0	17.5	17.8
	4H	16.6	17.0	17.0	17.4	17.7	16.6	17.0	17.0	17.4	17.7
	6H	16.5	16.8	16.9	17.2	17.7	16.5	16.8	16.9	17.2	17.7
	8H	16.5	16.8	16.9	17.2	17.6	16.4	16.8	16.9	17.2	17.6
12H	16.4	16.7	16.9	17.1	17.6	16.4	16.7	16.9	17.1	17.6	
8H	4H	16.4	16.8	16.9	17.2	17.6	16.5	16.8	16.9	17.2	17.6
	6H	16.4	16.6	16.8	17.1	17.5	16.4	16.6	16.8	17.1	17.5
	8H	16.3	16.5	16.8	17.0	17.5	16.3	16.5	16.8	17.0	17.5
	12H	16.3	16.5	16.8	16.9	17.5	16.3	16.5	16.8	16.9	17.5
12H	4H	16.4	16.7	16.9	17.1	17.6	16.4	16.7	16.9	17.1	17.6
	6H	16.3	16.5	16.8	17.0	17.5	16.3	16.5	16.8	17.0	17.5
	8H	16.3	16.5	16.8	16.9	17.5	16.3	16.5	16.8	16.9	17.5
Variations with the observer position at spacing:											
S =	1.0H	5.0 / -17.5				5.0 / -17.5					
	1.5H	7.8 / -17.7				7.8 / -17.7					
	2.0H	9.8 / -18.0				9.8 / -18.0					