

## Laser Blade XS



Design iGuzzini

iGuzzini

Last information update: May 2025

### Product configuration: Q475.01

Q475.01: Frame 4 cells - Wideflood beam - LED - 7.9W 730.4lm - 4000K - CRI 90 - White

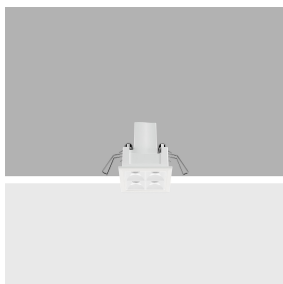

### Product code

Q475.01: Frame 4 cells - Wideflood beam - LED - 7.9W 730.4lm - 4000K - CRI 90 - White

### Technical description

Square miniaturised recessed luminaire with 4 optical elements for LED lamps - fixed optics. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient flow and a high level of visual comfort. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised, thermoplastic, high definition Opti Beam reflectors, integrated in a set-back position in the anti-glare screen. Ballast not included, available with separate code.

### Installation

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 42 x 42.

### Colour

White (01)

### Weight (Kg)

0.11

### Mounting

wall recessed|ceiling recessed

### Wiring

Direct current ballasts to be ordered separately: ON-OFF - code no. MXF9 (min 1 / max 2); dimmable DALI - code no. BZM4 (min 1 / max 5) - check the instruction sheet for the lengths and compatible cross-sections of the cables to be used.

Complies with EN60598-1 and pertinent regulations



### Technical data

lm system:	730	Rf (Colour Fidelity Index):	92
W system:	7.9	Rg (Gamut Index):	98
lm source:	880	Colour temperature [K]:	4000
W source:	7.9	MacAdam Step:	2
Luminous efficiency (lm/W, real value):	92.5	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
lm in emergency mode:	-	Lamp code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of lamps for optical assembly:	1
Light Output Ratio (L.O.R.) [%]:	83	ZVEI Code:	LED
Beam angle [°]:	58°	Number of optical assemblies:	1
CRI (minimum):	90	LED current [mA]:	700


### Polar

	CIE			
	nL 0.83			
	100-100-100-100-83			
	UGR 17.0-17.0			
	DIN A.61			
	UTE			
	0.83A+0.00T			
	F*1=996			
	F*1+F*2=1000			
	F*1+F*2+F*3=1000			
	CIBSE			
	LG3 L<1500 cd/m² at 65°			
	UGR<19   L<1500 cd/mq @65°			
	Lux			
	h	d	Em	E <sub>max</sub>
	1	1.1	740	923
	2	2.2	185	231
	3	3.4	82	103
	4	4.5	46	58

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	68	65	78
1.0	78	75	72	70	74	72	71	69	83
1.5	82	79	77	76	78	77	76	73	89
2.0	85	83	81	80	82	80	79	77	93
2.5	86	85	84	83	84	83	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	88	87	86	85	83	100

# Luminance curve limit

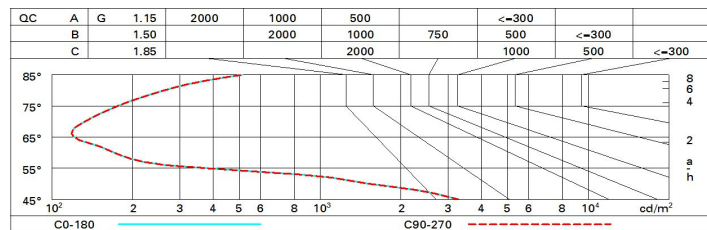

# UGR diagram

Corrected UGR values (at 800 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	17.6	18.2	17.8	18.4	18.6	17.6	18.2	17.8	18.4	18.6
	3H	17.4	18.0	17.7	18.2	18.5	17.4	18.0	17.7	18.2	18.5
	4H	17.4	17.9	17.7	18.1	18.4	17.4	17.9	17.7	18.1	18.4
	6H	17.3	17.7	17.6	18.0	18.4	17.3	17.7	17.6	18.0	18.4
	8H	17.2	17.7	17.6	18.0	18.3	17.2	17.7	17.6	18.0	18.3
	12H	17.2	17.6	17.6	18.0	18.3	17.2	17.6	17.6	18.0	18.3
4H	2H	17.4	17.9	17.7	18.1	18.4	17.4	17.9	17.7	18.1	18.4
	3H	17.2	17.6	17.6	18.0	18.3	17.2	17.6	17.6	18.0	18.3
	4H	17.1	17.5	17.5	17.8	18.2	17.1	17.5	17.5	17.8	18.2
	6H	17.0	17.3	17.4	17.7	18.2	17.0	17.3	17.4	17.7	18.2
	8H	17.0	17.3	17.4	17.7	18.1	17.0	17.3	17.4	17.7	18.1
	12H	16.9	17.2	17.4	17.6	18.1	16.9	17.2	17.4	17.6	18.1
8H	4H	17.0	17.3	17.4	17.7	18.1	17.0	17.3	17.4	17.7	18.1
	6H	16.9	17.1	17.4	17.6	18.0	16.9	17.1	17.4	17.6	18.0
	8H	16.8	17.0	17.3	17.5	18.0	16.8	17.0	17.3	17.5	18.0
	12H	16.8	17.0	17.3	17.4	18.0	16.8	17.0	17.3	17.4	18.0
12H	4H	16.9	17.2	17.4	17.6	18.1	16.9	17.2	17.4	17.6	18.1
	6H	16.8	17.0	17.3	17.5	18.0	16.8	17.0	17.3	17.5	18.0
	8H	16.8	17.0	17.3	17.4	18.0	16.8	17.0	17.3	17.4	18.0
Variations with the observer position at spacing:											
S =	1.0H	6.5 / -24.9					6.5 / -24.9				
	1.5H	9.4 / -25.6					9.4 / -25.6				
	2.0H	11.4 / -25.8					11.4 / -25.8				