

# Palco Recessed / Surface

Design Artec  
Studio

iGuzzini

Last information update: May 2024

## Product configuration: QC63

QC63: Palco single surface Ø51 - flood - integrated driver



### Product code

QC63: Palco single surface Ø51 - flood - integrated driver **Attention! Code no longer in production**

### Technical description

Miniaturised adjustable spotlight for surface installation. Spotlight bodies with a die-cast aluminium dissipation system - cast zamak rotation unit - shaped steel fixing plate - extruded aluminium surface cover module with mechanical coupling system - thermoplastic side end caps. The swivel joints allow the spotlight to be rotated by 360° and tilted by 90°. The set back position of the optic unit guarantees a high level of visual comfort with a thermoplastic high definition lens. Ballast located inside cover module.

### Installation

Installation surface plate fastening - structure attached using a mechanical locking mechanism - insertion of side end caps.

### Colour

White (01) | Black (04)

### Weight (Kg)

0.7

### Mounting

wall surface|ceiling surface

### Wiring

Quick-coupling connection on integrated driver terminals.


### Notes

Technical and anti-glare accessories available.

Complies with EN60598-1 and pertinent regulations



IP40



### Technical data

Im system:	814	CRI (minimum):	90
W system:	18.9	Colour temperature [K]:	2700
Im source:	1380	MacAdam Step:	2
W source:	15	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	43.1	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	59	Number of optical assemblies:	1
Beam angle [°]:	40° / 41°		


### Polar

	C0-180				
	CIE nL 0.59 97-100-100-100-59 UGR 17.2-17.4				
	DIN A.61				
	UTE 0.59A+0.00T F*1=969 F*1+F*2=998 F*1+F*2+F*3=1000				
	CIBSE LG3 L<3000 cd/m² at 65° UGR<19   L<3000 cd/mq @65°				
Lux					
	h	d1	d2	Em	Emax
	1	0.7	0.7	1269	1661
	2	1.5	1.5	317	415
	3	2.2	2.2	141	185
	4	2.9	2.9	79	104

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	53	50	48	46	49	47	47	45	76
1.0	55	52	50	49	52	50	50	48	81
1.5	58	56	54	53	55	54	53	52	87
2.0	60	58	57	56	58	57	56	54	92
2.5	61	60	59	58	59	58	58	56	95
3.0	62	61	60	60	60	59	59	57	97
4.0	62	62	62	61	61	61	60	58	99
5.0	63	62	62	62	61	61	60	59	100

# Luminance curve limit

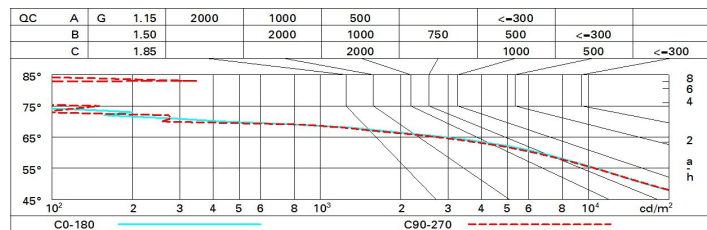

# UGR diagram

Corrected UGR values (at 1380 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	17.8	18.4	18.1	18.6	18.9	17.9	18.6	18.2	18.8	19.1
	3H	17.7	18.2	18.0	18.5	18.8	17.8	18.4	18.2	18.7	19.0
	4H	17.6	18.1	17.9	18.4	18.7	17.8	18.3	18.1	18.6	18.9
	6H	17.5	18.0	17.9	18.3	18.6	17.7	18.2	18.0	18.5	18.8
	8H	17.5	17.9	17.8	18.3	18.6	17.7	18.1	18.0	18.4	18.8
	12H	17.4	17.9	17.8	18.2	18.6	17.6	18.1	18.0	18.4	18.8
4H	2H	17.6	18.1	17.9	18.4	18.7	17.7	18.3	18.1	18.6	18.9
	3H	17.5	17.9	17.8	18.2	18.6	17.6	18.1	18.0	18.4	18.8
	4H	17.4	17.8	17.8	18.1	18.5	17.5	17.9	17.9	18.3	18.7
	6H	17.3	17.6	17.7	18.0	18.4	17.4	17.8	17.9	18.2	18.6
	8H	17.2	17.6	17.7	18.0	18.4	17.4	17.7	17.8	18.1	18.6
	12H	17.2	17.5	17.6	17.9	18.4	17.3	17.6	17.8	18.1	18.5
8H	4H	17.2	17.6	17.7	18.0	18.4	17.4	17.7	17.8	18.1	18.6
	6H	17.1	17.4	17.6	17.8	18.3	17.3	17.6	17.8	18.0	18.5
	8H	17.1	17.3	17.6	17.8	18.3	17.3	17.5	17.7	17.9	18.4
	12H	17.0	17.2	17.5	17.7	18.2	17.2	17.4	17.7	17.9	18.4
12H	4H	17.2	17.5	17.6	17.9	18.4	17.3	17.6	17.8	18.1	18.5
	6H	17.1	17.3	17.6	17.8	18.3	17.3	17.5	17.7	17.9	18.4
	8H	17.0	17.2	17.5	17.7	18.2	17.2	17.4	17.7	17.9	18.4
Variations with the observer position at spacing:											
S =	1.0H	4.9 / -7.9					4.9 / -8.1				
	1.5H	7.7 / -11.8					7.6 / -12.3				
	2.0H	9.7 / -20.3					9.6 / -20.5				