


Last information update: May 2024

Product configuration: EH58

EH58: Pole-mounted system - Warm White - ST1 optic

**Product code**EH58: Pole-mounted system - Warm White - ST1 optic **Attention! Code no longer in production****Technical description**

Outdoor luminaire with direct light street optic for a high level of visual comfort (G4), designed to use LED lamps. The optical assembly and the pole attachment system are made of EN1706AC 46100LF aluminium alloy and subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The painting stage consists of a primer and a liquid acrylic paint, cured at 150 °C, with a high level of weather resistance. Optical assembly and door fixed together by a hinge and three clips, allowing tool-free opening. High level IP protection is guaranteed by the silicone seal interposed between the two elements. Stainless steel door automatic retention system. Optical assembly complete with decompression valve, to clear the internal vacuum for easy opening. Complete with circuit having Neutral White monochrome LEDs, silver aluminium reflectors. LEDs can be substituted in the lab in groups of 12. Control gear, connected using quick-couplings and removed using clips. Driver with automatic internal temperature control system. DALI electronic control gear. Midnight mode (100%-70%) or Bi-energy operation without external programming. Personalised Midnight programmable, fixed dimming, compatibility with flux regulators, via a special programming interface. Replaceable control gear. Installation Pole-top can be installed on ø76mm poles, for ø60mm and ø102mm poles installation is allowed using 6152 (ø60mm) and 6134 (ø102mm) accessories. Versions with poles for burial and with base-plate.

Installation

Pole-top can be installed on poles ø76mm, for poles ø60mm and ø102mm installation is allowed using accessories 6152 (ø60mm) and 6134 (ø102mm). Versions with poles for burial and with base-plate.

Colour

Grey (15)

Weight (Kg)

17.5

Mounting

wall arm|ground surface|wall surface


Wiring

The product is supplied wired with outgoing cable and incorporated connector. Overvoltage protection: 10KV Common Mode and 6KV Differential Mode.

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	9480	MacAdam Step:	3
W system:	99.4	Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)
lm source:	-	Life Time LED 2:	95,000h - L90 - B10 (Ta 40°C)
W source:	-	Life Time LED 3:	100,000h - L80 - B10 (Ta 40°C)
Luminous efficiency (lm/W, real value):	95.4	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	100	Number of optical assemblies:	1
Beam angle [°]:	148° / 109°	Intervallo temperatura ambiente:	from -40°C to 50°C.
CRI (minimum):	70	Control:	DALI
Colour temperature [K]:	3000		

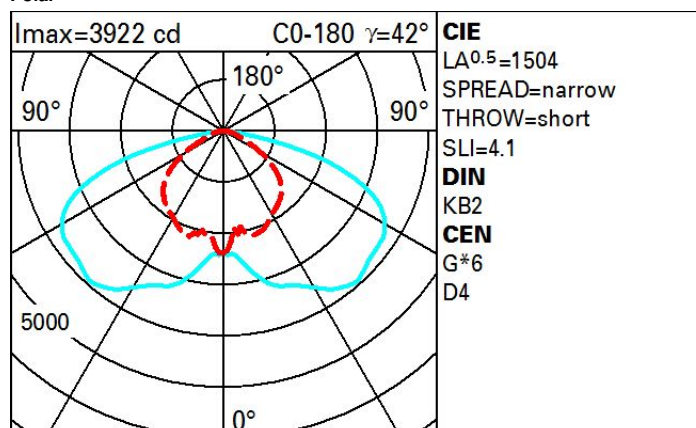Polar

Isolux

