


iGuzzini

Product configuration: MK97

MK97: Spotlight - Small body - LED Neutral White - Electronic ballast - Flood Optic



Product code

MK97: Spotlight - Small body - LED Neutral White - Electronic ballast - Flood Optic **Attention! Code no longer in production**

Technical description

Technical description
Adjustable spotlight with adapter for installation on a mains voltage track. Luminaire made of die-cast aluminium. Spotlight double adjustability allows a 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. Mechanical aiming locks both for rotation about the vertical axis and tilting relative to the horizontal plane. Equipped with ballast. The luminaire comes complete with a LED unit in a neutral white tone.

Installation

Installation

On an electrified track

Colour

White (01) | Black (04) | Grey / Black (74)

Weight (Kg)

1.18

Mounting

three circuit track

Wiring

Wiring
Electronic components housed in the luminaire


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	2477	CRI (minimum):	80
W system:	23.2	Colour temperature [K]:	4000
Im source:	3100	MacAdam Step:	2
W source:	21	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	106.6	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	80	Number of optical assemblies:	1
Beam angle [°]:	42°		


Polar

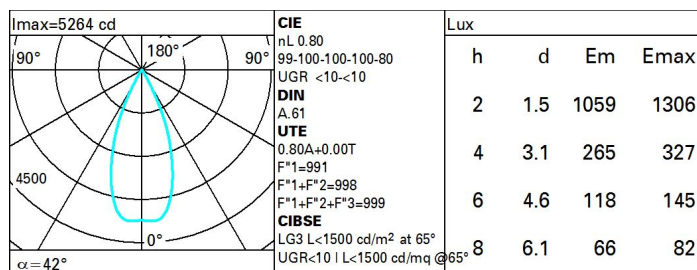

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	68	66	63	67	65	65	62	78
1.0	75	72	69	67	71	69	68	66	82
1.5	79	76	74	73	75	74	73	70	88
2.0	81	79	78	77	78	77	76	74	93
2.5	83	81	80	79	80	79	78	76	95
3.0	84	83	82	81	82	81	80	78	97
4.0	85	84	84	83	83	82	81	79	99
5.0	85	85	84	84	84	83	82	80	100

Luminance curve limit

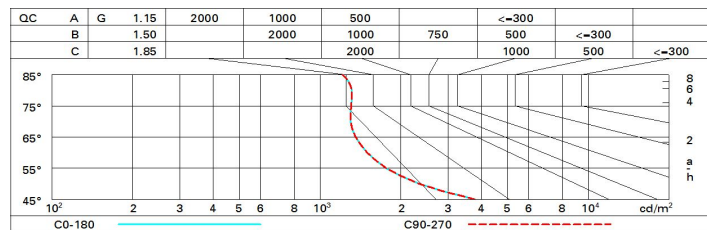

UGR diagram

Corrected UGR values (at 3100 lm bare lamp luminous flux)											
Riflect.: ceil/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	8.8	9.4	9.1	9.6	9.9	8.8	9.4	9.1	9.6	9.9
	3H	8.8	9.3	9.1	9.6	9.8	8.7	9.2	9.0	9.5	9.8
	4H	8.8	9.3	9.1	9.6	9.9	8.7	9.1	9.0	9.4	9.7
	6H	8.8	9.2	9.1	9.5	9.9	8.6	9.0	8.9	9.4	9.7
	8H	8.8	9.2	9.1	9.5	9.9	8.6	9.0	8.9	9.3	9.7
	12H	8.8	9.2	9.1	9.5	9.9	8.5	8.9	8.9	9.3	9.6
4H	2H	8.7	9.1	9.0	9.4	9.7	8.8	9.3	9.1	9.6	9.9
	3H	8.7	9.1	9.0	9.4	9.8	8.7	9.1	9.1	9.5	9.8
	4H	8.7	9.0	9.1	9.4	9.8	8.7	9.0	9.1	9.4	9.8
	6H	8.7	9.0	9.1	9.4	9.8	8.6	9.0	9.1	9.4	9.8
	8H	8.7	9.0	9.2	9.4	9.9	8.6	8.9	9.0	9.3	9.7
	12H	8.7	9.0	9.2	9.4	9.9	8.6	8.8	9.0	9.3	9.7
8H	4H	8.6	8.9	9.0	9.3	9.7	8.7	9.0	9.2	9.4	9.9
	6H	8.7	8.9	9.2	9.4	9.8	8.7	9.0	9.2	9.4	9.9
	8H	8.7	8.9	9.2	9.4	9.9	8.7	8.9	9.2	9.4	9.9
	12H	8.7	8.9	9.2	9.4	9.9	8.7	8.9	9.2	9.4	9.9
12H	4H	8.6	8.8	9.0	9.3	9.7	8.7	9.0	9.2	9.4	9.9
	6H	8.7	8.9	9.1	9.3	9.8	8.7	8.9	9.2	9.4	9.9
	8H	8.7	8.9	9.2	9.4	9.9	8.7	8.9	9.2	9.4	9.9
Variations with the observer position at spacing:											
S =	1.0H	5.3 / -4.9					5.3 / -4.9				
	1.5H	8.0 / -5.3					8.0 / -5.3				
	2.0H	10.0 / -5.5					10.0 / -5.5				