


Letzte Aktualisierung der Informationen: November 2024

Produktkonfiguration: BT28+BZZ0.00

BT28: Linealuce

BZZ0.00: Gehäuse für monochrome statische Version - L=1609 - neutral


Produktcode

BT28: Linealuce


Farben

Grau (15)

Montage

Wandeinbauleuchte|Deckeneinbauleuchte|Bodeneinbauleuchte

Gemäß der Normen EN60598-1 u. Sondernormen


Zubehörcode

BZZ0.00: Gehäuse für monochrome statische Version - L=1609 - neutral

Beschreibung

Aluminium outer casing L=1602mm complete with technopolymer side and upper caps and black rubber membrane cable glands. The side caps are supplied with openable circular walls to facilitate the insertion of corrugated tubes (passage of power cables). To be used on recessed Linealuce Mini modules L=1609mm with static monochrome leds


Installation

For ground- or wall-recessed installation with cast cement/concrete or other suitable material. For ground installation a drainage channel must be created (positioned below the special holes) or gravel inserted for drainage under the outer casing before installation, to guarantee the degree of protection stated.

Farben

Neutral (00)


Gemäß der Normen EN60598-1 u. Sondernormen



Technische Daten

Im System:	572	MacAdam Step:	3
W System:	20.8	Lebensdauer LED 1:	100,000h - L80 - B10 (Ta 25°C)
Im Lichtquelle:	1430	Lebensdauer LED 2:	66,000h - L80 - B10 (Ta 40°C)
W Lichtquelle:	20	Eingangsspannung [V]:	24
Lichtausbeute (lm/W, Systemwert):	27.5	Lampencode:	LED
Im im Notlichtbetrieb:	-	Anzahl Lampen in Leuchtengehäuse:	1
abgegebener Lichtstrom bei/ über einem Winkel von 90° [lm]:	0	ZVEI-Code:	LED
Leuchtenbetriebswirkungsgrad 40 (L.O.R.) [%]:		Anzahl Leuchtengehäuse:	1
Abstrahlwinkel [°]:	46°	Operativer Umgebungstemperaturbereich:	von -30°C von 50°C.
CRI (minimum):	80	LED Strom [mA]:	350
Farbtemperatur [K]:	2700	Control:	DMX

Polardiagramm

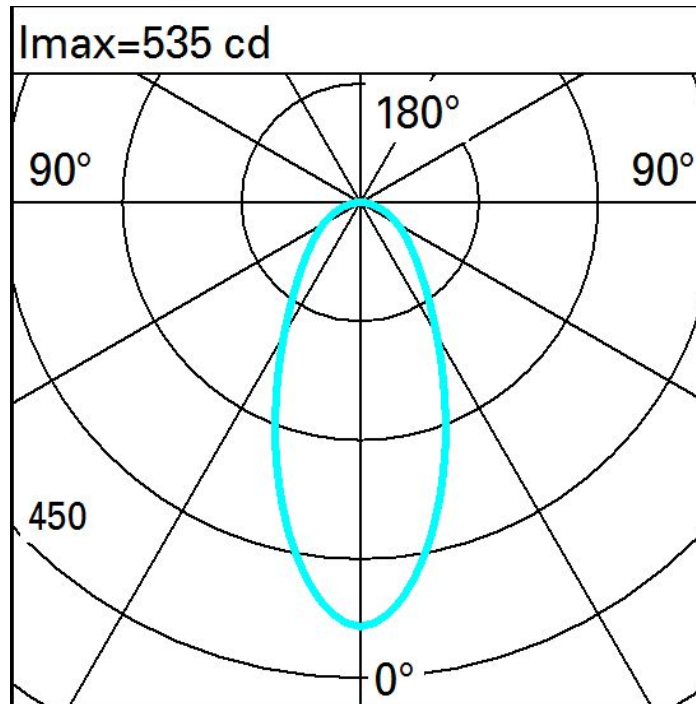

Beleuchtungen

Lux										
Wall distance = 1m										
3										
	0.6	1	3	9	21	31	21	9	3	0.6
2	1	3	6	13	25	34	25	13	6	1
	2	3	6	12	21	28	21	12	6	2
1	2	3	6	10	17	21	17	10	6	2
	2	3	5	9	13	16	13	9	5	2
0										
	m	-2	-1	0	1	2	3			