

## Laser Blade XS



Design iGuzzini

iGuzzini

Last information update: October 2024

### Product configuration: QR79

QR79: Minimal Square 9 cells - Flood beam - Tunable White - LED

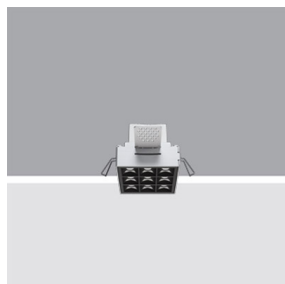

### Product code

QR79: Minimal Square 9 cells - Flood beam - Tunable White - LED

### Technical description

Minimal square 9 optic element recessed miniaturised luminaire. Using LED lamps with a high colour rendering index and a different colour temperature allows dynamic light modulation to be obtained. The variation is achieved by mixing an emission of 5 x 2700K LEDs and 4 x 5700K LEDs. Despite the disparity of lamps that use extreme channels - 2700K and 5700K - the intensity of the flux emitted remains the same. Moreover, even when products of different sizes are used, the colour temperature remains constant and uniform. Main body with die-cast aluminium radiant surface; frameless version for mounting flush with ceiling. Metallised, thermoplastic, high definition Opti Beam reflectors, integrated in a set-back position in the anti-glare screen. The product is designed to be used together with codes 6170 + M630 to obtain a solution suitable for small to medium systems that can be programmed with a DALI protocol via a simple and intuitive user touch-panel. Other management systems are also available with a separate code for larger systems that require the intervention of a specialised technician to programme them: the MH97 + MH93 + MI02 group offers a DALI / KNX programmable solution, and the MH97 + MH93 + M618 group allows the system management to be extended to remote devices like tablet and smartphones too.

### Installation

Recessed with steel wire springs on the specific adapter (included) which allows flush-mounting with the ceiling. Adapter fixed to false ceiling (compatible thicknesses of 12.5 / 15 / 20 mm) with screws; subsequent filling and smoothing operations; insertion of luminaire body and aesthetic end finishing. A special protective sheath allows finishing operations on the plasterboard to be simplified and speeded up. Preparation hole 64 x 64.

### Colour

White (01) | Black (04)

### Weight (Kg)

0.37

### Mounting

wall recessed|ceiling recessed

### Wiring

Various management solutions are available with a separate code. For technical data, properties and connection modes see the instruction sheet.

### Notes

The special steel wire spring provided is required to facilitate the eventual extraction of the recessed body once it has been inserted.

Complies with EN60598-1 and pertinent regulations



### Technical data

Im system:	1245	CRI (minimum):	90
W system:	15	Colour temperature [K]:	Tunable white 2700 - 5700
Im source:	1500	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	15	Lamp code:	LED
Luminous efficiency (Im/W, real value):	83	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	83	LED current [mA]:	600
Beam angle [°]:	43°		


### Polar

Imax=2557 cd		CIE		Lux	
90°	180°	nL 0.83		h	d Em Emax
		100-100-100-100-83		2	1.5 520 635
		UGR <10-<10		4	3.1 130 159
		DIN A.61		6	4.6 58 71
		UTE 0.83A+0.00T		8	6.1 33 40
		F*1=999			
		F*1+F*2=1000			
		F*1+F*2+F*3=1000			
		CIBSE LG3 L<1500 cd/m² at 65°			
		UGR<10   L<1500 cd/mq @65°			
α = 42°					

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	68	65	78
1.0	78	75	72	70	74	72	71	69	83
1.5	82	80	77	76	79	77	76	74	89
2.0	85	83	81	80	82	80	79	77	93
2.5	86	85	84	83	84	83	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	88	87	87	85	83	100

# Luminance curve limit

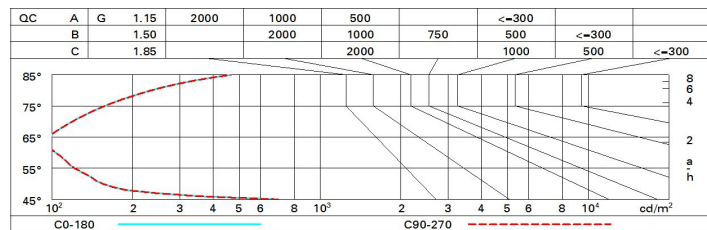

# UGR diagram

Corrected UGR values (at 1500 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	6.8	7.3	7.0	7.6	7.8	6.8	7.3	7.0	7.6	7.8
	3H	6.6	7.1	6.9	7.4	7.7	6.6	7.1	6.9	7.4	7.7
	4H	6.6	7.0	6.9	7.3	7.6	6.5	7.0	6.9	7.3	7.6
	6H	6.5	6.9	6.8	7.2	7.6	6.5	6.9	6.8	7.2	7.6
	8H	6.4	6.9	6.8	7.2	7.5	6.4	6.9	6.8	7.2	7.5
	12H	6.4	6.8	6.8	7.2	7.5	6.4	6.8	6.8	7.1	7.5
4H	2H	6.5	7.0	6.9	7.3	7.6	6.6	7.0	6.9	7.3	7.6
	3H	6.4	6.8	6.8	7.1	7.5	6.4	6.8	6.8	7.1	7.5
	4H	6.3	6.7	6.7	7.0	7.4	6.3	6.7	6.7	7.0	7.4
	6H	6.2	6.5	6.7	6.9	7.4	6.2	6.5	6.6	6.9	7.4
	8H	6.2	6.5	6.6	6.9	7.3	6.2	6.5	6.6	6.9	7.3
	12H	6.1	6.4	6.6	6.8	7.3	6.1	6.4	6.6	6.8	7.3
8H	4H	6.2	6.5	6.6	6.9	7.3	6.2	6.5	6.6	6.9	7.3
	6H	6.1	6.3	6.6	6.8	7.3	6.1	6.3	6.6	6.8	7.3
	8H	6.0	6.3	6.5	6.7	7.2	6.0	6.3	6.5	6.7	7.2
	12H	6.0	6.2	6.5	6.7	7.2	6.0	6.2	6.5	6.7	7.2
12H	4H	6.1	6.4	6.6	6.8	7.3	6.1	6.4	6.6	6.8	7.3
	6H	6.0	6.2	6.5	6.7	7.2	6.1	6.3	6.5	6.7	7.2
	8H	6.0	6.2	6.5	6.7	7.2	6.0	6.2	6.5	6.7	7.2
Variations with the observer position at spacing:											
S =	1.0H	7.0 / -14.5					7.0 / -14.5				
	1.5H	9.8 / -14.7					9.8 / -14.7				
	2.0H	11.8 / -14.8					11.8 / -14.8				