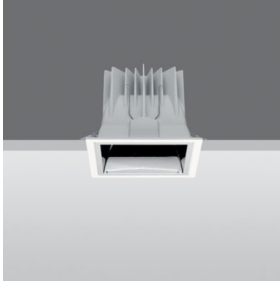


Last information update: May 2024

Product configuration: MC01

MC01: Square recessed luminaire - 144x144 mm H=111 mm - LED warm white - electronic ballast - general light optic with controlled luminance UGR<19

**Product code**MC01: Square recessed luminaire - 144x144 mm H=111 mm - LED warm white - electronic ballast - general light optic with controlled luminance UGR<19 **Attention! Code no longer in production****Technical description**

Recessed fixed square luminaire designed to use a LED lamp. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with 1100 lm LED unit in a warm white tone 3000K and electronic driver separate from the luminaire. General light distribution, with controlled luminance (UGR<19).

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 20 mm.

Colour

White / Aluminium (39)

Weight (Kg)

1

Mounting

ceiling recessed

Wiring

Product complete with electronic components

Complies with EN60598-1 and pertinent regulations




IP20

IP54

On the visible part of the product once installed



pending

**Technical data**

lm system:	967	CRI (minimum):	80
W system:	8.9	Colour temperature [K]:	3000
lm source:	1100	MacAdam Step:	3
W source:	6.7	Life Time LED 1:	50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	108.7	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	88	Number of optical assemblies:	1


Polar

Imax=1013 cd		C0-180		CIE		Lux	
90°	180°	90°	0°	nL 0.88		h	d1 d2 Em Emax
				93-100-100-100-88		1	1.1 1.1 742 1013
				UGR 16.6-16.6		2	2.2 2.2 185 253
				DIN A.61		3	3.3 3.3 82 113
				UTE 0.88A+0.00T		4	4.4 4.4 46 63
				F*1=930			
				F*1+F*2=999			
				F*1+F*2+F*3=1000			
				CIBSE LG3 L<1500 cd/m² at 65°			
				UGR<19 L<1500 cd/mq @65°			
α=58°							

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	77	72	69	66	71	68	68	64	73
1.0	81	76	73	71	75	73	72	69	79
1.5	86	82	80	78	81	79	78	75	86
2.0	89	86	84	83	85	83	82	80	91
2.5	90	89	87	86	87	86	85	82	94
3.0	92	90	89	88	89	88	87	84	96
4.0	93	92	91	90	90	89	88	86	98
5.0	93	93	92	91	91	90	89	87	99

Luminance curve limit

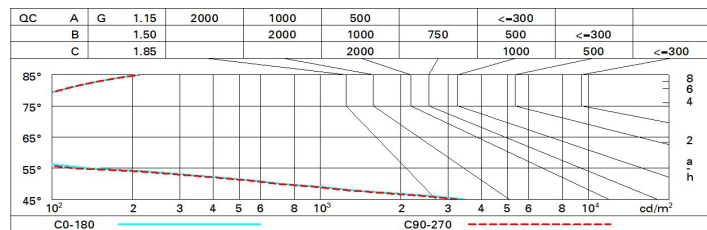

UGR diagram

Corrected UGR values (at 1100 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	17.2	17.8	17.4	18.0	18.3	17.2	17.8	17.4	18.0	18.3
	3H	17.0	17.6	17.3	17.9	18.1	17.0	17.6	17.3	17.9	18.1
	4H	17.0	17.5	17.3	17.8	18.1	16.9	17.5	17.3	17.8	18.1
	6H	16.9	17.4	17.2	17.7	18.0	16.9	17.4	17.2	17.7	18.0
	8H	16.8	17.3	17.2	17.6	18.0	16.8	17.3	17.2	17.6	18.0
	12H	16.8	17.2	17.2	17.6	17.9	16.8	17.2	17.2	17.6	17.9
4H	2H	17.0	17.5	17.3	17.8	18.1	16.9	17.5	17.3	17.8	18.1
	3H	16.8	17.2	17.2	17.6	17.9	16.8	17.2	17.2	17.6	17.9
	4H	16.7	17.1	17.1	17.5	17.9	16.7	17.1	17.1	17.5	17.8
	6H	16.6	17.0	17.1	17.4	17.8	16.6	17.0	17.0	17.4	17.8
	8H	16.6	16.9	17.0	17.3	17.7	16.6	16.9	17.0	17.3	17.7
	12H	16.5	16.8	17.0	17.2	17.7	16.5	16.8	17.0	17.2	17.7
8H	4H	16.6	16.9	17.0	17.3	17.7	16.6	16.9	17.0	17.3	17.7
	6H	16.5	16.7	17.0	17.2	17.7	16.5	16.7	16.9	17.2	17.7
	8H	16.4	16.7	16.9	17.1	17.6	16.4	16.6	16.9	17.1	17.6
	12H	16.4	16.6	16.9	17.1	17.6	16.4	16.6	16.9	17.0	17.6
12H	4H	16.5	16.8	17.0	17.2	17.7	16.5	16.8	17.0	17.2	17.7
	6H	16.4	16.7	16.9	17.1	17.6	16.4	16.6	16.9	17.1	17.6
	8H	16.4	16.6	16.9	17.1	17.6	16.4	16.6	16.9	17.0	17.6
Variations with the observer position at spacing:											
S =	1.0H	4.5 / -23.0					4.6 / -23.1				
	1.5H	6.1 / -24.6					6.2 / -24.6				
	2.0H	8.1 / -24.8					8.2 / -24.8				