


Collection of exterior bollards for commercial and institutional applications. Available in a round or square design with 3 mounting heights for diverse applications, scale and design. Robust aluminum alloy construction with stainless steel fasteners, factory sealed diffuser and lenses, with five layers corrosion resistant finish.




Luminaire characteristic:

Power input: 13W (system wattage)
Lumens: 1080lm to 1268lm (for 3000K, 80CRI)
Luminaire efficacy: Up to 97lm/W


Source:	White LED (LM-80), 3000K: 80CRI, 4000K: 80CRI.
Lumen maintenance:	80% of initial lumens at 79 000 hours (L80)
Optic:	360° symmetrical optic.
Material:	Body: Extruded aluminum Base: Die cast aluminum with stainless steel rods Diffuser: Opal white anti UV polycarbonate Hardware: Stainless steel screws
Mounting:	Install with fixing plate accessory or fasten to ground. Supplied with 3ft (1m) of the power cable minimum.
Electrical:	Integral high efficiency dimmable LED driver, rated at 50 000 hours. 120V-277V. (*10kV surge protection) (differential and common mode.)
Dimming:	0-10V (120-277V), down to 10%.
Finish:	Gray (RAL9007) painted finish with a high level of weather and UV resistance. The semi-gloss finish coating is electrostatically applied, durable acrylic enamel baked at high temperatures for superior color retentive finish.
Weight:	Small: 9.4lbs (4.3kg) Medium: 15.5lbs (7.02kg) Large: 21.8lbs (9.9kg)
Warranty:	5 year limited warranty.
Ratings:	IP66, IK10
Certification:	 cULus listed for wet location.

DIMENSIONS

ROUND



SQUARE




TOP VIEW

SMALL

MEDIUM

LARGE

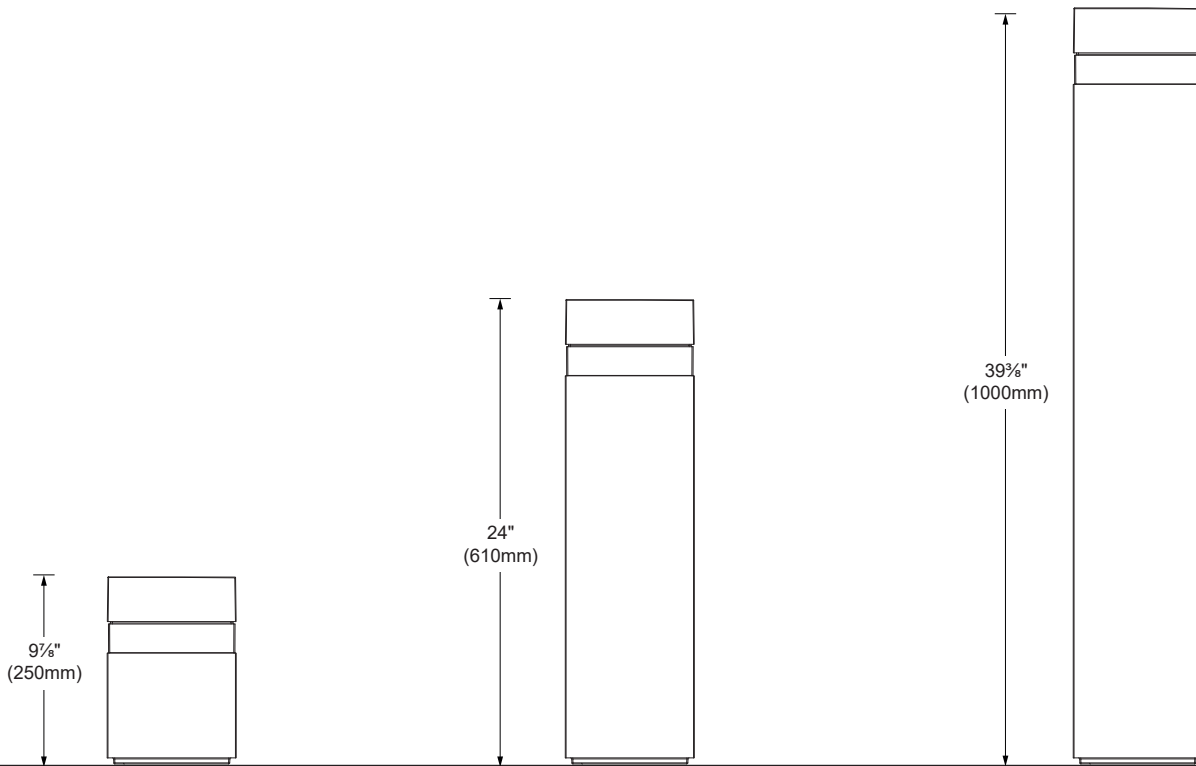

SIDE VIEW



PHOTOMETRIC DATA

RD - ROUND SYMMETRICAL - 360° (SC)



CCT (K)*	LOAD (W)	LUMENS (lm)	EFFICACY (lm/w)	MAX CANDELA (cd)	B.U.G.	MODELS
3000K	13	1 180	90	384	B1 - U2 - G2	IWAY-X-RD-830-SYM
4000K	13	1 268	97	412	B1 - U3 - G2	IWAY-X-RD-840-SYM

Symmetrical 360° (3000K, 80CRI)

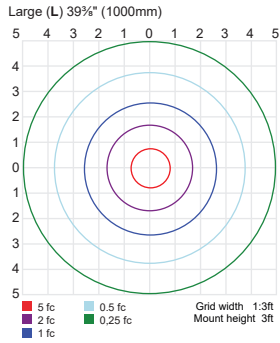



SQ - SQUARE SYMMETRICAL - 360° (SC)



CCT (K)*	LOAD (W)	LUMENS (lm)	EFFICACY (lm/w)	MAX CANDELA (cd)	B.U.G.	MODELS
3000K	13	1 080	83	377	B1 - U3 - G2	IWAY-X-SQ-830-SYM
4000K	13	1 161	89	405	B1 - U3 - G2	IWAY-X-SQ-840-SYM

Symmetrical 360° (3000K, 80CRI)



ACCESSORIES (TO BE ORDERED SEPARATELY)

For installation consult instruction sheet.

SCREEN

- X087** - Satin-finished screen for round model
- X088** - Satin-finished screen for square model



FIXING PLATE

- B513** - Fixing plate with anchor bolts
A: 7¹⁵/₁₆" (201mm)
B: 6" (153mm)



SCREEN FOR ASYMMETRICAL

- X023** - Black screen for asymmetrical 180° emission for round model
- X024** - Black screen for asymmetrical 180° emission for square model




WATERPROOF CONNECTOR (IP68):

- X564** - Male connector (5 Conductors)
- X565** - Female connector (5 Conductors)
- X567** - Male / female connector (5 Conductors)

SINGLE CONNECTION

MULTIPLE CONNECTION

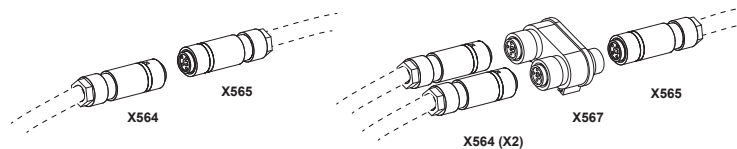

ORDERING INFO

IWAY - - - - **SYM - UNV - 15 - D10**
FIXTURE

MODEL

- S** - Small 9⁷/₈" (250mm)
- M** - Medium 24" (610mm)
- L** - Large 39³/₈" (1000mm)

SHAPE

- RD** - Round
- SQ** - Square

LED

- 830** - 3000K, 80CRI
- 840** - 4000K, 80CRI

OPTIC

- SYM** - Symmetrical 360°

VOLTAGE

- UNV** - 120-277V

FINISH

- 15** - Gray

DIMMING

- D10** - 0-10V (down to 10%)