


Last information update: April 2024

Product configuration: N075.Y

N075.Y: adjustable luminaire - Ø 96 mm - neutral white - medium optic - frame

**Product code**

N075.Y: adjustable luminaire - Ø 96 mm - neutral white - medium optic - frame

Technical description

Round adjustable luminaire designed to use an LED lamp with C.O.B. technology in a neutral white colour tone 4,000K (CRI 80). Version with rim for surface-mounting. Painted, die-cast aluminium body. Lower reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Anodised aluminium upper reflector. Black, zinc-plated sheet steel bracket. The luminaire can be rotated 30° relative to the horizontal plane and 358° about the vertical axis. The luminaire is fitted with mechanical locks for light beam aiming. Painted extruded aluminium dissipater.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 25 mm.

Colour

White / Aluminium (39)

Weight (Kg)

0.49

Mounting

ceiling recessed

Wiring

Product complete with DALI components

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	917	CRI (minimum):	80
W system:	16.1	Colour temperature [K]:	4000
lm source:	2000	MacAdam Step:	2
W source:	14	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	57	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	46	Number of optical assemblies:	1
Beam angle [°]:	25°	Control:	DALI-2


Polar

	CIE nL 0.46 99-100-100-100-46 UGR <10-10					Lux								
	DIN A.61					h	d1	d2	Em	Emax				
	UTE 0.46A+0.00T F*1=995 F*1+F*2=1000 F*1+F*2+F*3=1000					2	0.9	0.9	788	1046				
	CIBSE LG3 L<1500 cd/m² at 65° UGR<10 L<1500 cd/mq @65°					4	1.8	1.8	197	261				
						6	2.7	2.7	88	116				
												8	3.5	3.5
$\alpha=25^\circ$														

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	41	39	38	37	39	37	37	36	78
1.0	43	41	40	39	41	40	39	38	83
1.5	45	44	43	42	43	42	42	41	88
2.0	47	46	45	44	45	44	44	43	93
2.5	48	47	46	46	46	46	45	44	96
3.0	48	48	47	47	47	46	46	45	98
4.0	49	48	48	48	48	47	47	46	99
5.0	49	49	48	48	48	48	47	46	100

Luminance curve limit

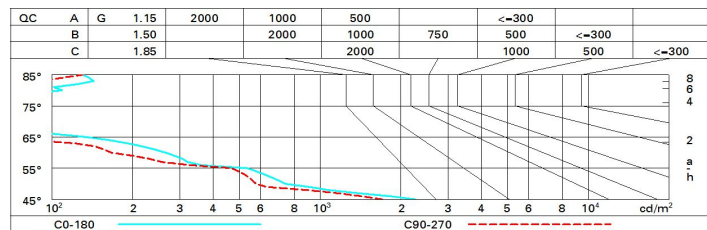

UGR diagram

Corrected UGR values (at 2000 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	1.4	3.5	1.7	3.8	4.2	1.0	3.2	1.4	3.5	3.8
	3H	1.2	2.9	1.6	3.2	3.6	0.9	2.6	1.3	2.9	3.2
	4H	1.2	2.5	1.5	2.9	3.2	0.8	2.2	1.2	2.6	2.9
	6H	1.1	2.2	1.5	2.5	2.9	0.8	1.8	1.2	2.2	2.5
	8H	1.1	2.1	1.5	2.5	2.8	0.7	1.8	1.1	2.1	2.5
	12H	1.0	2.1	1.4	2.4	2.8	0.7	1.7	1.1	2.1	2.5
4H	2H	1.2	2.6	1.5	2.9	3.2	0.8	2.2	1.2	2.5	2.9
	3H	1.0	2.1	1.4	2.4	2.8	0.7	1.7	1.1	2.1	2.5
	4H	0.9	1.9	1.4	2.3	2.7	0.6	1.6	1.0	1.9	2.4
	6H	0.6	2.3	1.0	2.7	3.2	0.2	1.9	0.7	2.4	2.8
	8H	0.4	2.3	0.9	2.8	3.3	0.1	2.0	0.6	2.5	3.0
	12H	0.3	2.3	0.8	2.8	3.3	-0.0	2.0	0.5	2.4	3.0
8H	4H	0.4	2.3	0.9	2.8	3.3	0.1	2.0	0.6	2.5	3.0
	6H	0.3	2.1	0.8	2.6	3.2	-0.0	1.8	0.5	2.3	2.8
	8H	0.3	1.9	0.8	2.4	3.0	-0.0	1.6	0.5	2.1	2.6
	12H	0.5	1.5	1.0	2.0	2.6	0.1	1.2	0.6	1.7	2.2
12H	4H	0.3	2.3	0.8	2.8	3.3	-0.0	2.0	0.5	2.5	3.0
	6H	0.3	1.9	0.8	2.4	3.0	-0.0	1.6	0.5	2.1	2.6
	8H	0.4	1.5	1.0	2.0	2.6	0.1	1.2	0.6	1.7	2.2
Variations with the observer position at spacing:											
S =	1.0H	3.9 / -8.6					4.4 / -9.8				
	1.5H	6.7 / -13.5					7.2 / -11.8				
	2.0H	8.6 / -13.5					9.2 / -14.1				