


## Front Light

Design iGuzzini

iGuzzini

Last information update: May 2024

**Product configuration: M925+L360**  
M925: 35W HIT- Flood



### Product code

M925: 35W HIT- Flood **Attention! Code no longer in production**

### Technical description

Adjustable spotlight with adapter for installation on a mains voltage track. Luminaire made of die-cast aluminium. Spotlight double adjustability allows a 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. Mechanical aiming locks both for rotation about the vertical axis and tilting relative to the horizontal plane. Equipped with electronic ballast. An external component may be applied, such as directional flaps with 360° rotation and which can be fully closed. Luminaire supplied with flood optic 35W HIT GU6.5IP 40 on the optical assembly.

### Installation

Installation on electrified tracks.

### Colour

White (01) | Black (04) | Grey / Black (74)

### Mounting

three circuit track

### Wiring

Electronic components for discharge lamp housed in the body


Complies with EN60598-1 and pertinent regulations




### Technical data

lm system:	2998.7	CRI:	87
W system:	39	Colour temperature [K]:	3000
lm source:	3900	Voltage [Vin]:	230
W source:	35	Lamp code:	L360
Luminous efficiency (lm/W, real value):	76.9	Socket:	GU6,5
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	HIT-CE
Light Output Ratio (L.O.R.) [%]:	77	Number of optical assemblies:	1
Beam angle [°]:	30°		

### Polar

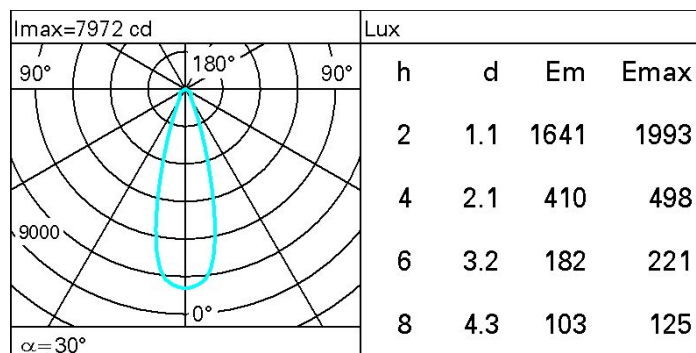

### Isolux

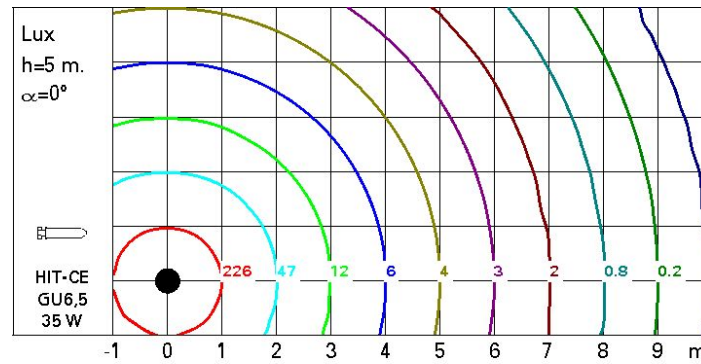

### UGR diagram

Corrected UGR values (at 3900 lm bare lamp luminous flux)												
Reflect.:		viewed crosswise					viewed endwise					
ceiling		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	
Room dim												
x	y											
2H	2H	22.1	22.7	22.3	23.0	23.2	22.1	22.7	22.3	23.0	23.2	
	3H	22.0	22.6	22.3	22.9	23.1	22.1	22.8	22.5	23.0	23.3	
	4H	21.9	22.5	22.2	22.8	23.1	22.1	22.7	22.4	23.0	23.3	
	6H	21.8	22.4	22.2	22.7	23.0	22.0	22.5	22.4	22.9	23.2	
	8H	21.8	22.3	22.2	22.6	23.0	22.0	22.5	22.3	22.8	23.2	
	12H	21.8	22.3	22.1	22.6	23.0	21.9	22.4	22.3	22.8	23.1	
4H	2H	22.1	22.7	22.4	23.0	23.3	21.9	22.5	22.2	22.8	23.1	
	3H	22.0	22.5	22.4	22.8	23.2	22.0	22.5	22.4	22.8	23.2	
	4H	21.9	22.4	22.3	22.7	23.1	21.9	22.4	22.3	22.7	23.1	
	6H	21.9	22.2	22.3	22.6	23.1	21.9	22.2	22.3	22.6	23.1	
	8H	21.8	22.2	22.3	22.6	23.0	21.8	22.2	22.3	22.6	23.0	
	12H	21.8	22.1	22.2	22.5	23.0	21.8	22.1	22.2	22.5	23.0	
8H	4H	21.8	22.2	22.3	22.6	23.0	21.8	22.2	22.3	22.6	23.0	
	6H	21.7	22.0	22.2	22.5	22.9	21.7	22.0	22.2	22.5	22.9	
	8H	21.7	21.9	22.2	22.4	22.9	21.7	21.9	22.2	22.4	22.9	
	12H	21.6	21.9	22.1	22.3	22.9	21.6	21.9	22.1	22.3	22.9	
12H	4H	21.8	22.1	22.2	22.5	23.0	21.8	22.1	22.2	22.5	23.0	
	6H	21.7	21.9	22.2	22.4	22.9	21.7	21.9	22.2	22.4	22.9	
	8H	21.6	21.9	22.1	22.3	22.9	21.6	21.9	22.1	22.3	22.9	
Variations with the observer position at spacing:												
S =		1.0H	1.2 / -1.6				1.2 / -1.6					
		1.5H	2.9 / -8.3				2.9 / -8.3					
		2.0H	4.2 / -10.1				4.2 / -10.1					