


Polar

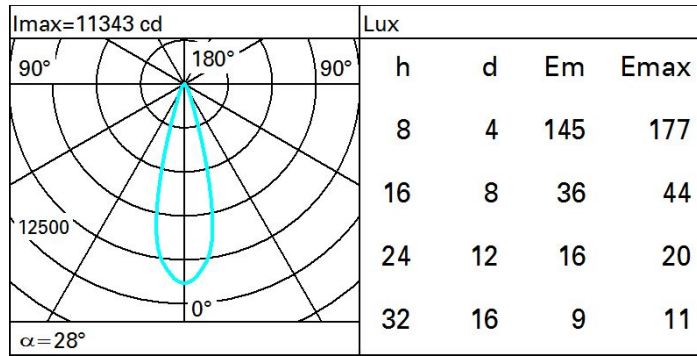

Isolux

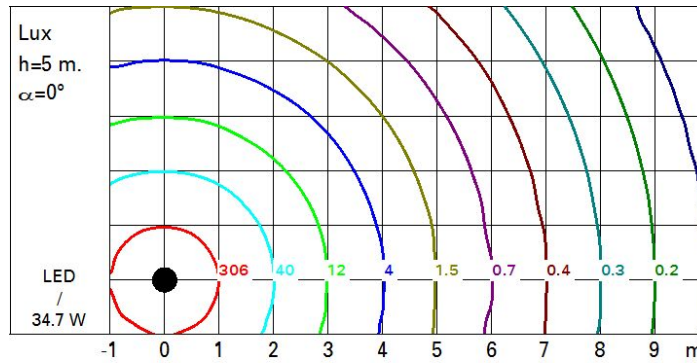


Diagrama UGR

Corrected UGR values (at 4100 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceil/cav	walls	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
work pl.	Room dim	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
x	y	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	14.1	16.0	14.5	16.3	16.7	14.1	16.0	14.5	16.3	16.7
	3H	14.4	15.9	14.8	16.2	16.6	14.2	15.7	14.6	16.0	16.4
	4H	14.5	15.7	14.9	16.1	16.4	14.2	15.5	14.6	15.8	16.2
	6H	14.5	15.5	14.8	15.8	16.2	14.2	15.2	14.6	15.6	15.9
	8H	14.4	15.4	14.8	15.8	16.1	14.2	15.2	14.6	15.5	15.9
	12H	14.4	15.3	14.8	15.7	16.1	14.1	15.1	14.5	15.5	15.9
4H	2H	14.2	15.5	14.6	15.8	16.2	14.5	15.7	14.9	16.1	16.4
	3H	14.7	15.7	15.1	16.0	16.4	14.7	15.7	15.1	16.0	16.4
	4H	14.7	15.7	15.2	16.0	16.4	14.7	15.7	15.2	16.0	16.4
	6H	14.4	16.0	14.9	16.4	16.9	14.5	16.0	14.9	16.4	16.9
	8H	14.3	16.0	14.8	16.5	17.0	14.3	16.1	14.8	16.5	17.0
	12H	14.2	16.0	14.7	16.5	17.0	14.2	16.0	14.7	16.5	17.0
8H	4H	14.3	16.1	14.8	16.5	17.0	14.3	16.0	14.8	16.5	17.0
	6H	14.3	15.9	14.8	16.4	16.9	14.3	15.9	14.8	16.4	16.9
	8H	14.2	15.7	14.8	16.2	16.7	14.2	15.7	14.8	16.2	16.7
	12H	14.3	15.4	14.9	15.9	16.4	14.3	15.4	14.9	15.9	16.4
12H	4H	14.2	16.0	14.7	16.5	17.0	14.2	16.0	14.7	16.5	17.0
	6H	14.2	15.7	14.8	16.2	16.7	14.2	15.7	14.8	16.2	16.7
	8H	14.3	15.4	14.9	15.9	16.4	14.3	15.4	14.9	15.9	16.4
Variations with the observer position at spacing:											
S =	1.0H	2.0 / -1.7					2.0 / -1.7				
	1.5H	3.9 / -2.6					3.9 / -2.6				
	2.0H	5.7 / -3.5					5.7 / -3.5				