Palco InOut

Design Artec Studio | **iGuzzini**

Last information update: March 2025

Product configuration: Q726
Q726: Spotlight with base - Neutral White Led - integrated electronic control gear - Spot optic

Product code
Q726: Spotlight with base - Neutral White Led - integrated electronic control gear - Spot optic

Technical description
Spotlight designed to use LED lamps and a Spot optic. The optical assembly and base is made of EN1706AC 46100LF aluminium alloy and subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The following painting stage consists of a primer and a liquid acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. 5 mm thick tempered sodium-calcium closing glass. Double adjustability allows a 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. Mechanical aiming locks for rotation on both the vertical axis and horizontal plane. Complete with a monochrome LED circuit and an Opti Beam Lens optic system. The product includes a PG13.5 cable gland. Electronic DALI ballast integrated in product. Option of using optic accessories assembled via an accessory holder frame. All external screws used are made of A2 stainless steel.

Installation
Floor, wall, ceiling or ground-installed via pole or stake.



Colour
White (01) | Black (04) | Grey (15) | Rust Brown (F5)

Weight (Kg)
3.85

Mounting
wall surface|ground spike

Wiring
Double PG.

Complies with EN60598-1 and pertinent regulations

IK07 IP66

Technical data

lm system:	1456
W system:	14.3
lm source:	1820
W source:	12
Luminous efficiency (lm/W, real value):	101.8
lm in emergency mode:	-
Total light flux at or above an angle of 90° [Lm]:	0
Light Output Ratio (L.O.R.) [%]:	80
Beam angle [°]:	13°
CRI (minimum):	80
Colour temperature [K]:	4000
MacAdam Step:	2
Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)

Life Time LED 2:	100,000h - L90 - B10 (Ta 40°C)
Lamp code:	LED
Number of lamps for optical assembly:	1
ZVEI Code:	LED
Number of optical assemblies:	1
Intervallo temperatura ambiente:	from -20°C to 50°C.
Lifetime of product at ambient operating temperature:	≥ 50.000h Ta=40°C
Power factor:	See installation instructions
Inrush current:	5 A / 220 µs
Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 81 luminaires B16A: 130 luminaires C10A: 135 luminaires C16A: 221 luminaires
Minimum dimming %:	1
Control:	DALI-2

Polar

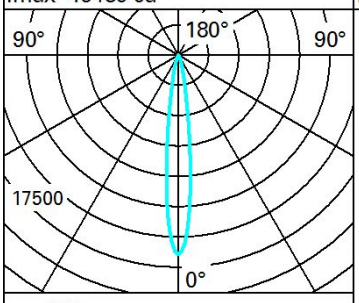

Lux

h	d	Em	Emax
10	2.4	127	164
20	4.7	32	41
30	7.1	14	18
40	9.4	8	10

Isolux

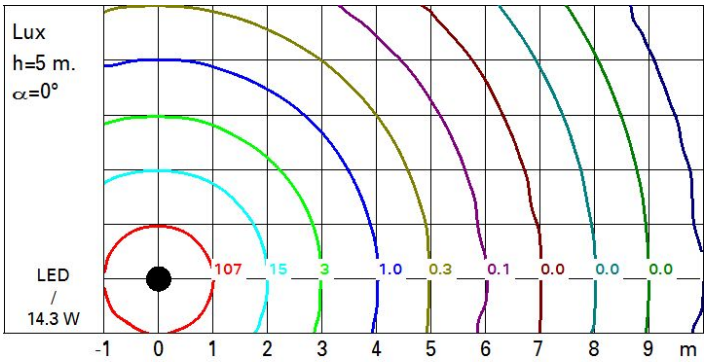

UGR diagram

Corrected UGR values (at 1820 lm bare lamp luminous flux)

Riflect.:											
ceil/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	6.3	8.3	6.7	8.7	9.0	6.3	8.3	6.7	8.7	9.0
	3H	6.2	7.6	6.6	7.9	8.2	6.3	7.6	6.6	7.9	8.2
	4H	6.2	7.2	6.5	7.5	7.9	6.2	7.3	6.6	7.6	7.9
	6H	6.1	6.9	6.5	7.2	7.6	6.2	6.9	6.5	7.3	7.6
	8H	6.1	6.9	6.5	7.2	7.6	6.1	6.9	6.5	7.3	7.6
	12H	6.0	6.9	6.4	7.3	7.6	6.0	6.9	6.4	7.3	7.7
4H	2H	6.2	7.3	6.6	7.6	7.9	6.2	7.2	6.5	7.5	7.9
	3H	6.0	6.9	6.4	7.3	7.7	6.0	6.9	6.4	7.3	7.7
	4H	5.8	7.0	6.3	7.4	7.8	5.8	7.0	6.3	7.4	7.8
	6H	5.5	7.2	6.0	7.7	8.1	5.5	7.2	6.0	7.7	8.1
	8H	5.4	7.3	5.9	7.7	8.2	5.4	7.3	5.9	7.7	8.2
	12H	5.3	7.2	5.8	7.7	8.2	5.3	7.2	5.8	7.7	8.2
8H	4H	5.4	7.3	5.9	7.7	8.2	5.4	7.3	5.9	7.7	8.2
	6H	5.3	7.0	5.8	7.4	8.0	5.3	7.0	5.8	7.4	8.0
	8H	5.3	6.7	5.9	7.2	7.7	5.3	6.7	5.9	7.2	7.7
	12H	5.5	6.3	6.0	6.8	7.3	5.5	6.3	6.0	6.8	7.3
12H	4H	5.3	7.2	5.8	7.7	8.2	5.3	7.2	5.8	7.7	8.2
	6H	5.3	6.7	5.9	7.2	7.7	5.3	6.7	5.9	7.2	7.7
	8H	5.5	6.3	6.0	6.8	7.3	5.5	6.3	6.0	6.8	7.3

Variations with the observer position at spacing:

S =	1.0H	3.3 / -7.4	3.3 / -7.4
	1.5H	5.9 / -14.1	5.9 / -14.1
	2.0H	7.9 / -23.9	7.9 / -23.9