


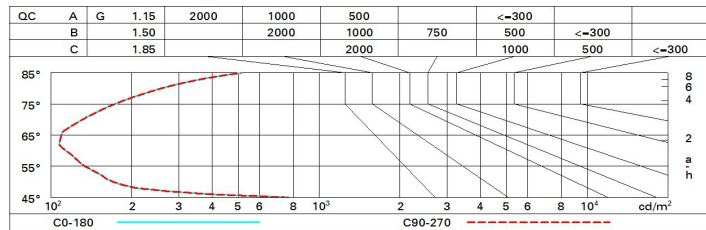

**Coefficientes de uso**

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	68	65	78
1.0	78	75	72	70	74	72	71	69	83
1.5	82	80	77	76	79	77	76	74	89
2.0	85	83	81	80	82	80	79	77	93
2.5	86	85	84	83	84	83	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	88	87	87	85	83	100

**Curva límite de luminancia**



**Diagrama UGR**

Corrected UGR values (at 1800 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceil/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	7.1	7.6	7.4	7.8	8.0	7.1	7.6	7.4	7.8	8.0
	3H	7.0	7.4	7.3	7.7	7.9	7.0	7.4	7.3	7.7	7.9
	4H	6.9	7.3	7.2	7.6	7.9	6.9	7.3	7.2	7.6	7.9
	6H	6.8	7.2	7.2	7.5	7.8	6.8	7.2	7.2	7.5	7.8
	8H	6.8	7.2	7.2	7.5	7.8	6.8	7.2	7.2	7.5	7.8
12H	6.8	7.1	7.1	7.4	7.8	6.8	7.1	7.1	7.4	7.8	
4H	2H	6.9	7.3	7.2	7.6	7.9	6.9	7.3	7.2	7.6	7.9
	3H	6.8	7.1	7.1	7.4	7.8	6.8	7.1	7.1	7.4	7.8
	4H	6.7	7.0	7.1	7.3	7.7	6.7	7.0	7.1	7.3	7.7
	6H	6.6	6.9	7.0	7.2	7.7	6.6	6.8	7.0	7.2	7.7
	8H	6.5	6.8	7.0	7.2	7.6	6.5	6.8	7.0	7.2	7.6
12H	6.5	6.7	7.0	7.2	7.6	6.5	6.7	6.9	7.1	7.6	
8H	4H	6.5	6.8	7.0	7.2	7.6	6.5	6.8	7.0	7.2	7.6
	6H	6.4	6.6	6.9	7.1	7.6	6.5	6.7	6.9	7.1	7.6
	8H	6.4	6.6	6.9	7.0	7.5	6.4	6.6	6.9	7.0	7.5
	12H	6.4	6.5	6.9	7.0	7.5	6.3	6.5	6.8	7.0	7.5
12H	4H	6.5	6.7	6.9	7.1	7.6	6.5	6.7	7.0	7.2	7.6
	6H	6.4	6.6	6.9	7.0	7.5	6.4	6.6	6.9	7.0	7.5
	8H	6.3	6.5	6.8	7.0	7.5	6.4	6.5	6.9	7.0	7.5
Variations with the observer position at spacing:											
S =	1.0H	7.0 / -14.5				7.0 / -14.5					
	1.5H	9.8 / -14.7				9.8 / -14.7					
	2.0H	11.8 / -14.8				11.8 / -14.8					