


Last information update: April 2024

**Product configuration: Q961**

Q961: Fixed circular recessed luminaire - Ø 96 mm - warm white - white optic - DALI

**Product code**

Q961: Fixed circular recessed luminaire - Ø 96 mm - warm white - white optic - DALI

**Technical description**

Fixed round luminaire designed to use a LED lamp with C.O.B. technology. Version with rim for surface-mounting. Reflector painted white with a layer of anti-scratch protection. Die-cast aluminium body and passive dissipation system. Product complete with LED lamp in warm white colour tone (2700K). General lighting beam.

**Installation**

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 20 mm.

**Weight (Kg)**

0.65

**Mounting**

ceiling recessed

**Wiring**

product complete with DALI components

Complies with EN60598-1 and pertinent regulations



IP20

IP54

**Technical data**

lm system:	1015	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W system:	14.1	Lamp code:	LED
lm source:	1550	Number of lamps for optical assembly:	1
W source:	12	ZVEI Code:	LED
Luminous efficiency (lm/W, real value):	72	Number of optical assemblies:	1
lm in emergency mode:	-	Power factor:	See installation instructions
Total light flux at or above an angle of 90° [Lm]:	0	Inrush current:	16 A / 220 µs
Light Output Ratio (L.O.R.) [%]:	65	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 15 luminaires B16A: 24 luminaires C10A: 24 luminaires C16A: 40 luminaires
Beam angle [°]:	74°	Overvoltage protection:	2kV Common mode & 1kV Differential mode
CRI (minimum):	90	Dimming mode:	PWM
Colour temperature [K]:	2700	Control:	DALI
MacAdam Step:	2		


**Polar**

Imax=744 cd		CIE		Lux			
h	d	Em	Emax				
1	1.5	503	744				
2	3	126	186				
3	4.5	56	83				
4	6	31	47				

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	52	47	44	41	46	43	43	40	61
1.0	55	51	48	45	50	47	47	44	67
1.5	60	57	54	52	56	53	53	50	76
2.0	63	60	58	56	59	57	57	54	82
2.5	65	63	61	59	61	60	59	57	86
3.0	66	64	63	61	63	62	61	58	89
4.0	67	66	65	64	65	64	63	60	92
5.0	68	67	66	65	66	65	64	62	94

# Luminance curve limit

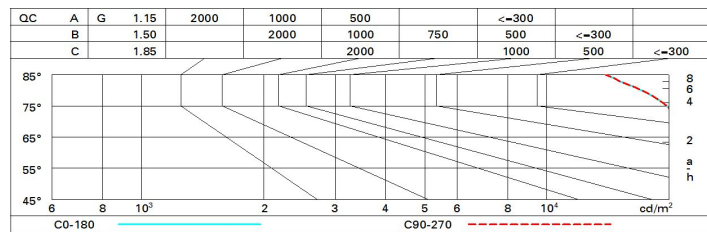

# UGR diagram

Corrected UGR values (at 1550 lm bare lamp luminous flux)											
Reflect.: ceil/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	22.6	23.5	22.9	23.7	24.0	22.6	23.5	22.9	23.7	24.0
	3H	23.5	24.3	23.8	24.6	24.9	22.8	23.6	23.2	23.9	24.2
	4H	23.9	24.6	24.2	24.9	25.2	22.9	23.7	23.3	24.0	24.3
	6H	24.2	24.9	24.6	25.2	25.5	22.9	23.6	23.3	23.9	24.3
	8H	24.3	25.0	24.7	25.3	25.6	22.9	23.6	23.3	23.9	24.3
	12H	24.3	25.0	24.7	25.3	25.7	22.9	23.5	23.3	23.9	24.2
4H	2H	22.9	23.7	23.3	24.0	24.3	23.9	24.6	24.2	24.9	25.2
	3H	24.0	24.7	24.4	25.0	25.4	24.3	25.0	24.7	25.3	25.7
	4H	24.6	25.1	25.0	25.5	25.9	24.6	25.1	25.0	25.5	25.9
	6H	25.0	25.5	25.4	25.9	26.3	24.7	25.2	25.1	25.6	26.0
	8H	25.1	25.6	25.6	26.0	26.4	24.8	25.2	25.2	25.6	26.1
	12H	25.2	25.6	25.7	26.0	26.5	24.7	25.2	25.2	25.6	26.1
8H	4H	24.8	25.2	25.2	25.6	26.1	25.1	25.6	25.6	26.0	26.4
	6H	25.3	25.7	25.8	26.1	26.6	25.4	25.8	25.9	26.2	26.7
	8H	25.5	25.8	26.0	26.3	26.8	25.5	25.8	26.0	26.3	26.8
	12H	25.6	25.9	26.1	26.4	26.9	25.6	25.8	26.1	26.3	26.8
12H	4H	24.7	25.2	25.2	25.6	26.1	25.2	25.6	25.7	26.0	26.5
	6H	25.3	25.7	25.8	26.1	26.6	25.5	25.8	26.0	26.3	26.8
	8H	25.6	25.8	26.1	26.3	26.8	25.6	25.9	26.1	26.4	26.9
Variations with the observer position at spacing:											
S =	1.0H	0.9 / -0.6					0.9 / -0.6				
	1.5H	1.8 / -0.9					1.8 / -0.9				
	2.0H	3.0 / -1.1					3.0 / -1.1				