


Last information update: May 2024

Product configuration: MC29

MC29: Square recessed luminaire - 226x226 mm H=146 mm - neutral white - electronic ballast - general light optic with controlled luminance UGR<19

**Product code**MC29: Square recessed luminaire - 226x226 mm H=146 mm - neutral white - electronic ballast - general light optic with controlled luminance UGR<19 **Attention! Code no longer in production****Technical description**

Recessed fixed square luminaire designed to use a LED lamp. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with 3000 lm LED unit in a neutral white tone 4000K and electronic driver separate from the luminaire. General light distribution, with controlled luminance (UGR<19).

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 25 mm.

Colour

White / Aluminium (39)

Weight (Kg)

2.34

Mounting

ceiling recessed

Wiring

Product complete with electronic components


Complies with EN60598-1 and pertinent regulations




IP20

IP23

On the visible part of the product once installed

**Technical data**


lm system:	2729	CRI:	80
W system:	26.5	Colour temperature [K]:	4000
lm source:	3000	MacAdam Step:	3
W source:	23	Life Time LED 1:	50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	103	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	91	Number of optical assemblies:	1

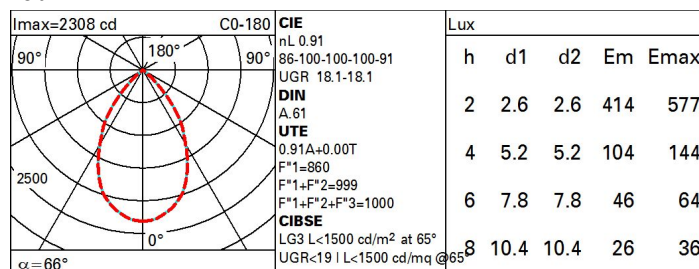Polar

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	76	71	67	64	70	66	66	62	68
1.0	81	76	72	69	75	71	71	67	74
1.5	87	83	80	78	82	79	78	75	83
2.0	90	88	85	83	86	84	83	80	88
2.5	92	90	88	87	89	87	86	83	92
3.0	94	92	91	89	90	89	88	85	94
4.0	95	94	93	92	92	91	90	87	96
5.0	96	95	94	93	93	92	91	88	97

Luminance curve limit

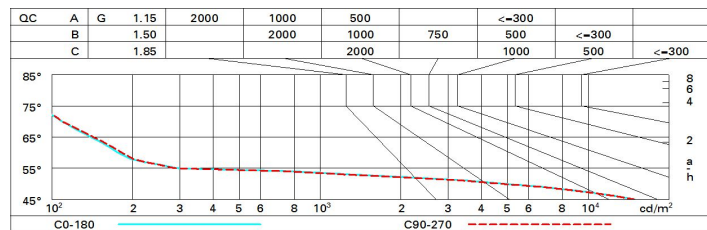

UGR diagram

Corrected UGR values (at 3000 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	18.6	19.4	18.9	19.6	19.8	18.6	19.4	18.9	19.6	19.8
	3H	18.5	19.1	18.8	19.4	19.7	18.5	19.2	18.8	19.4	19.7
	4H	18.4	19.0	18.8	19.3	19.6	18.4	19.0	18.8	19.3	19.6
	6H	18.3	18.9	18.7	19.2	19.5	18.4	18.9	18.7	19.2	19.6
	8H	18.3	18.8	18.7	19.2	19.5	18.3	18.9	18.7	19.2	19.5
	12H	18.3	18.8	18.6	19.1	19.5	18.3	18.8	18.7	19.1	19.5
4H	2H	18.4	19.0	18.8	19.3	19.6	18.4	19.0	18.7	19.3	19.6
	3H	18.3	18.8	18.7	19.1	19.5	18.3	18.8	18.7	19.1	19.5
	4H	18.2	18.6	18.6	19.0	19.4	18.2	18.6	18.6	19.0	19.4
	6H	18.1	18.5	18.5	18.9	19.3	18.1	18.5	18.5	18.9	19.3
	8H	18.1	18.4	18.5	18.8	19.3	18.1	18.4	18.5	18.8	19.3
	12H	18.0	18.3	18.5	18.8	19.2	18.0	18.3	18.5	18.8	19.2
8H	4H	18.1	18.4	18.5	18.8	19.3	18.1	18.4	18.5	18.8	19.3
	6H	18.0	18.3	18.5	18.7	19.2	18.0	18.3	18.4	18.7	19.2
	8H	17.9	18.2	18.4	18.6	19.1	17.9	18.2	18.4	18.6	19.1
	12H	17.9	18.1	18.4	18.6	19.1	17.9	18.1	18.4	18.6	19.1
12H	4H	18.0	18.3	18.5	18.8	19.2	18.0	18.3	18.5	18.8	19.2
	6H	17.9	18.2	18.4	18.6	19.1	17.9	18.2	18.4	18.6	19.1
	8H	17.9	18.1	18.4	18.6	19.1	17.9	18.1	18.4	18.6	19.1
Variations with the observer position at spacing:											
S =	1.0H	2.9 / -18.5					2.9 / -18.7				
	1.5H	4.3 / -25.8					4.3 / -25.6				
	2.0H	6.2 / -26.6					6.3 / -26.4				