

Agorà

Design Jean-Michel
Wilmotte

iGuzzini

Last information update: April 2025

Product configuration: 2750

2750: Spotlight with bracket - RGBW - Integrated control card - Remote power supply - Wall Washer optic



Product code

2750: Spotlight with bracket - RGBW - Integrated control card - Remote power supply - Wall Washer optic

Technical description

Spotlight designed to use RGBW (Red Green Blue White 3000K) LED lamps, a Wall Washer optic and a DMX512-RDM control. Consists of a die-cast aluminium optical assembly, bracket and box for the power supply with a clear tempered sodium-calcium safety glass cover. The luminaire is fitted with a double cable gland for pass-through wiring. The optical assembly can be adjusted on a horizontal plane at an angle between -50° / +90°. Agorà is fitted with a graduated scale and mechanical locking device for positioning. The optical system is Opti Beam Lens. The power supply is remote whereas the DMX control card is integrated in the product. Both indoor (diffuser glass covers, lamellar louvers and refractors for elliptical light) and outdoor accessories (cylindrical screens, visors and protective grilles) can be used. All external screws used are made of A2 stainless steel.

Installation

Floor, ceiling or wall-mounted installation.

Colour

White (01) | Black (04) | Grey (15) | Rust Brown (F5)


Weight (Kg)

9.35

Wiring

Double PG.


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	3106	Life Time LED 1:	100,000h - L80 - B10 (Ta 25°C)
W system:	60.6	Life Time LED 2:	88,000h - L80 - B10 (Ta 40°C)
Im source:	5450	Lamp code:	LED
W source:	53	Number of lamps for optical assembly:	1
Luminous efficiency (lm/W, real value):	51.3	ZVEI Code:	LED
Im in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Intervallo temperatura ambiente:	from -30°C to 50°C.
Light Output Ratio (L.O.R.) [%]:	57	LED current [mA]:	260
CRI (typical):	82	Control:	DMX-RDM
Colour temperature [K]:	RGBW - 3000K		

Polar

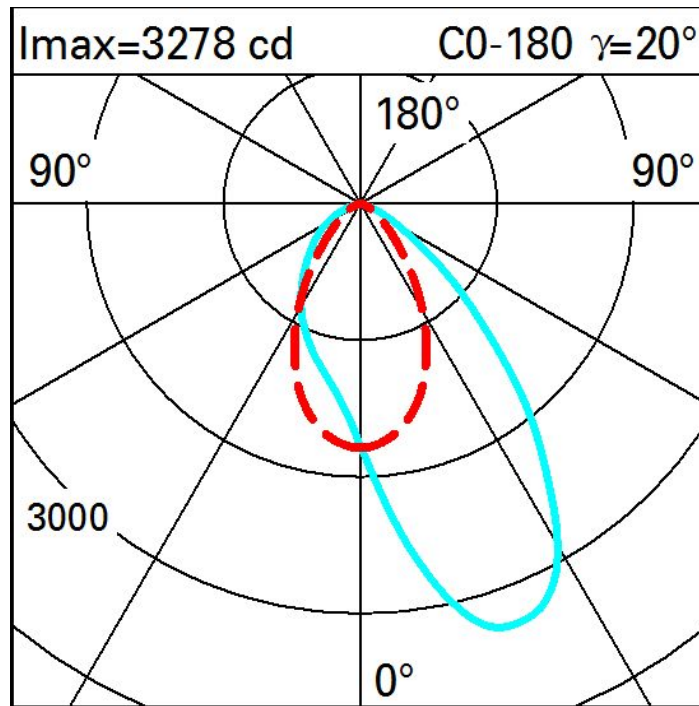

Illuminances

Lux													Wall distance = 1m	
3														
	0.1	0.6	3	14	59	118	59	14	3	0.6	0.1			
2	2	5	16	61	230	424	230	61	16	5	2			
	4	10	31	104	283	433	283	104	31	10	4			
1	6	15	40	111	224	297	224	111	40	15	6			
	8	19	44	90	146	177	146	90	44	19	8			
0														
	m	-2	-1	0	1	2	3							