

Product configuration: EY65.15**Product code**

Technical description



Installation

Accessories are available for installation, like adjustable AISI304 stainless steel wall-mounted arms.

Colour

Grey (15)

Weight (Kg)

2.6

Mounting

mounting
wall arm|wall surface|ceiling surface


Wiring

Complete with DMX-RDM control card and a 220-240V ac electronic ballast. The product is supplied with a nickel-plated brass PG11 double cable gland with H07RN-F 5x1, 5mm² rubber outlet cables for pass-through wiring with male and female IP68 connectors. Available for electrical connection and DMX-RDM control: IP68 5-pin female connector, IP68 5-pin male connector + closing cap (BZ16), and IP68 5-pin male + female connectors.

Notes

Complete with DMX-RDM control card and a 220-240V ac electronic ballast. Product complete with LED lamp. DMX specifications require the insertion of a 120 Ohm terminating resistor to be placed between the DATA+ and DATA- cables of the last product in the line (BZQ7).


Complies with EN60598-1 and pertinent regulations

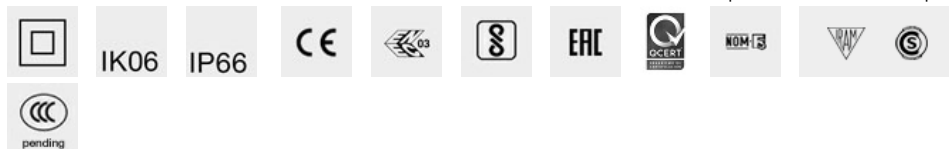

Technical data

Im system:	2268	MacAdam Step:	3
W system:	39.2	Life Time LED 1:	100,000h - L80 - B10 (Ta 25°C)
Im source:	4200	Life Time LED 2:	100,000h - L80 - B10 (Ta 40°C)
W source:	31	Voltage [Vin]:	230
Luminous efficiency (Im/W, real value):	57.9	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	54	Number of optical assemblies:	1
CRI (minimum):	80	Intervallo temperatura ambiente:	from -30°C to 50°C.
Colour temperature [K]:	3000	Control:	DMX-RDM

Polar

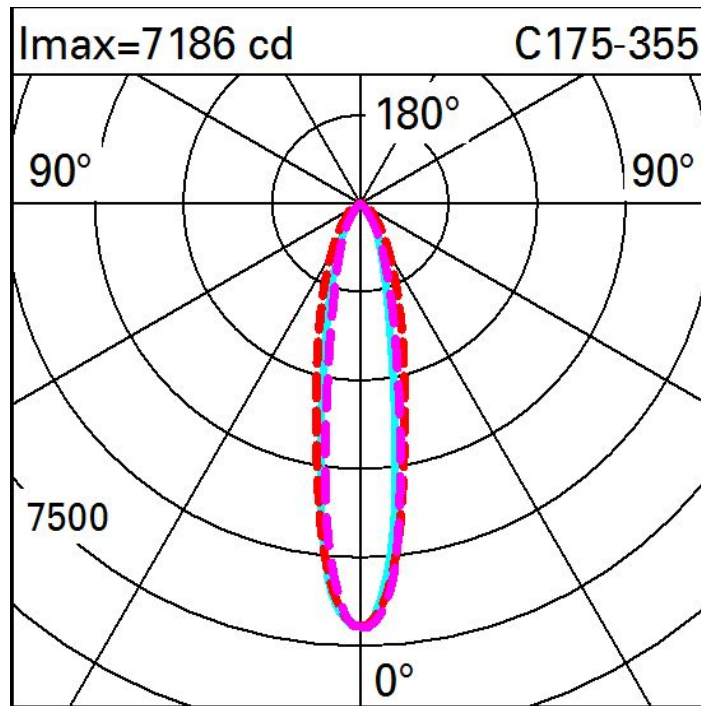

Illuminances

Lux												Wall distance = 1m	
3													
	0.4	0.8	2	5	11	15	11	5	2	0.8	0.4		
2	2	5	9	15	26	33	26	15	9	5	2		
	4	6	12	26	50	64	50	26	12	6	4		
1	4	7	14	32	55	71	55	32	14	7	4		
	5	9	17	30	47	62	47	30	17	9	5		
0													
	m	-2	-1	0	1	2	3						