

**LEDPLUS CIRCULAR
MEDIUM**

1.2611- 13
LAMPING FINISH


LEDPLUS is a ground / wall recessed luminaire. It is composed of machined stainless steel components and sealed with internal gaskets and a glass lens. It's maximum surface temperature is below 104°F (40°C).

LAMPING: 0.4W LED COOL WHITE 6000K, 24Vdc






PROJECT NAME: _____

TYPE: _____ **QTY:** _____

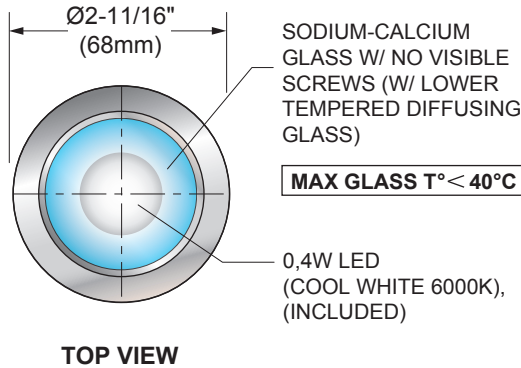LAST UPDATE: JULY 18, 2018




ACCESSORIES (TO BE ORDERED SEPARATELY)

-  **1.6943** - PLASTIC CASING FOR WALL & GROUND INSTALLATION + TOP END CAP Ø2-1/2"(62mm) X 6-1/8"(155mm)H
-  **1.6941** - ALUMINUM CASING FOR WALL INSTALLATION + TOP END CAP □6-11/16"(169mm) X 4"(101mm)H
-  **1.9579** - ADAPTER FOR OUTER CASING (FOR 1.6943)
-  **1.9580** - ADAPTER FOR OUTER CASING (FOR 1.6941)
-  **1.9583** - SUCTION CUP

POWER SUPPLY OPTIONS

- Dry location**
- 4444-0024-010-120-ND:**
Input: 120V AC, Dry location, non dimmable
Quantity: one to twenty five (1 to 25) fixtures
DIM: 6" X 4" X 3" (152 X 102 X 76mm)
Max distance 18Ga: 20ft (6m)*.
 - 4444-0024-020-120-ND:**
Input: 120V AC, Dry location, non dimmable
Quantity: one to forty two (1 to 50) fixtures
DIM: 6" X 4" X 3" (152 X 102 X 76mm)
Max distance 18Ga: 30ft (9m)*.
 - 4444-0024-025-UNV-ND:**
Input: 120-277V AC, Dry location, non dimmable
Quantity: one to sixty-two (1 to 62) fixtures
DIM: 6" X 4" X 3" (152 X 102 X 76mm)
Max distance 18Ga: 20ft (6m)*.
- Wet location**
- 4548-0024-010-120-ND:**
Input: 120V AC, Wet location, non dimmable
Quantity: one to twenty five (1 to 25) fixtures
DIM: 7" X 4" X 3" (178 X 102 X 76mm)
Max distance 18Ga: 20ft (6m)*.
 - 4548-0024-017-120-ND:**
Input: 120V AC, Wet location, non dimmable
Quantity: one to forty two (1 to 42) fixtures
DIM: 7" X 4" X 3" (178 X 102 X 76mm)
Max distance 18Ga: 30ft (9m)*.
 - 4548-0024-025-UNV-ND:**
Input: 120-277V AC, Wet location, non dimmable
Quantity: one to sixty-two (1 to 62) fixtures
DIM: 7" X 4" X 3" (178 X 102 X 76mm)
Max distance 18Ga: 20ft (6m)*.

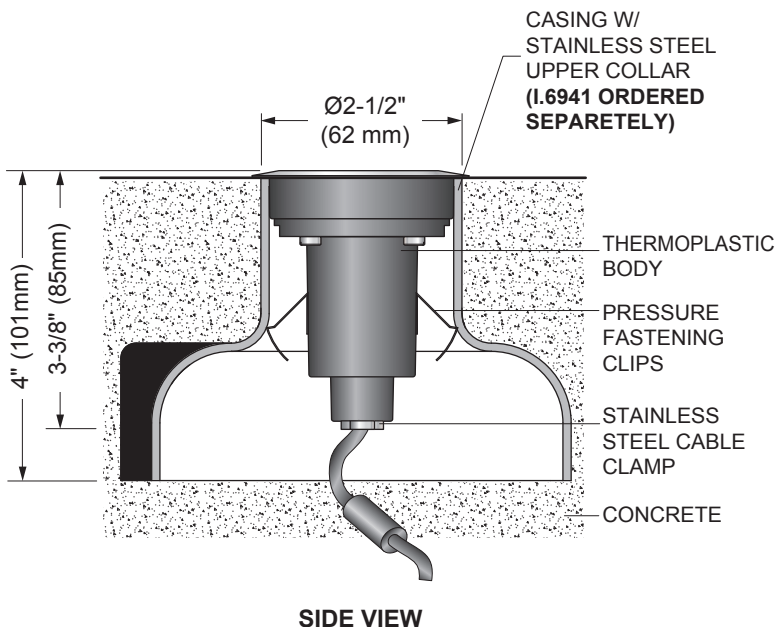

IP 68 IK 09

USE SUITABLE REMOTE POWER SUPPLY



9320 Boul. St-Laurent,
suite 100, Montréal (Québec)
Canada H2N 1N7
P.: 514.523.1339 F.: 514.525.6107

**LEDPLUS CIRCULAR
MEDIUM**