


Last information update: October 2024

Product configuration: QQ05

QQ05: Fixed circular recessed luminaire - Ø133 mm - neutral white - medium optic - UGR<19

**Product code**

QQ05: Fixed circular recessed luminaire - Ø133 mm - neutral white - medium optic - UGR<19

Technical description

Fixed round luminaire designed to use a LED lamp with C.O.B. technology. Version without rim for mounting flush with ceiling. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with LED lamp in neutral white colour tone (4,000K). General light emission, with controlled luminance UGR<19 1500 cd/m² α>65° medium optic.

Installation

Installation flush with the ceiling is for false ceilings 12.5 mm thick

Colour

Aluminium (12)

Weight (Kg)

1.08


Mounting

ceiling recessed

Wiring

product complete with TRIAC components

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	2196	CRI (minimum):	80
W system:	17.7	Colour temperature [K]:	4000
lm source:	2500	MacAdam Step:	2
W source:	16	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	124.1	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	88	Number of optical assemblies:	1
Beam angle [°]:	24°	Control:	TRIAC


Polar

Imax=5946 cd		CIE		Lux			
90°	180°	nL 0.88		h	d	Em	Emax
		98-100-100-100-88		2	0.9	1123	1486
		UGR 17.7-17.7		4	1.7	281	372
		DIN		6	2.6	125	165
		A.61		8	3.4	70	93
		UTE					
		0.88A+0.00T					
		F*1=97.8					
		F*1+F*2=999					
		F*1+F*2+F*3=1000					
		CIBSE					
		LG3 L<1500 cd/m ² at 65°					
		UGR<19 L<1500 cd/mq @ 65°					
α=24°							

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	79	74	71	69	74	71	70	68	77
1.0	82	78	76	73	77	75	75	72	82
1.5	86	84	81	79	83	81	80	77	88
2.0	89	87	85	84	86	84	83	81	92
2.5	91	89	88	87	88	87	86	84	95
3.0	92	91	90	89	89	89	88	85	97
4.0	93	92	92	91	91	90	89	87	99
5.0	94	93	93	92	92	91	90	88	100

Luminance curve limit

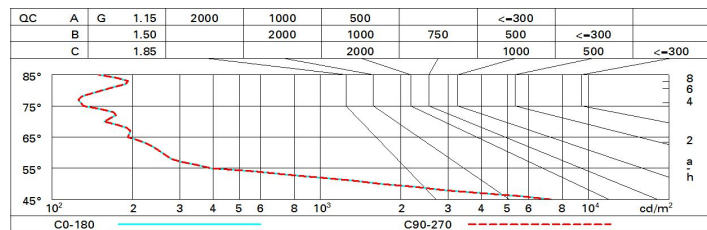

UGR diagram

Corrected UGR values (at 2500 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	18.2	18.9	18.5	19.1	19.4	18.2	18.9	18.5	19.1	19.4
	3H	18.1	18.7	18.4	19.0	19.2	18.1	18.7	18.4	19.0	19.2
	4H	18.0	18.6	18.4	18.9	19.2	18.0	18.6	18.4	18.9	19.2
	6H	18.0	18.5	18.3	18.8	19.1	18.0	18.5	18.3	18.8	19.1
	8H	17.9	18.4	18.3	18.7	19.1	17.9	18.4	18.3	18.7	19.1
	12H	17.9	18.3	18.3	18.7	19.0	17.9	18.3	18.3	18.7	19.0
4H	2H	18.0	18.6	18.4	18.9	19.2	18.0	18.6	18.4	18.9	19.2
	3H	17.9	18.3	18.3	18.7	19.0	17.9	18.3	18.3	18.7	19.0
	4H	17.8	18.2	18.2	18.6	19.0	17.8	18.2	18.2	18.6	19.0
	6H	17.7	18.1	18.1	18.5	18.9	17.7	18.1	18.1	18.5	18.9
	8H	17.7	18.0	18.1	18.4	18.8	17.7	18.0	18.1	18.4	18.8
	12H	17.6	17.9	18.1	18.3	18.8	17.6	17.9	18.1	18.3	18.8
8H	4H	17.7	18.0	18.1	18.4	18.8	17.7	18.0	18.1	18.4	18.8
	6H	17.6	17.8	18.0	18.3	18.8	17.6	17.8	18.0	18.3	18.8
	8H	17.5	17.7	18.0	18.2	18.7	17.5	17.7	18.0	18.2	18.7
	12H	17.5	17.7	18.0	18.1	18.7	17.5	17.7	18.0	18.1	18.7
12H	4H	17.6	17.9	18.1	18.3	18.8	17.6	17.9	18.1	18.3	18.8
	6H	17.5	17.7	18.0	18.2	18.7	17.5	17.7	18.0	18.2	18.7
	8H	17.5	17.7	18.0	18.1	18.7	17.5	17.7	18.0	18.1	18.7
Variations with the observer position at spacing:											
S =	1.0H	4.4 / -24.6					4.4 / -24.6				
	1.5H	7.2 / -25.8					7.2 / -25.8				
	2.0H	9.2 / -26.2					9.2 / -26.2				